

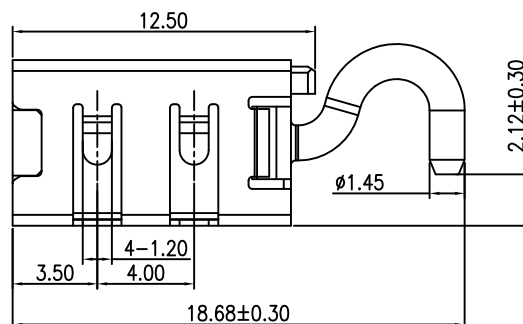

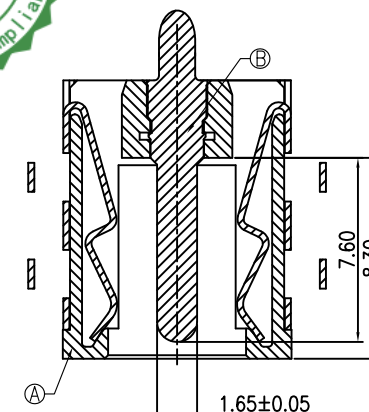
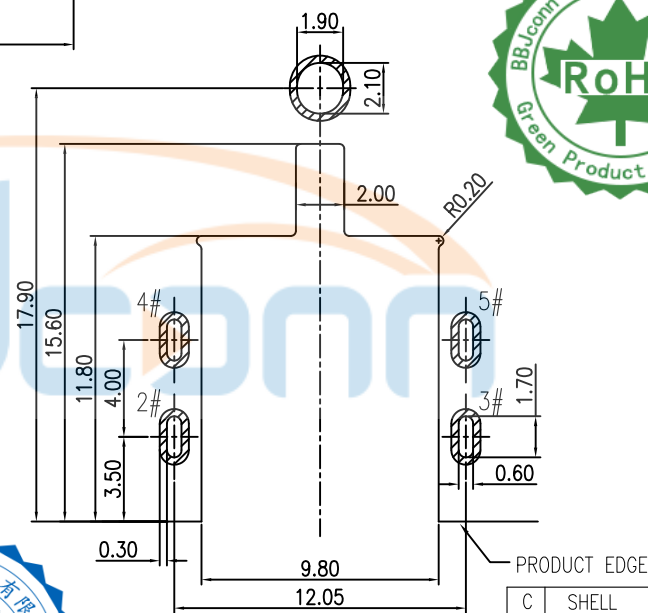
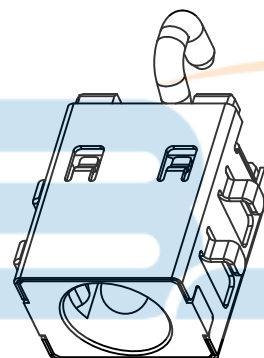






1. RATING: DC 30V 15A
2. CONTACT RESISTANCE:
30mΩ MAX(INITIAL).
50mΩ MAX(FINAL).
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES

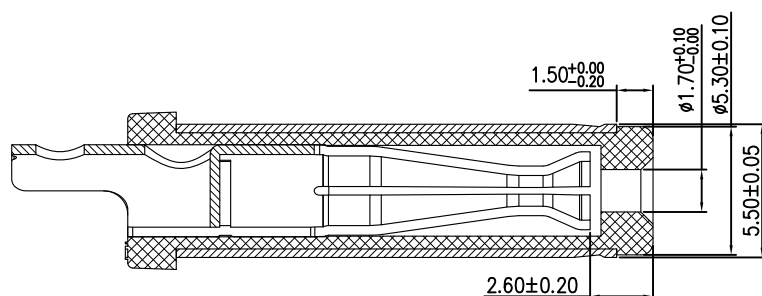

C	SHELL	C5210	Ni 40u" MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH /Ni 40u" MIN.	1
A	HOUSING	PA10T	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY



DIM TOL DIM TOL X. ±0.50 X. ±2' X.X ±0.30 X.X ±1' X.XX ±0.20 X.XX — X.XXX ±0.10 X.XXX —				 深圳市步步精科技有限公司 TITIF· DC插座 DC550170-1193-20000H 1.65针 全铜 四脚插 沉板4.03 带弯针 PA10T黑胶 DC30V 15A					
DRAWN/ DATE		设计 LHC		SIZE:A4		UNIT:MM.		PART.NO: 116-302-040005-P1G	
CHECKED/ DATE		审核 LYX		SCALE: 1:1		PROJECTION		 REV.: 版本	
APPROVED/ DATE		核准 LJP		DWG. PATH		0386-2		SHEET: 页码	

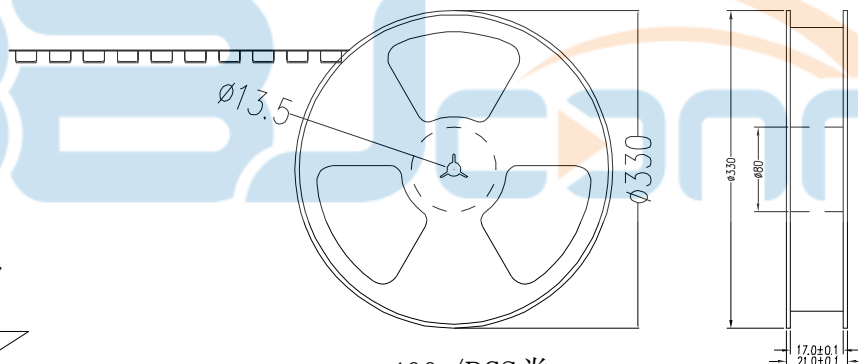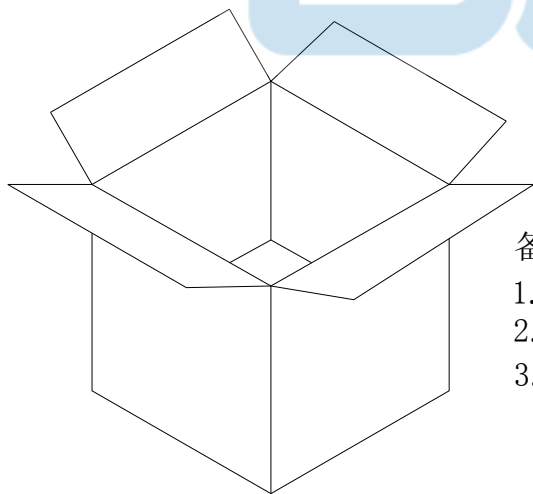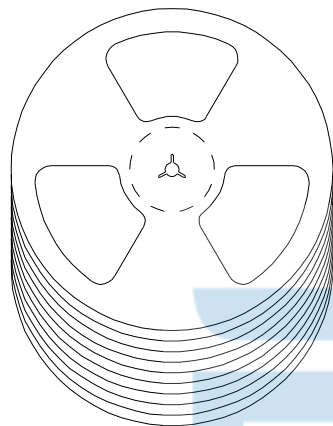

400 /PCS卷

备注:

1. 包装数量: 400 /PCS/卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		



深圳市步步精科技有限公司

TITLE: DC插座 DC550170-1193-20000H 1.65针 全铜
四脚插 沉板4.03 带弯针 PA10T黑胶 DC30V 15A

TOLERANCE UNSPECIFIED		深圳市步步精科技有限公司 TITLE: DC插座 DC550170-1193-20000H 1.65针 全铜 四脚插 沉板4.03 带弯针 PA10T黑胶 DC30V 15A			
.0	±0.35				
.00	±0.25				
.000	±0.15				
X.°	±2.00°				
CUSTOMER DRAWING					
DRAWN/ DATE	设计 LHC	SIZE:A4	UNIT:MM.	PART. NO: 116-302-040005-P1G	
CHECKED/ DATE	审核 LYX	SCALE: 1:1		PROJECTION	REV.: 版本
APPROVED/ DATE	核准 LJP	DWG. PATH		0386-2	SHEET: 页码