



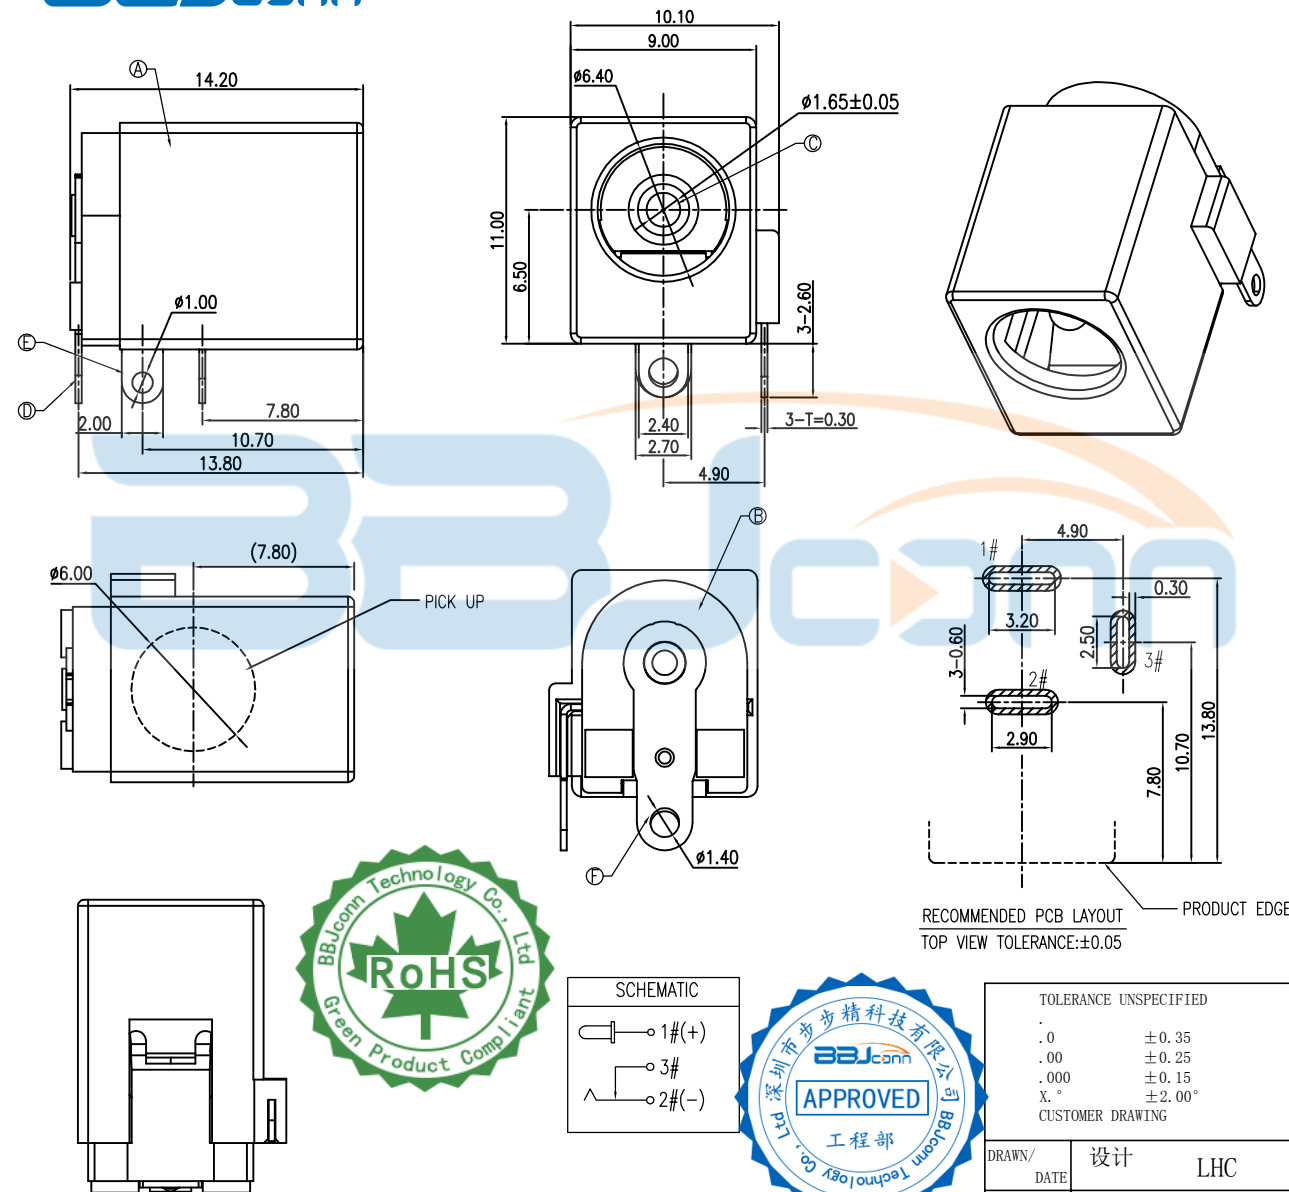


SPECIFICATION:

1. RATING: DC 50V 3A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 6N MIN.
7. DURABILITY: 5,000 CYCLES

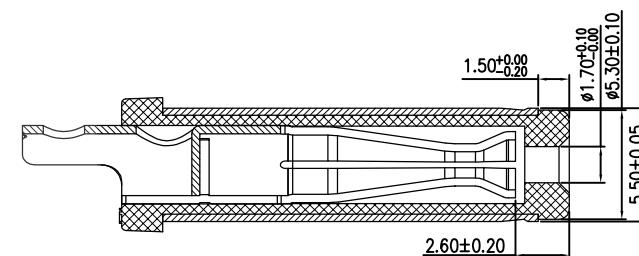

MATING PLUG
DP550170-0192-60000H

F	PLATE	C2680	Sn60u" MIN./Ni 40u" MIN.	1
E	SHUNT	C2680	Sn60u" MIN./Ni 40u" MIN.	1
D	SPRING	C5191	Sn60u" MIN./Ni 40u" MIN.	1
C	CENTER PIN	H65	GOLD FLASH/Ni 40u" MIN.	1
B	COVER	PA10T	BLACK	1
A	HOUSING	PA10T	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY









TOLERANCE UNSPECIFIED	
.0	±0.35
.00	±0.25
.000	±0.15
X.°	±2.00°
CUSTOMER DRAWING	
DRAWN/DATE	设计 LHC
CHECKED/DATE	审核 LYX
APPROVED/DATE	核准 LJP




TITLE: DC插座 DC550170-1231-00000H 1.65针
三脚插 L=14.20 H=11.00 全铜 PA10T黑胶 DC50V 3A

SIZE:A4	UNIT:MM.	PART.NO: 116-302-030002-P1G	REV.: 版本
SCALE: 1:1	PROJECTION	0386-2	SHEET: 页码
DWG. PATH			

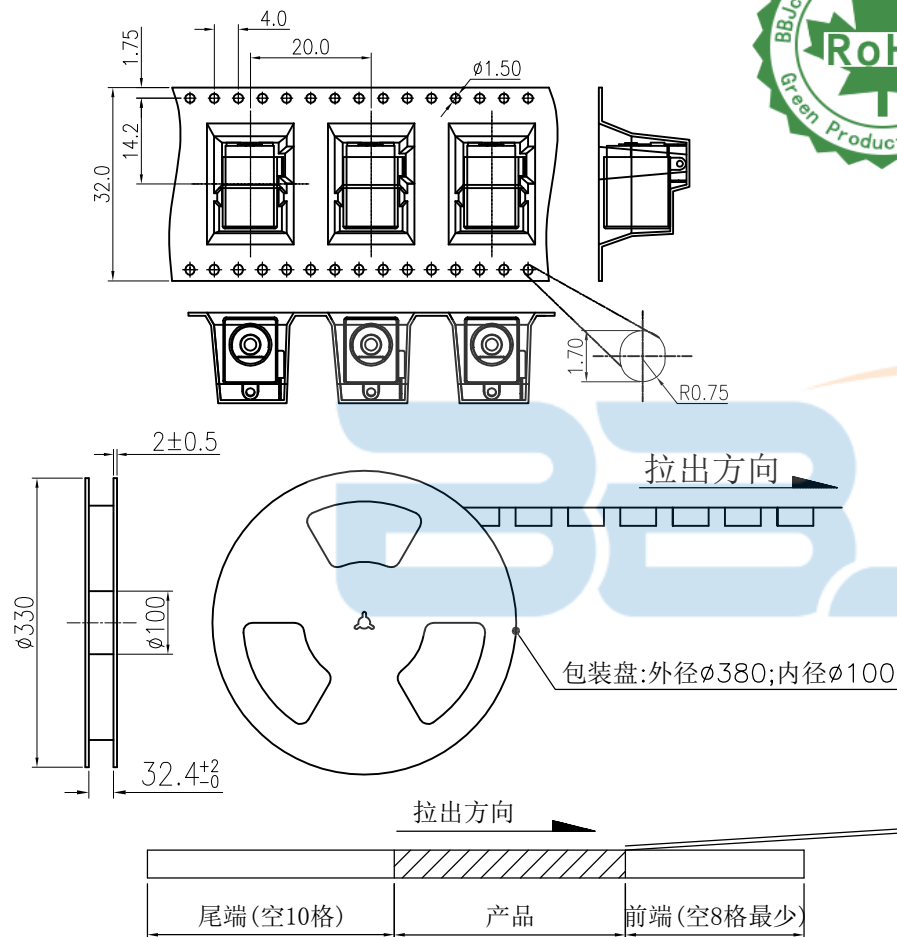

1. 材料规格:
 - 1.1 载带:透明
 - 1.2 包装盘:蓝色
 - 1.3 纸箱: L=335,W=335,H=380
2. 包装数量:
200PCS/卷, 10卷(2000PCS)/箱
3. 上盖带剥离力: 0.1N~0.7N(10~70gf);
剥离角度: 165°~180°
剥离速度: 300mm/分钟.



TOLERANCE UNSPECIFIED . .0 ±0.35 .00 ±0.25 .000 ±0.15 X. ° ±2.00° CUSTOMER DRAWING			 深圳市步步精科技有限公司		
			TITLE: DC插座 DC50170-1231-00000H 1.65针 三脚插 L=14.20 H=11.00 全铜 PA10T黑胶 DC50V 3A		
DRAWN/ DATE	设计 LHC	SIZE: A4	UNIT: MM.	PART. NO: 116-302-030002-P1G	
CHECKED/ DATE	审核 LYX	SCALE: 1:1		PROJECTION 	REV.: 版本
APPROVED/ DATE	核准 LJP	DWG. PATH		0386-2	SHEET: 页码