
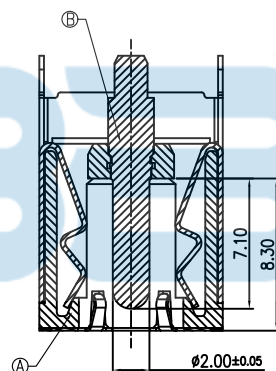


REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

SPECIFICATION:


1. RATING: DC 20V 20A
2. CONTACT RESISTANCE:
30mΩ MAX. (INITIAL)
50mΩ MAX. (FINAL)
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES




SECTION A-A



E	MYLAR			1
D	GROUND	SUS 304		1
C	SHELL	COPPER ALLOY	Ni 40u"MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH/Ni 40u" MIN.	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

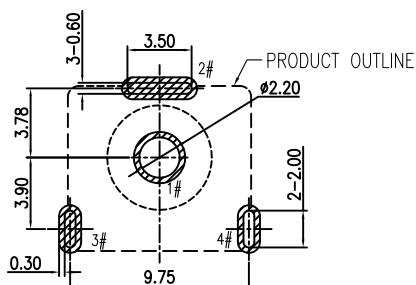

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE:±0.05

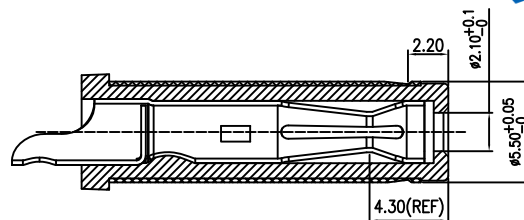

MATING PLUG
DP550200-0129-60000H

TOLERANCE UNSPECIFIED	
.0	±0.35
.00	±0.25
.000	±0.15
X.°	±2.00°
CUSTOMER DRAWING	

BBJconn 深圳市步步精科技有限公司





TITLE:
DC插座 DC550200-1069-20000H 2.0针 180度 三脚插 H=13.00 DC20V 20A

DRAWN/ DATE	设计 TSP	SIZE:A4	UNIT:MM.	PART.NO:	116-305-030002-P1G
CHECKED/ DATE	审核 LYX	SCALE: 1:1	PROJECTION	REV.:	版本
APPROVED/ DATE	核准 LJP	DWG. PATH	0386-2	SHEET:	页码




REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

拉出方向

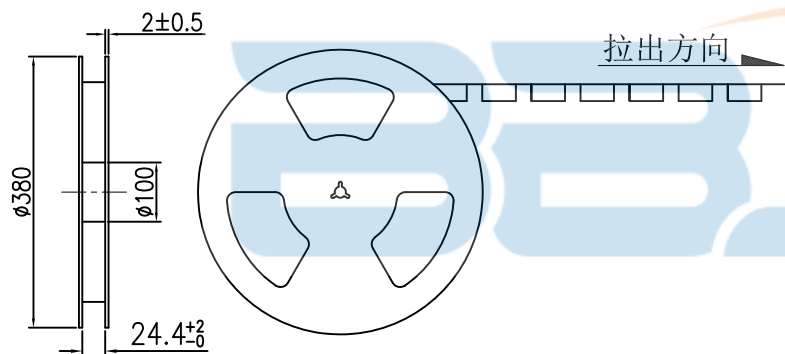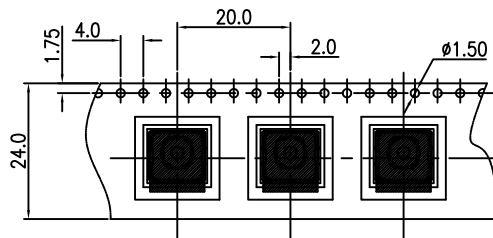

拉出方向




总共10层

PE袋:

外箱, 1PCS

透明胶带



备注:

- 材料规格:
 - 载带: $T=0.50\text{mm}$
 - 包装盘: 蓝色
 - 纸箱: $L=385, W=385, H=380$
- 包装数量:
250PCS/卷, 10卷(2500PCS)/箱
- 上盖带拔离力: $0.1\text{N}\sim 0.7\text{N}$ ($10\sim 70\text{gf}$);
拔离角度: $165^\circ\sim 180^\circ$;
拔离速度: 300mm/分钟.



TOLERANCE UNSPECIFIED			深圳市步步精科技有限公司			
.0	±0.35					
.00	±0.25					
.000	±0.15					
X.°	±2.00°					
CUSTOMER DRAWING			TITLE: DC插座 DC550200-1069-20000H 2.0针 180度 三脚插 H=13.00 DC20V 20A			
DRAWN/ DATE	设计	TSP	SIZE:A4	UNIT:MM.	PART.NO: 116-305-030002-P1G	
CHECKED/ DATE	审核	LYX	SCALE: 1:1	PROJECTION		REV.: 版本
APPROVED/ DATE	核准	LJP	DWG. PATH	0386-2		SHEET: 页码