
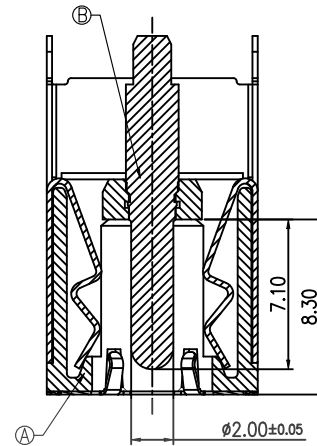





REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

SPECIFICATION:



1. RATING: DC 20V 20A
2. CONTACT RESISTANCE:
30mΩ MAX. (INITIAL)
50mΩ MAX. (FINAL)
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES

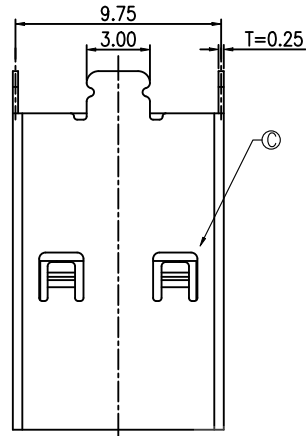


SECTION A-A

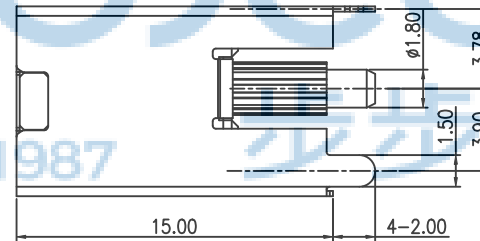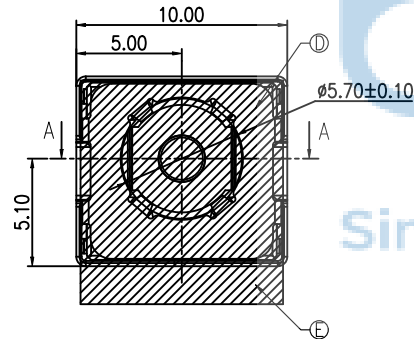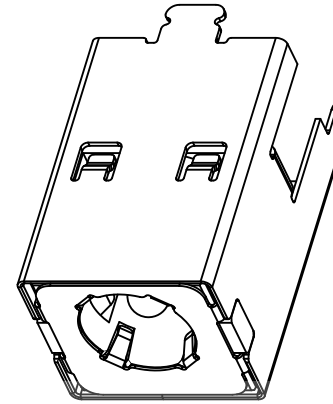

SCHEMATIC

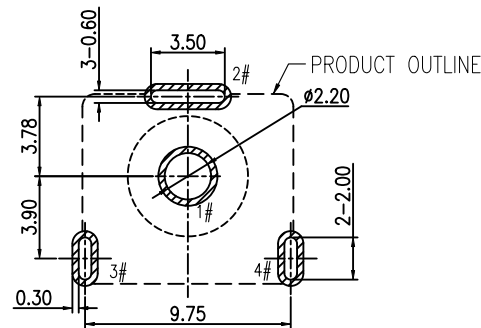

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE:±0.05

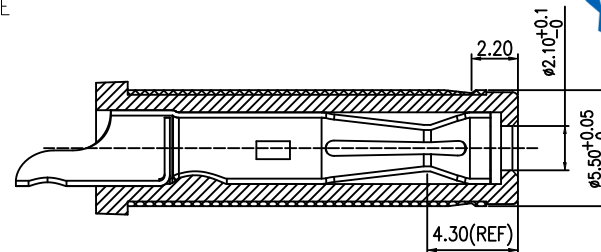






MATING PLUG



NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
E	MYLAR			1
D	GROUND	SUS 304		1
C	SHELL	COPPER ALLOY/C5210	Ni 40u"MIN.	1
B	CENTER PIN	BRASS/HBI59-1	GOLD FLASH/Ni 40u" MIN.	1
A	HOUSING	HIGH TEMP. THERMOPLASTIC/PA10T	BLACK	1

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0386-2

深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" X'': ±2" X'X': ±1"	
NAME: DC插座 DC550200-1070-20000H 2.0针 180度 H=15.0 三脚插 全铜 贴唛拉编带		PJ. NO.:116-305-030003-P1G	
APPD. JM_Zheng	CHKD. LYX	SIZE: A4 DRW NO.:	
DR. LHC	FINISH: SEE NOTES		MAT'L.: SEE NOTES
SCALE: N/A		REV.: A0	UNIT: mm PAGE: 1/2

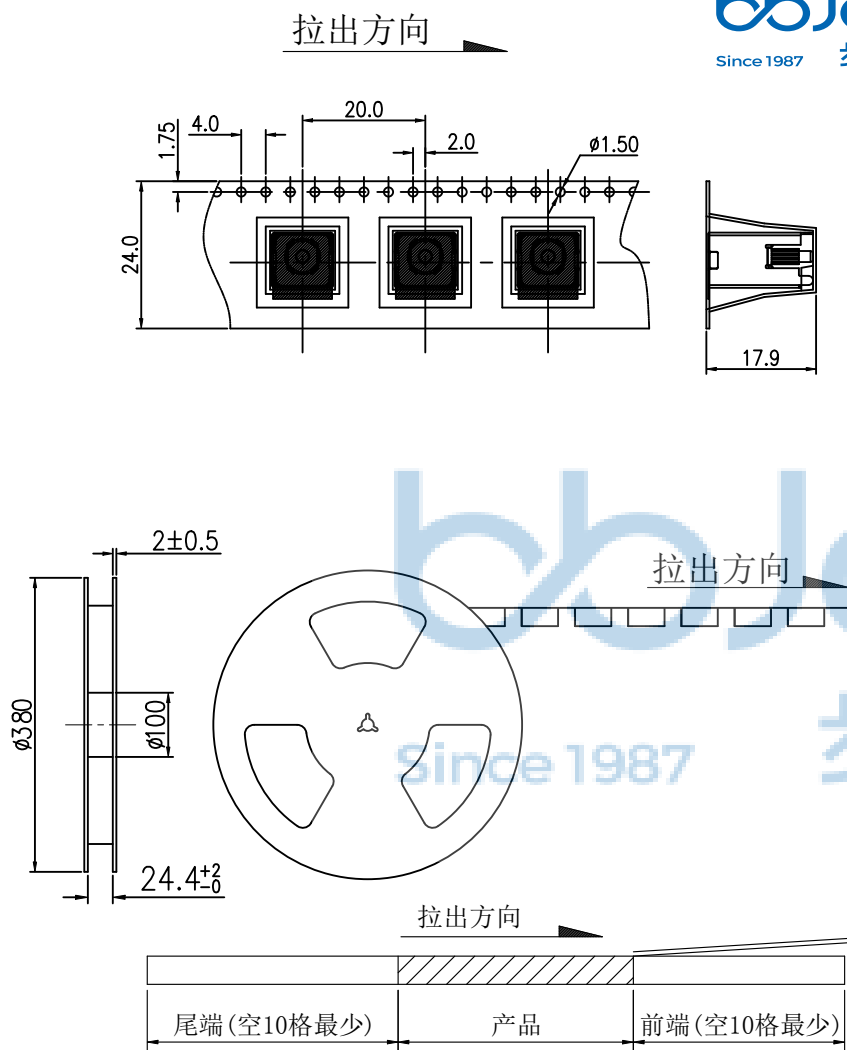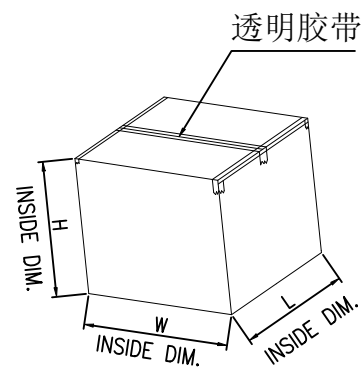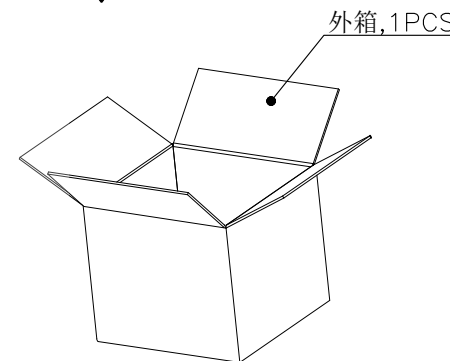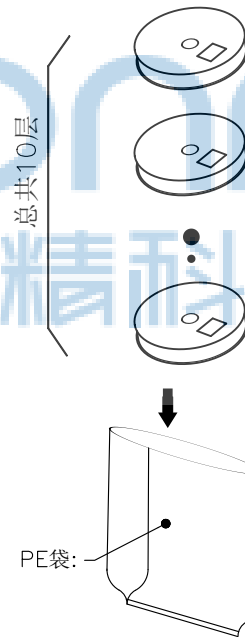

- 备注:
- 材料规格:
 - 载带: T=0.50mm
 - 包装盘: 蓝色
 - 纸箱: L=385, W=385, H=380
 - 包装数量:
 - 250PCS/卷, 10卷(2500PCS)/箱
 - 上盖带拔离力: 0.1N~0.7N(10~70gf);
拔离角度: 165°~180°;
拔离速度: 300mm/分钟.



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3° .X*: ±2° .XX*: ±1°		NAME: DC插座 DC550200-1070-20000H 2.0针 180度 H=15.0 三脚插 全铜 贴唛拉编带			
APPD.		JM_Zheng		PJ. NO.: 116-305-030003-P1G			
CHKD.		LYX		SIZE: A4 DRW NO.:			
PDWG.NO: 0386-2		DR.		FINISH: SEE NOTES MAT'L.: SEE NOTES			
		LHC		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2			