


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	

SPECIFICATION:

1. RATING: DC 20V 20A
2. CONTACT RESISTANCE:
30m Ω MAX. (INITIAL)
50m Ω MAX. (FINAL)
3. INSULATION RESISTANCE: 100 M Ω MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES



SECTION A-A

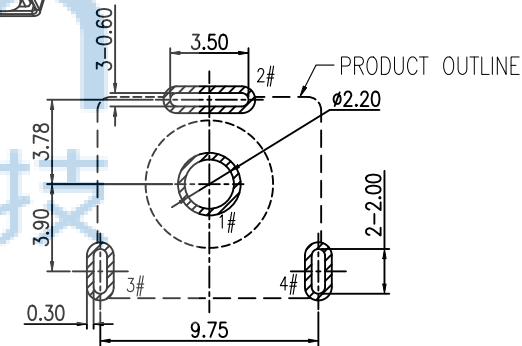

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE: ± 0.05

SCHEMATIC	
	1#(+)
	2#/3#4#(-)

E	MYLAR		1
D	GROUND	SUS 304	1
C	SHELL	COPPER ALLOY	Ni 40u"MIN. 1
B	CENTER PIN	BRASS	GOLD FLASH/Ni 40u" MIN. 1
A	HOUSING	HIGH TEMP.THERMOPLASTIC BLACK	1
NO	DESCRIPTION	MATERIAL	REMARKS QTY






THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		.X: ± 0.38 .X': $\pm 3'$.XX: ± 0.25 .X': $\pm 2'$.XXX: ± 0.13 .X': $\pm 1'$		NAME: DC插座 DC550250-1078-20000H 2.5针 180度 H=15.0 三脚插 全铜	
APPD.	JM_Zheng	23/05'02		P.J. NO. : 116-305-030004-P1G	
CHKD.	LYX	23/05'02		SIZE: A4	DRW NO.:
DR.	LHC	23/05'02		FINISH: SEE NOTES	MAT'L.: SEE NOTES
PDWG. NO: 0386-2				SCALE: N/A	REV.: A3 UNIT: mm PAGE: 1/1



MATING PLUG

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	

bbJconn
Since 1987 步步精科技

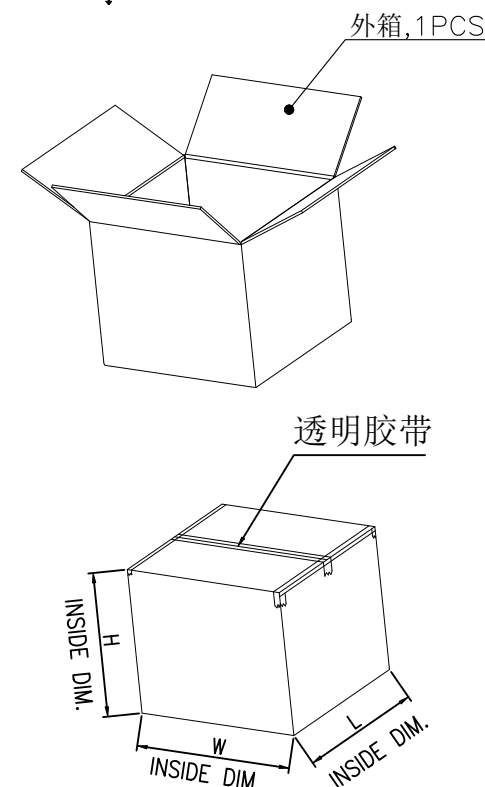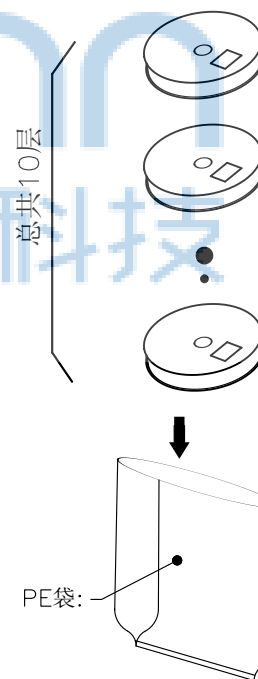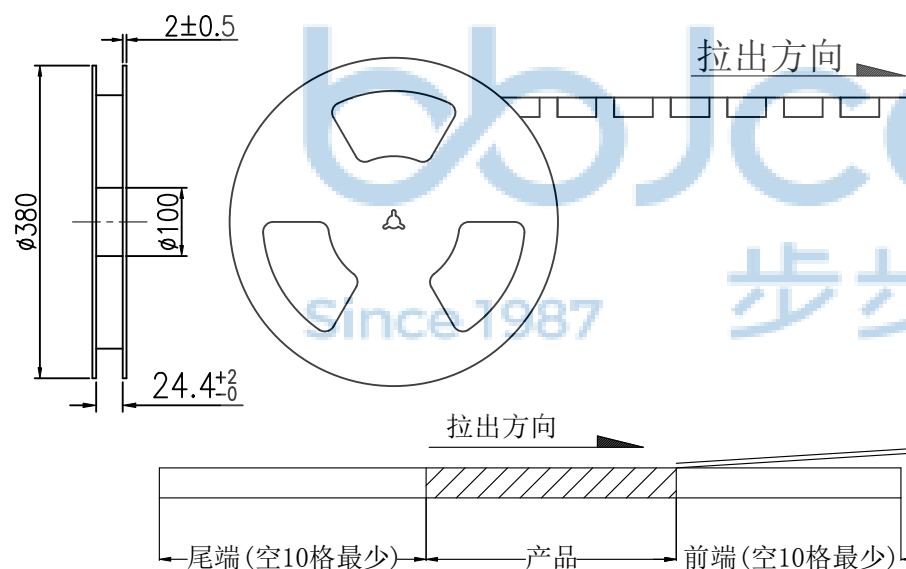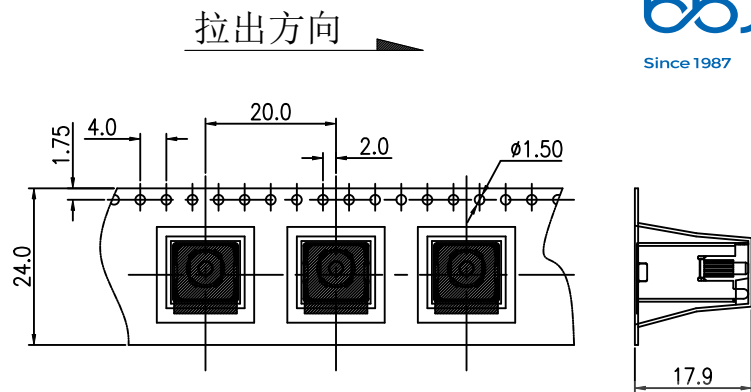

备注:

- 材料规格:
 - 载带: T=0.50mm
 - 包装盘: 蓝色
 - 纸箱: L=385, W=385, H=300
- 包装数量:
 - 250PCS/卷, 10卷(2500PCS)/箱
- 上盖带剥离力: 0.1N~0.7N(10~70gf);
剥离角度: 165°~180°;
剥离速度: 300mm/分钟.



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3° .X*: ±2° .XX*: ±1°		NAME: DC插座 DC550250-1078-20000H 2.5针 180度 H=15.0 三脚插 全铜			
APPD. JM_Zheng 23/05/02		CHKD. LYX 23/05/02		P.J. NO.: 116-305-030004-P1G SIZE: A4 DRW NO.:			
DR. LHC 23/05/02		FINISH: SEE NOTES		MAT'L.: SEE NOTES			
PDWG. NO: 0386-2		SCALE: N/A		REV.: A3		UNIT: mm	
						PAGE: 1/1	