

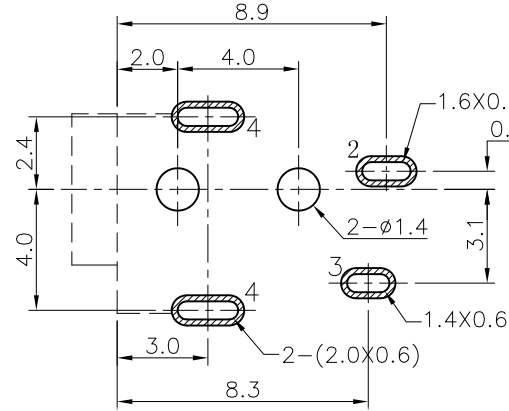
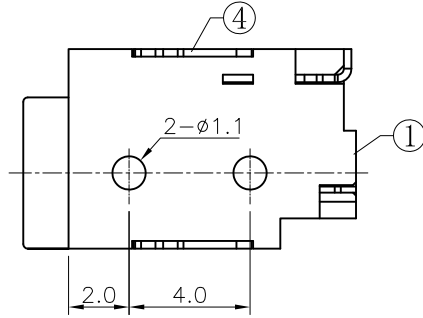
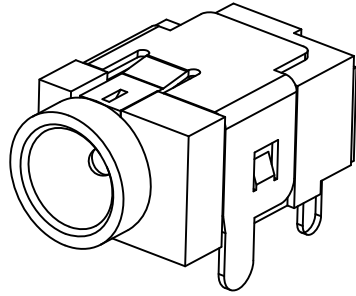
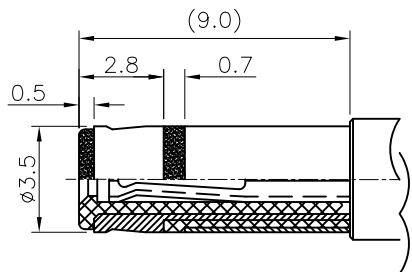



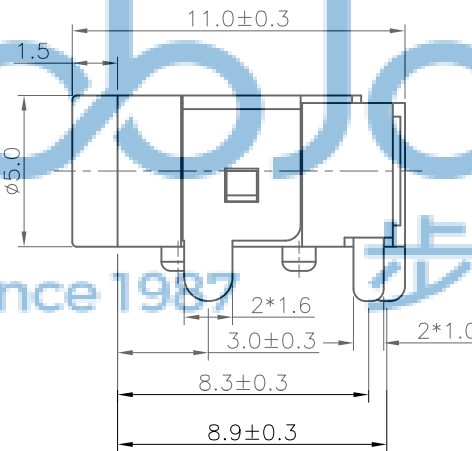


P. C. B LAYOUT TOP VIEW

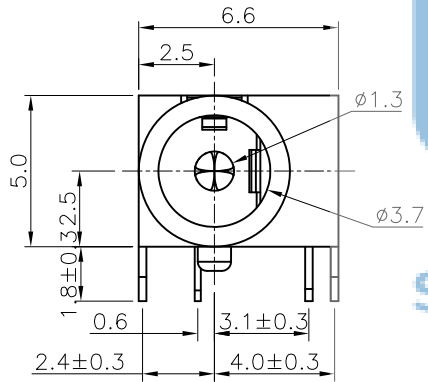

RECOMMENDED PLUG

SCHEMATIC



REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

SPECIFICATION

1. Rating : DC 30V 1.0A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M \Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 2-30N;
6. life test: 5,000 cycles.



4	CONTACT FOOT	1	BRONZE	Ag-Plating
3	SPRING	1	BRONZE	Ag-Plating
2	PIN	1	BRASS	Ag-Plating
1	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING


深圳市步步精科技有限公司

TITLE:
DC座 1.3针 全铜 四脚插 带柱 L=11.0 (DC350135-1334-20000H)

TOLERANCE UNSPECIFIED	
.0	± 0.35
.00	± 0.25
.000	± 0.15
X.°	$\pm 2.00^\circ$
CUSTOMER DRAWING	
DRAWN/ DATE	设计 TSP
CHECKED/ DATE	审核 LYX
APPROVED/ DATE	核准 LJP


SIZE:A4	UNIT:MM.	PART.NO: 116-302-040006-P1G
SCALE: 1:1	PROJECTION	REV.: 版本
DWG. PATH	0386-2	SHEET: 页码

PE袋规格:***X*** (以实际出货为准)

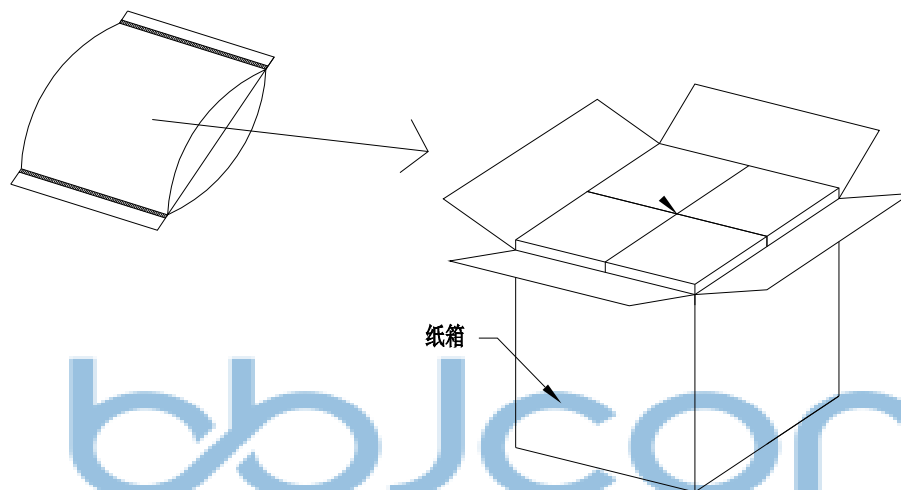


bbJconn
Since 1987 步步精科技

成品标签



1. 包装要求:

- 1.1 每PE袋包装 500 pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计10000PCS
- 1.4 纸箱外贴上标签

TOLERANCE UNSPECIFIED . .0 ±0.35 .00 ±0.25 .000 ±0.15 X. ° ±2.00° CUSTOMER DRAWING			 深圳市步步精科技有限公司 TITLE: DC座 1.3针 全铜 四脚插 带柱 L=11.0 (DC350135-1334-20000H)		
DRAWN/ DATE	设计	TSP	SIZE:A4	UNIT:MM.	PART.NO: 116-302-040006-P1G
CHECKED/ DATE	审核	LYX	SCALE: 1:1	PROJECTION 	REV.: 版本
APPROVED/ DATE	核准	LJP	DWG. PATH	0386-2	SHEET: 页码