

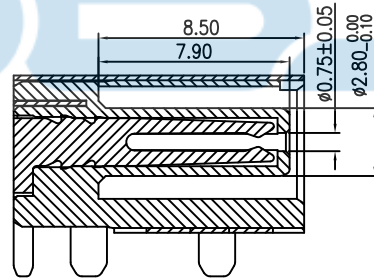





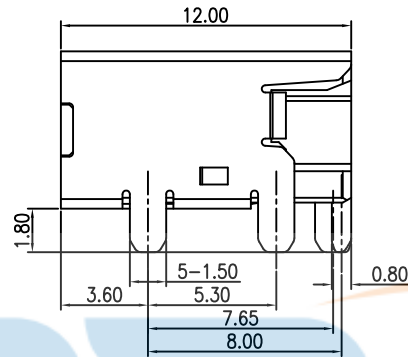



| REV. | DESCRIPTION | NAME | DATE |
|------|-------------|------|------|
| A    | NEWS ISSUE  |      |      |
|      |             |      |      |

SPECIFICATION:

1. RATING: DC 20V 6.5A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 6N MIN.
7. DURABILITY: 5,000 CYCLES





SECTION A-A

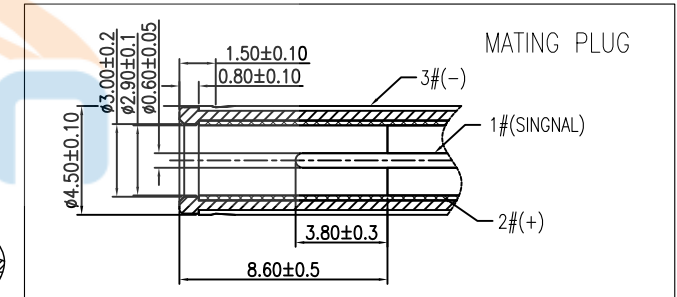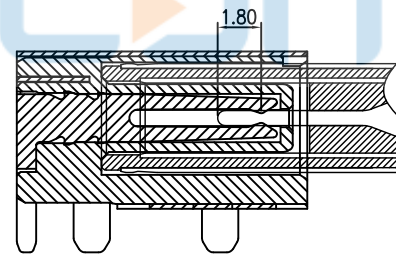

MATING PLUG

SCHEMATIC

- 2#(+)  
—○ 1#(SIGNAL)  
—○ 3#(-)

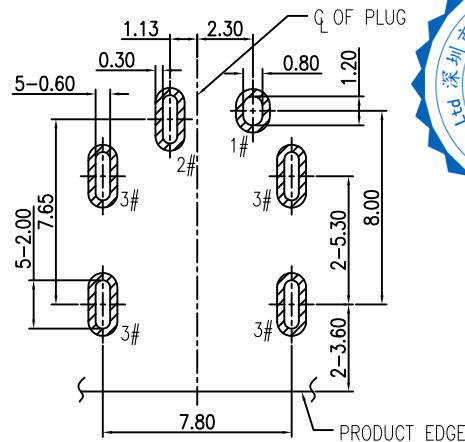

RECOMMENDED PCB LAYOUT  
TOP VIEW TOLERANCE: ±0.05



|     |             |          |                                   |     |
|-----|-------------|----------|-----------------------------------|-----|
| D   | SHELL       | C5210    | Ni 50u"MIN.                       | 1   |
| C   | SPRING      | C5210    | GOLD FLASH/MATTE TIN 80u"/Ni 40u" | 1   |
| B   | CENTER PIN  | C5210    | GOLD FLASH/MATTE TIN 80u"/Ni 40u" | 1   |
| A   | HOUSING     | PA10T    | BLACK                             | 1   |
| NO. | DESCRIPTION | MATERIAL | REMARKS                           | QTY |


DECIMALS: ANGLES:

| DIM   | TOL   | DIM   | TOL |
|-------|-------|-------|-----|
| X.    | ±0.50 | X.    | ±2° |
| X.X   | ±0.30 | X.X   | ±1° |
| X.XX  | ±0.20 | X.XX  | —   |
| X.XXX | ±0.10 | X.XXX | —   |

深圳市步步精科技有限公司

TITLE: DC座 DC450060-0355-20000H 1.05针 全铜 六脚插


|                   |    |     |            |            |                              |           |
|-------------------|----|-----|------------|------------|------------------------------|-----------|
| DRAWN/<br>DATE    | 设计 | LYX | SIZE: A4   | UNIT: MM.  | PART. NO: 116-302-060003-P1G | REV.: 版本  |
| CHECKED/<br>DATE  | 审核 | HMY | SCALE: 1:1 | PROJECTION | 0386-2                       | SHEET: 页码 |
| APPROVED/<br>DATE | 核准 | LJP | DWG. PATH  |            |                              |           |



拉出方向



汽泡垫 2PCS

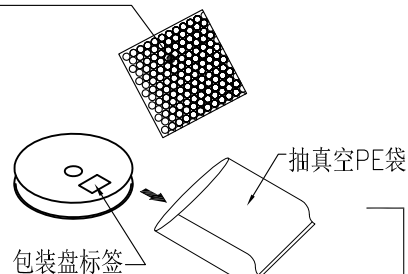

总共10层

PE袋:

外箱,1PCS

透明胶带

INSIDE DIM.

INSIDE DIM.

INSIDE DIM.

拉出方向

包装盘:外径 $\phi 330$ ;内径 $\phi 100$

覆盖带 350mm 最少.

拉出方向

尾端(空15格)

产品

前端(空格)

备注:

- 材料规格:
  - 载带:T=0.50mm,黑色
  - 包装盘:蓝色
  - 纸箱: L=335,W=335,H=300
- 包装数量:  
400PCS/卷, 10卷(4000PCS)/箱
- 上盖带拔离力: 0.1N~0.7N(10~70gf);  
拔离角度: 165°~180°;  
拔离速度: 300mm/分钟.



深圳市步步精科技有限公司

TITLE:

DC座 DC450060-0355-20000H 1.05针 全铜 六脚插

DRAWN/  
DATE

设计

LYX

CHECKED/  
DATE

审核

HMY

APPROVED/  
DATE

核准

LJP


SIZE:A4

UNIT:MM.

PART. NO: 116-302-060003-P1G

SCALE: 1:1

PROJECTION



REV.: 版本

DWG. PATH

0386-2

SHEET: 页码