
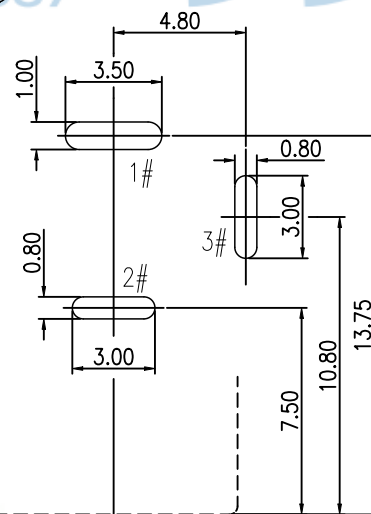
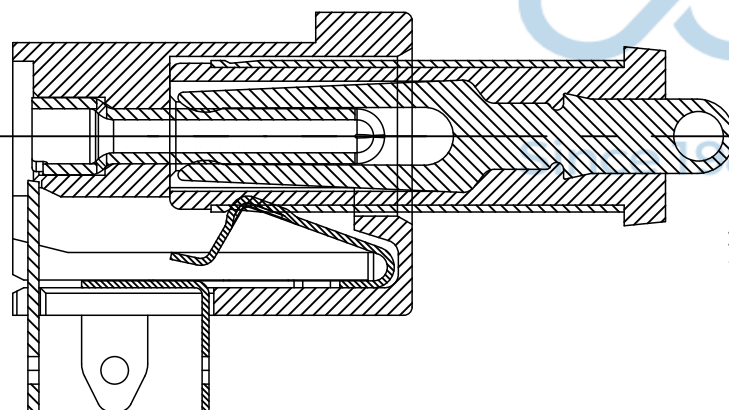
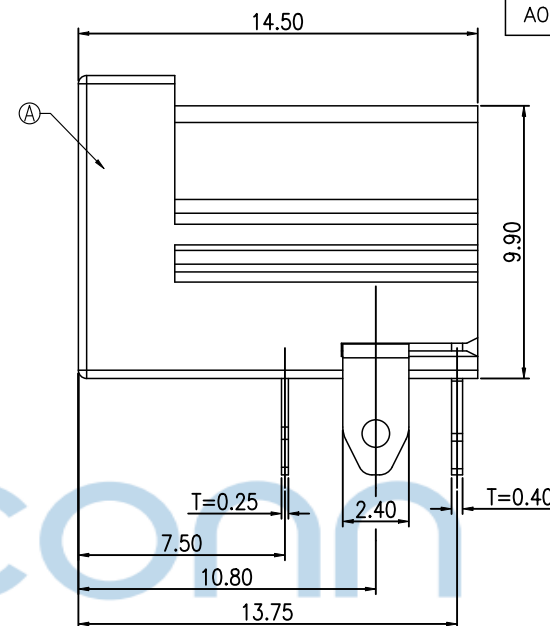
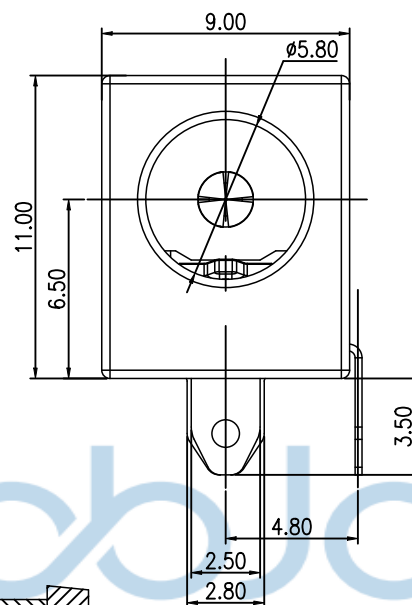


REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	LYX


SPECIFICATION:

1. RATING: DC 35V 7A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 40N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES

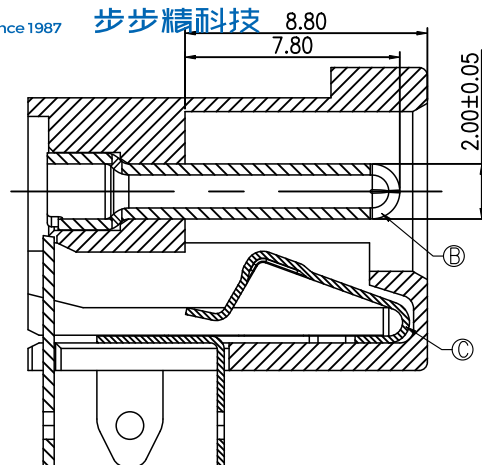

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE: ±0.05

SCHEMATIC	
	1#(+)
	2#/3#(-)

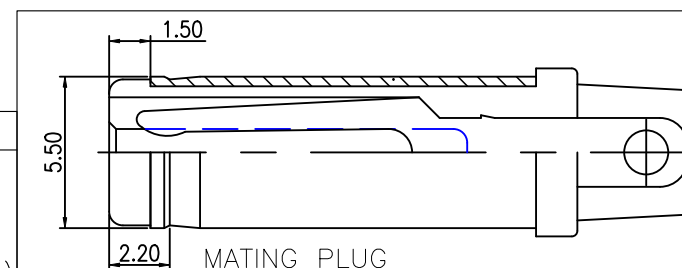



C	SPRING	COPPER ALLOY	Sn80u"/Ni 40u"	1
B	CENTER PIN	BRASS	Sn80u"/Ni 40u"	1
A	HOUSING	PBT	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.


深圳市步步精科技有限公司

.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3" .X*: ±2" .XX*: ±1"	NAME: DC座 DC550200 2.0针全铜 三脚插 7A 盒装
APPD CHKD	JM_Zheng Tang	PJ NO: 116-309-030005-P1G SIZE:A4
PDWG NO:0386-2	DR LYX	DRW NO: FINISH:SEE NOTES SCALE:N/A
		MAT'L:SEE NOTES REV:A0 UNIT:mm
		PAGE:1/2






DC JACK

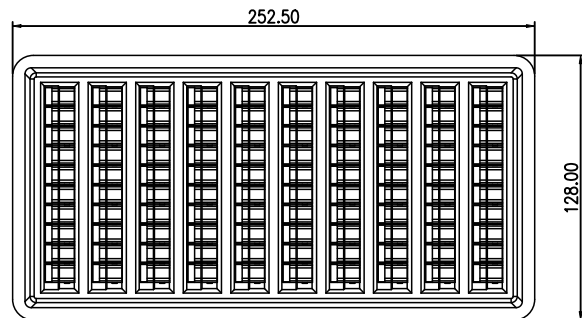



100PCS/盘

内标签

数 量	100/盒
	15*100=1500

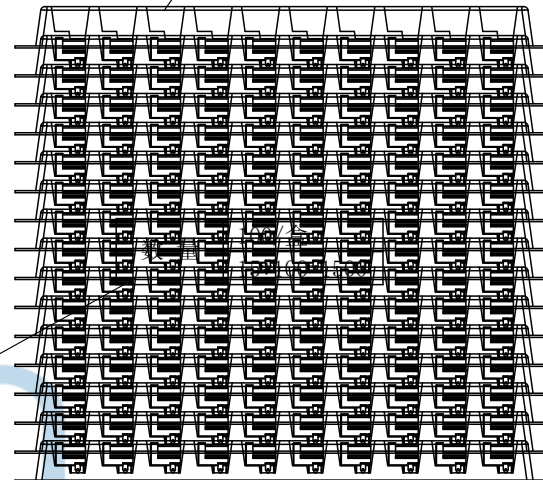

1500PCS/15盘/捆

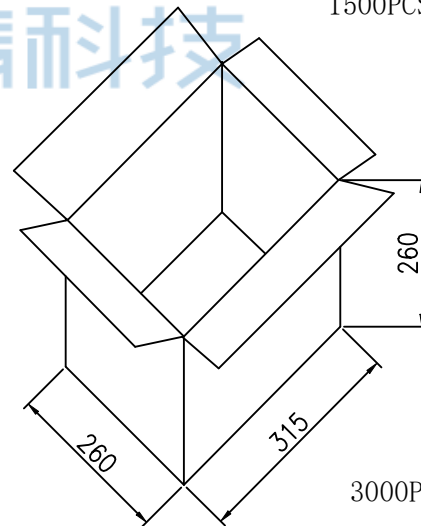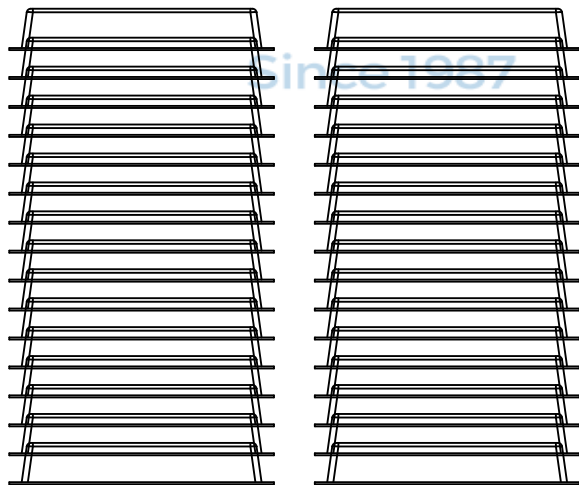

3000PCS/30盘/2捆/箱



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO:0386-2

深圳市步步精科技有限公司

.X: ±0.38 X': ±3'
.XX: ±0.25 X'': ±2'
.XXX: ±0.13 .XX': ±1'

APPD JM_Zheng
CHKD Tang

DR LYX

NAME:
DC座 DC550200 2.0针全铜 三脚插 7A 盒装

PJ NO: 116-309-030005-P1G
SIZE:A4 | DRW NO:

FINISH:SEE NOTES | MAT'L:SEE NOTES
SCALE:N/A | REV:A0 | UNIT:mm | PAGE:2/2