




REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	

SPECIFICATION:





1. RATING: DC 30V 12A
2. CONTACT RESISTANCE:
30mΩ MAX (INITIAL).
50mΩ MAX (FINAL).
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES



Ø6.00
PICK UP

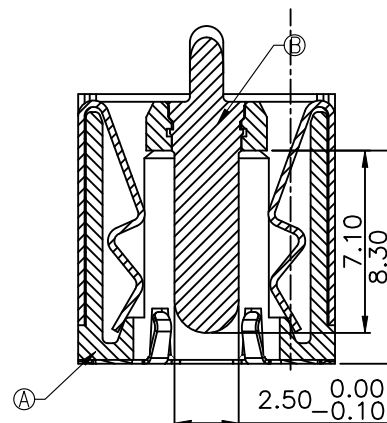


SECTION A-A

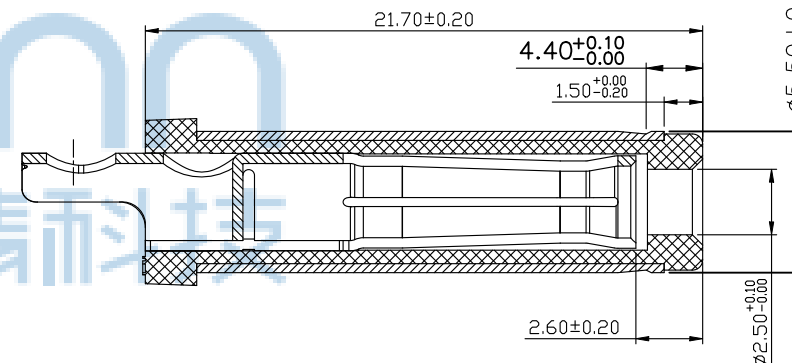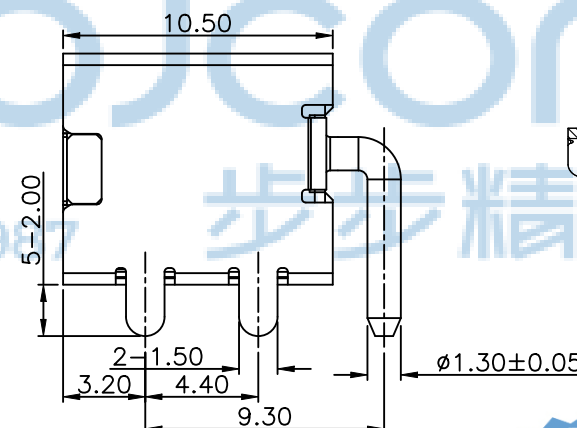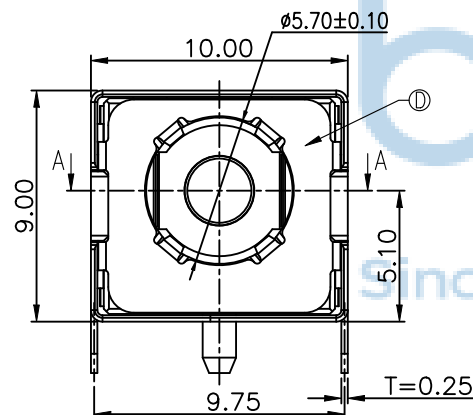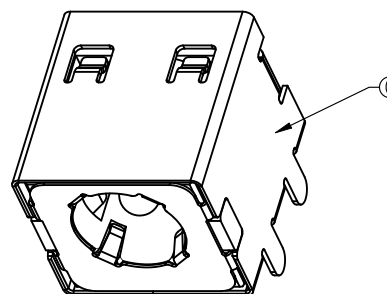

MATING PLUG


DP550250-0188-60000H

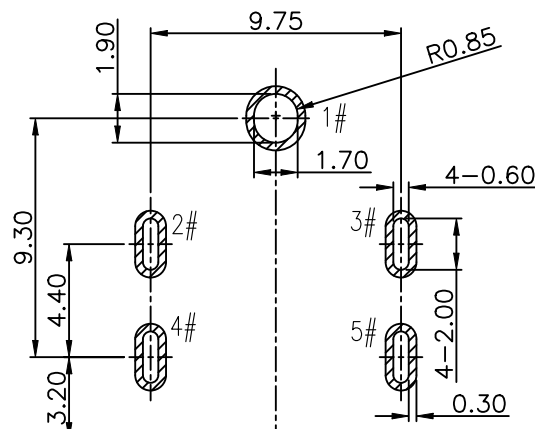

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE: ±0.05

PRODUCT EDGE

SCHEMATIC




NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
D	GROUND	SUS 304		1
C	SHELL	C5210	Ni 40u" MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH /Ni 40u" MIN.	1
A	HOUSING	PA10T	BLACK	1

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG. NO: 0386-2

.X: ±0.38 .X': ±3" .XX: ±0.25 .X'': ±2" .XXX: ±0.13 .X''': ±1"		NAME: DC座 DC550250-0991-20000H 2.5针 全铜 四脚插 DC30V 12A
APPD. JM_Zheng 23/05'02	CHKD. LYX 23/05'02	P.J. NO.: 116-302-040008-P1G SIZE: A4 DRW NO.:
DR. LHC 23/05'02		FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

深圳市步步精科技有限公司

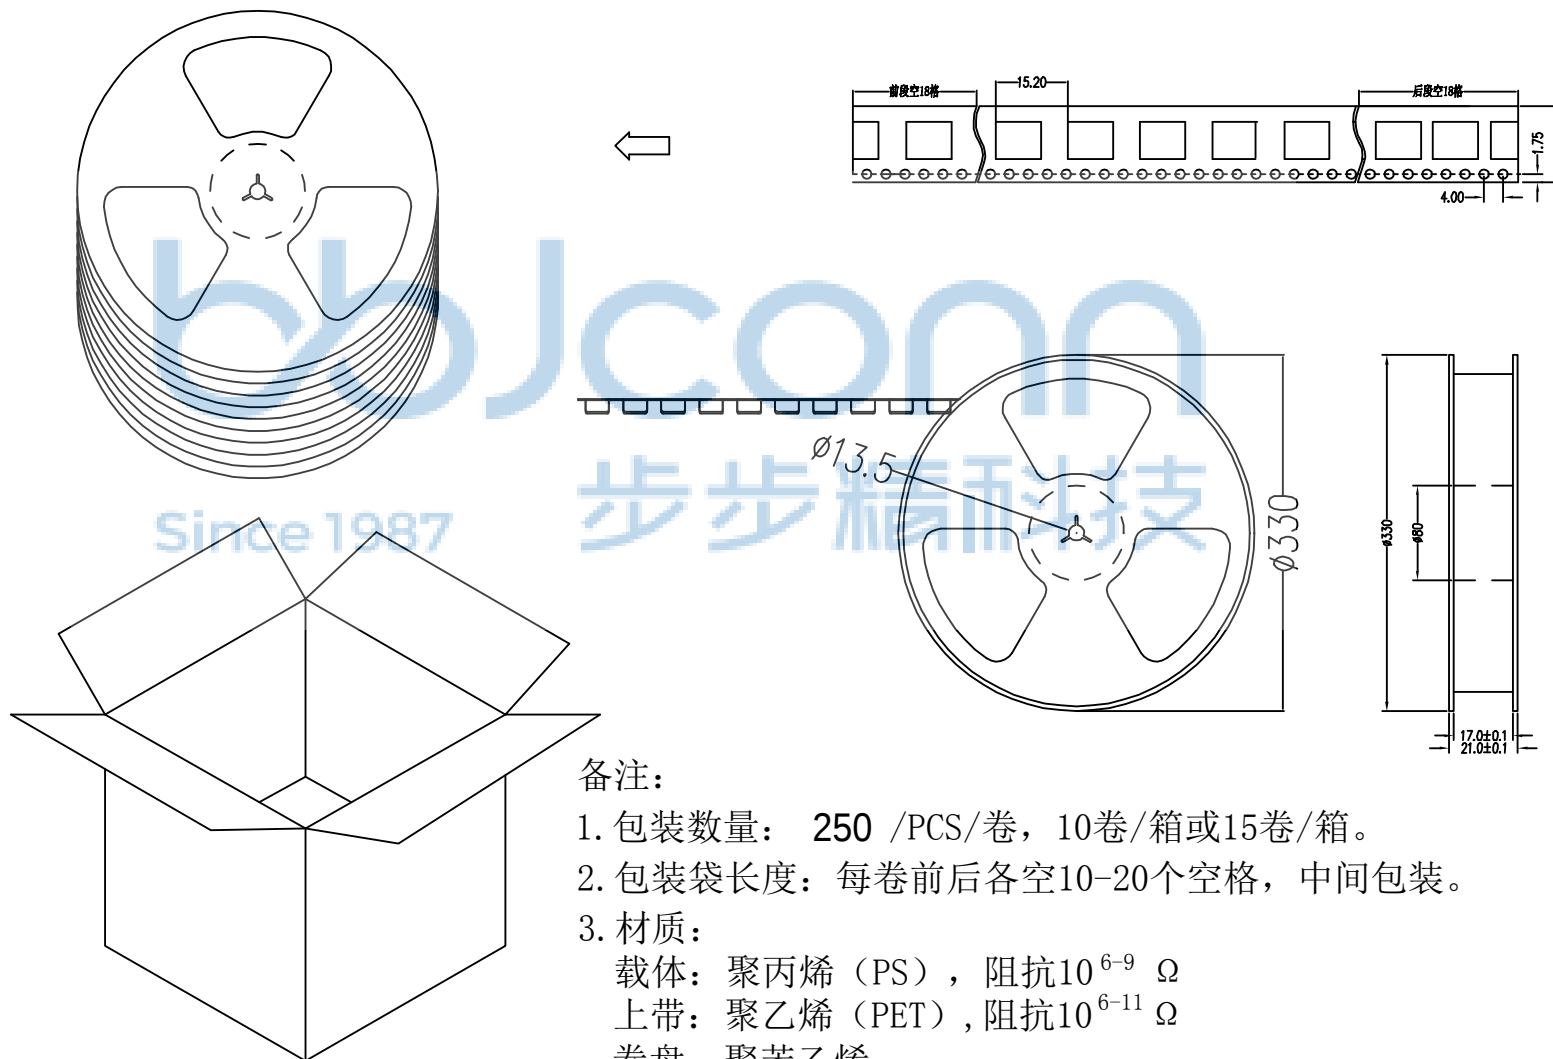

备注:

1. 包装数量: 250 /PCS/卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
APPD.	JM_Zheng	23/05'02	NAME: DC座 DC550250-0991-20000H 2.5针 全铜 四脚插 DC30V 12A
CHKD.	LYX	23/05'02	PJ. NO.116-302-040008-P1G SIZE: A4 DRW NO.:
DR.	LHC	23/05'02	FINISH: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm
PDWG.NO: 0386-2			MAT'L.: SEE NOTES PAGE: 2/2