

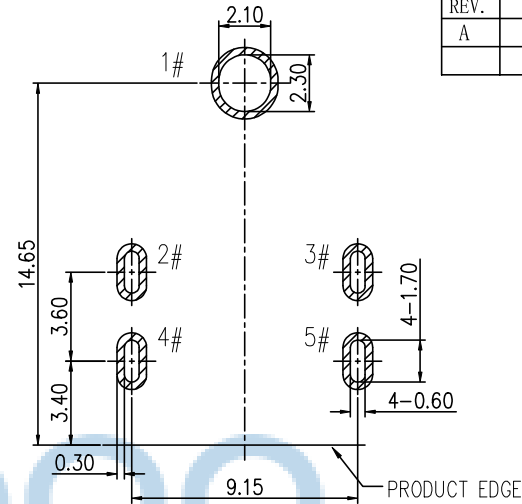
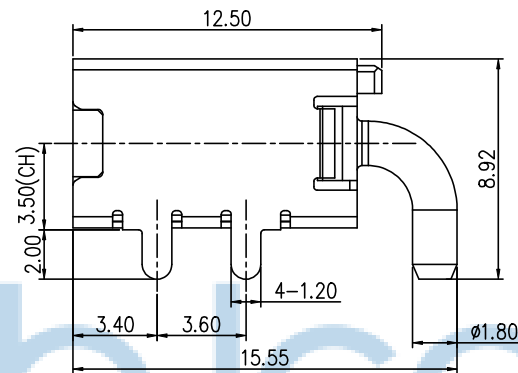
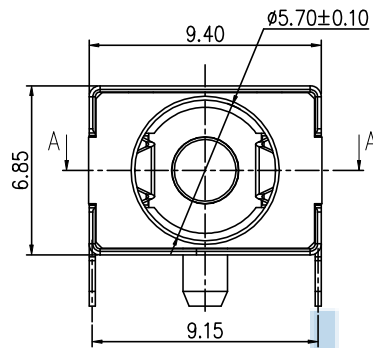



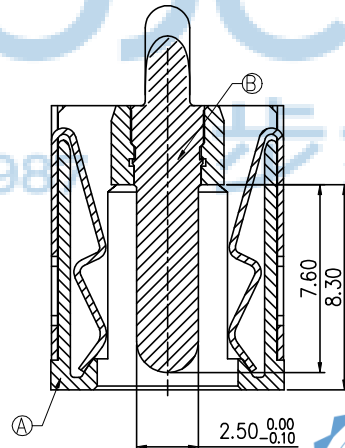


REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

SPECIFICATION:


1. RATING: DC 30V 20A
2. CONTACT RESISTANCE:
30mΩ MAX(INITIAL).
50mΩ MAX(FINAL).
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES

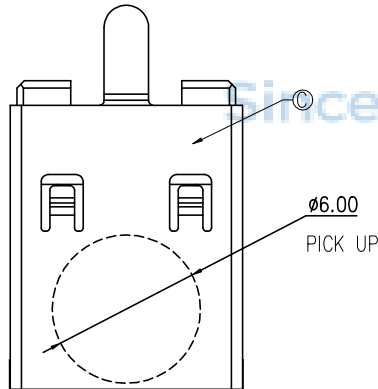

SCHEMATIC



C	SHELL	C5210	Ni 40u" MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH /Ni 40u" MIN.	1
A	HOUSING	PA10T	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

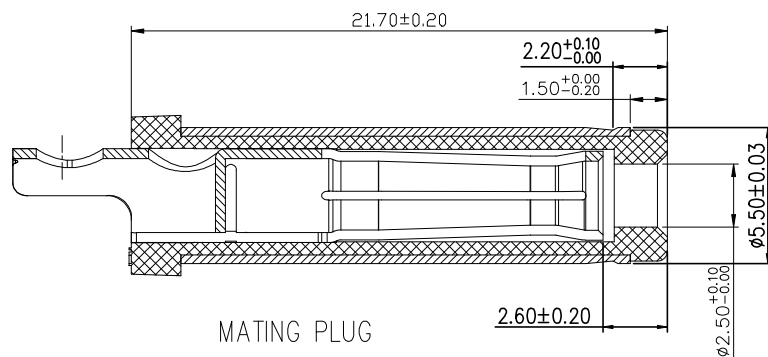

MATING PLUG



TOLERANCE UNSPECIFIED

.0	±0.35
.00	±0.25
.000	±0.15
X. °	±2.00°

CUSTOMER DRAWING


深圳市步步精科技有限公司

TITLE:

DC座 DC550250-1195-20000H 2.5针 全铜 四脚插 DC30V 20A

DRAWN/ DATE	设计 LHC	SIZE:A4	UNIT:MM.	PART. NO:	116-302-040009-P1G
CHECKED/ DATE	审核 LYX	SCALE: 1:1	PROJECTION	REV.:	版本
APPROVED/ DATE	核准 LJP	DWG. PATH	0386-2	SHEET:	页码

REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

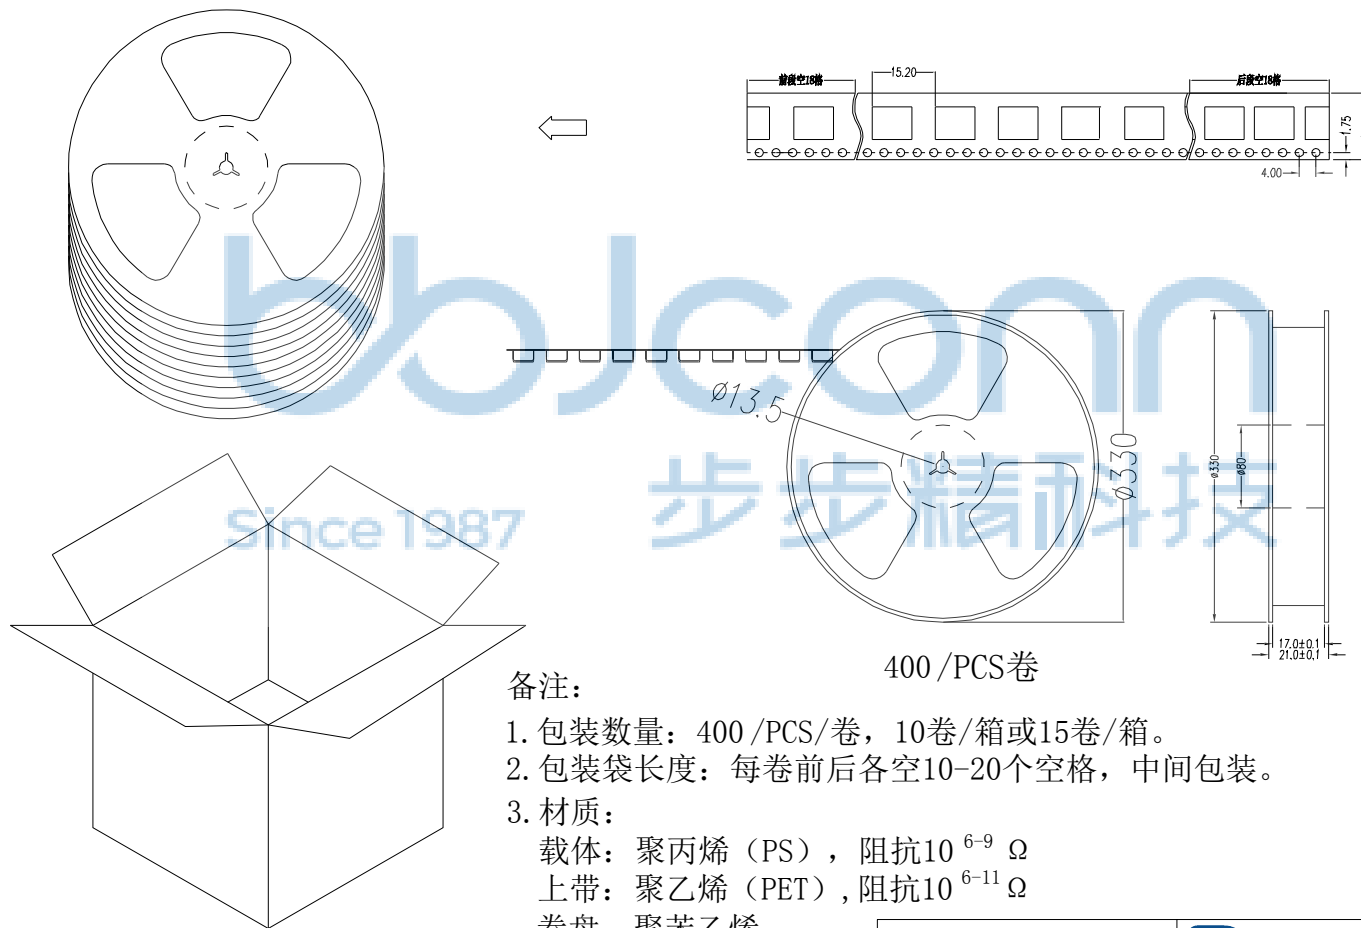

备注:

1. 包装数量: 400 /PCS/卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM
纸箱规格: 345*345*35MM

TOLERANCE UNSPECIFIED		 深圳市步步精科技有限公司		
.0	±0.35			
.00	±0.25			
.000	±0.15			
X. *	±2.00*			
CUSTOMER DRAWING		TITLE: DC座 DC550250-1195-20000H 2.5针 全铜 四脚插 DC30V 20A		
DRAWN/ DATE	设计 LHC	SIZE:A4	UNIT:MM.	PART. NO: 116-302-040009-P1G
CHECKED/ DATE	审核 LYX	SCALE: 1:1	PROJECTION	REV.: 版本
APPROVED/ DATE	核准 LJP	DWG. PATH	0386-2	SHEET: 页码

