

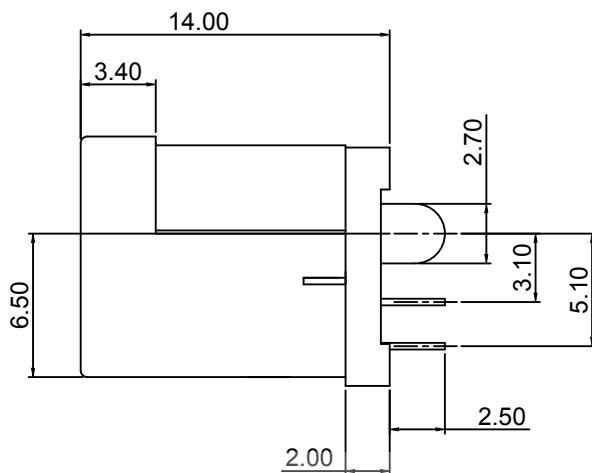
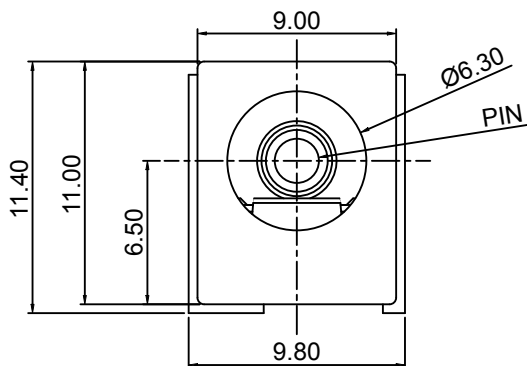


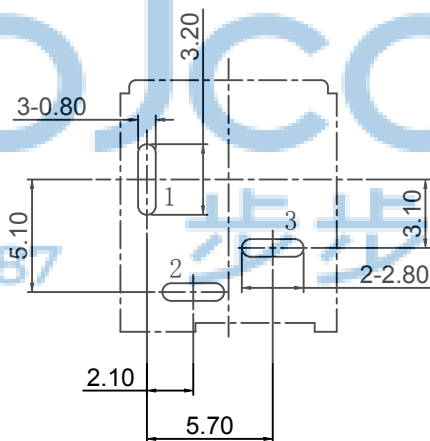


规格:

1. 额定值: DC30V 0.5A
2. 接触电阻: $\leq 30\text{m}\Omega$
3. 绝缘电阻: $\geq 100\text{M}\Omega$
4. 耐电压: 500VAC
5. 插拔力: 3N~30N
6. 使用寿命: 5000次
7. 使用温度: $-20^{\circ}\text{C} \sim +80^{\circ}\text{C}$


PIN	Ø2.0	Ø2.5
-----	------	------

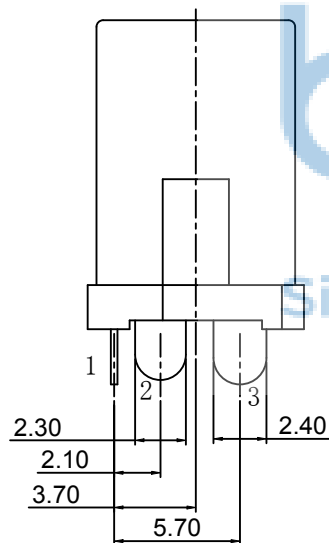

P.C.B 设计参考尺寸



电路示意图



推荐插头尺寸



6	后盖	PA66	1	黑色
5	主体	PA66	1	黑色
4	平片	黄铜 T=0.3mm	1	镀铜锡
3	弯片	黄铜 T=0.3mm	1	镀铜锡
2	弹片	磷铜 T=0.3mm	1	镀铜锡
1	PIN针	黄铜	1	镀铜锡
序号	名称	材料	数量	颜色/电镀

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0050-2



深圳市步步精科技有限公司

.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13
X*: $\pm 3^{\circ}$.X*: $\pm 2^{\circ}$.XX*: $\pm 1^{\circ}$

NAME:
DC插座 DC-012A 2.5针 全铜 短脚 180度 三脚插

APPD. JM_Zheng

PJ. NO.: 116-205-030002-Y2G

CHKD. TSP


SIZE: A4 DRW NO.:

DR. LYX


FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

PE袋规格: 260*185

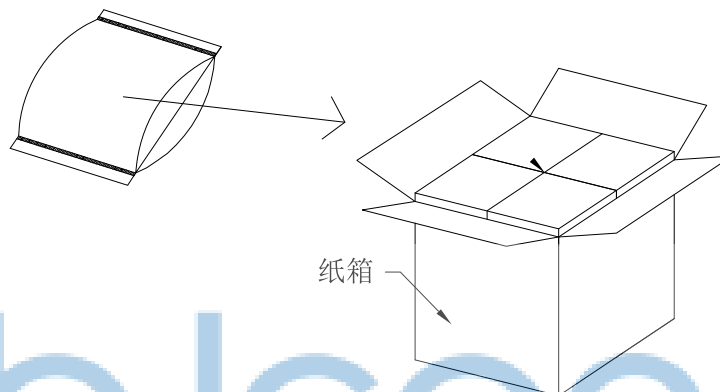

成品标签



1. 包装要求:

- 1.1 每个PE袋包装500PCS;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计10000PCS;
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"		NAME: DC插座 DC-012A 2.5针 全铜 短脚 180度 三脚插			
APPD. JM_Zheng		CHKD. TSP		PJ. NO.: 116-205-030002-Y2G			
PDWG.NO: 0050-2		DR. LYX		SIZE: A4 DRW NO.:			
				FINISH: SEE NOTES MAT'L.: SEE NOTES			
				SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2			