

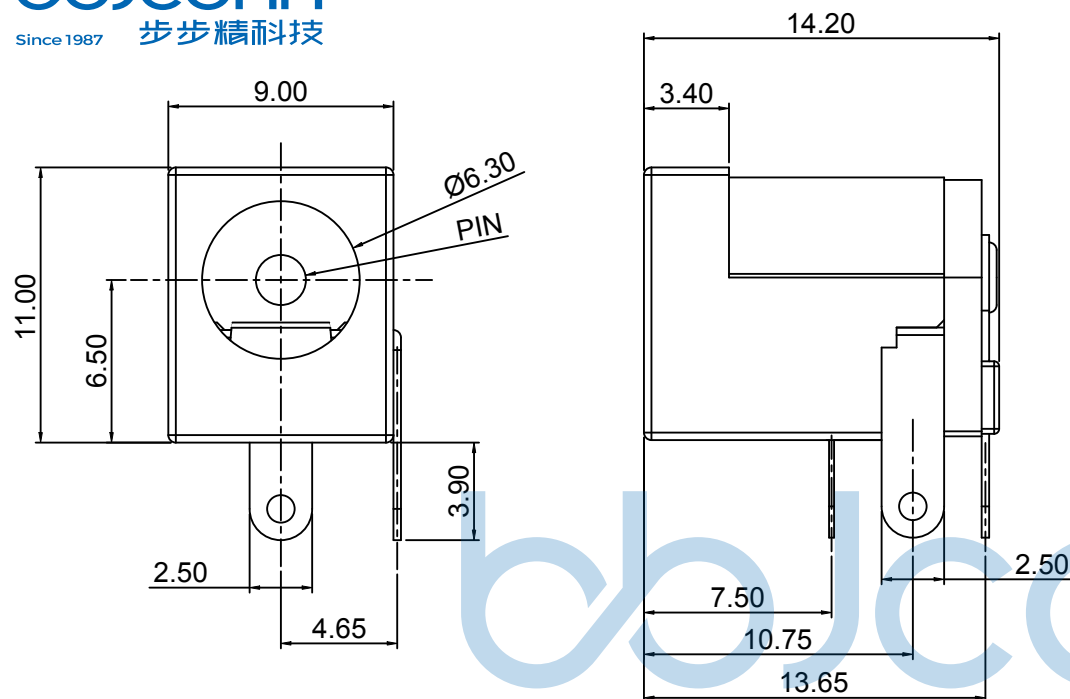



推荐插头尺寸



电路示意图

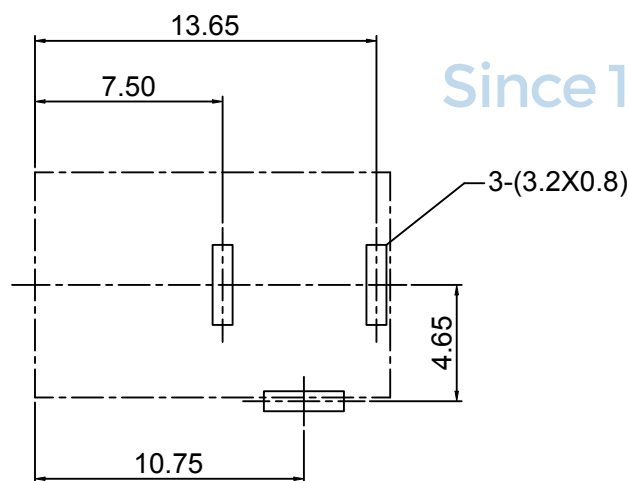

P.C.B 设计参考尺寸

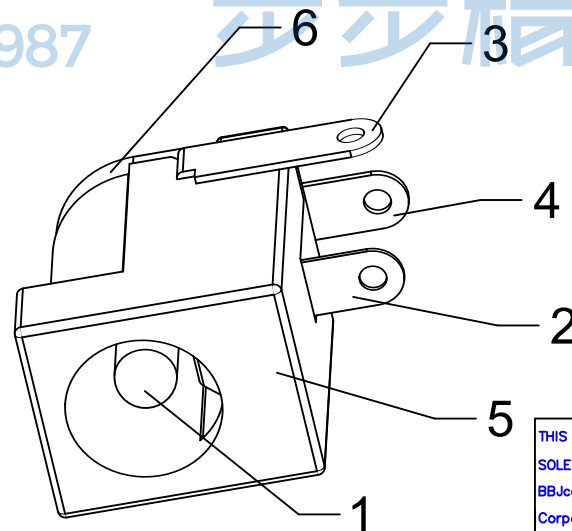

- 规格:**
1. 额定值: DC30V 5A
 2. 接触电阻: $\leq 30\text{m}\Omega$
 3. 绝缘电阻: $\geq 100\text{M}\Omega$
 4. 耐电压: 500VAC
 5. 插拔力: 3N~30N
 6. 使用寿命: 5000次
 7. 使用温度: $-20^{\circ}\text{C} \sim +80^{\circ}\text{C}$

PIN
2.0
2.5



6	后盖	PBT UL94V-0	1	黑色
5	主体	PBT UL94V-0	1	黑色
4	平片	黄铜 T=0.3mm	1	镀铜锡
3	弯片	黄铜 T=0.3mm	1	镀铜锡
2	弹片	磷铜 T=0.3mm	1	镀铜锡
1	PIN针	黄铜	1	镀铜锡
序号	名称	材料	数量	颜色/电镀

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd
Corporation AND SHOULD
NOT BE USED IN ANY



深圳市步步精科技有限公司

.X: ± 0.38	X*: $\pm 3^*$
.XX: ± 0.25	.X*: $\pm 2^*$
.XXX: ± 0.13	.XX*: $\pm 1^*$

NAME: DC-005 2.5针 全铜 防火 大电流5A 30V

APPD.	JM_Zheng
-------	----------

	PJ. NO.: 116-309-010001-Y2G
---	-----------------------------

N.	CHKD.	LYX
----	-------	-----


SIZE: A4	DRW NO.:
FINISH: SEE NOTES	MAT'L: SEE NOTES

DR.	TSP
-----	-----


SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 1/
------------	----------	----------	----------

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

PE袋规格: 260*185

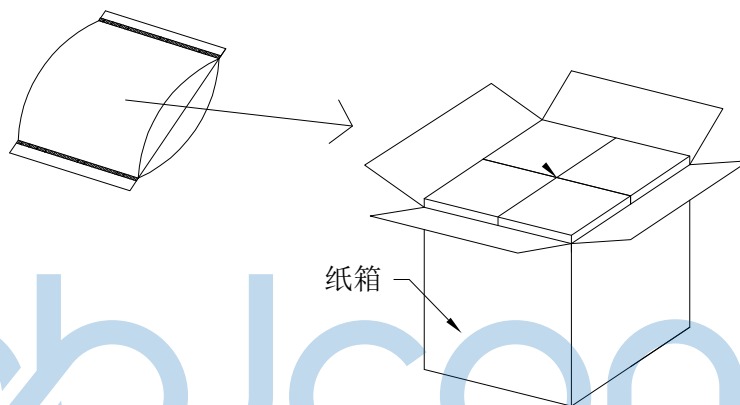

成品标签



1. 包装要求:

- 1.1 每个PE袋包装500pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计10000pcs;
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0050-2		NAME: DC-005 2.5针 全铜 防火 大电流5A 30V	
APPD.	JM_Zheng	PJ. NO.: 116-309-010001-Y2G	
CHKD.	LYX	SIZE: A4 DRW NO.:	
DR.	TSP	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2