



REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

规格:

1. 额定值: DC30V 1.0A
2. 接触电阻: $\leq 30\text{m}\Omega$
3. 绝缘电阻: $\geq 100\text{M}\Omega$
4. 耐电压: 500VAC
5. 插拔力: 8N~25N
6. 使用寿命: 3000次
7. 使用温度: $-20^{\circ}\text{C} \sim +80^{\circ}\text{C}$



电路示意图



推荐插头尺寸




5	后盖	PA66 UL94V-0	1	黄色
4	主体	PA66 UL94V-0	1	黑色
3	平片	C2680 T=0.3mm	1	镀银
2	弹片	C5191 T=0.3mm	1	镀银
1	PIN针	黄铜H65	1	镀锡
序号	名称	材料	数量	颜色/电镀


THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		NAME: DC插座 DC-008 1.65针 全铜 180度 两脚DIP 袋装	
.X: $\pm 3^{\circ}$.X': $\pm 2^{\circ}$.XX': $\pm 1^{\circ}$		PJ. NO.: 116-309-020002-Y2G	
APPD. JM_Zheng		SIZE: A4 DRW NO.:	
CHKD. LYX		FINISH: SEE NOTES	
PDWG.NO: 0050-2		MAT'L: SEE NOTES	
DR. SGF		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	



PE袋规格: 260*185

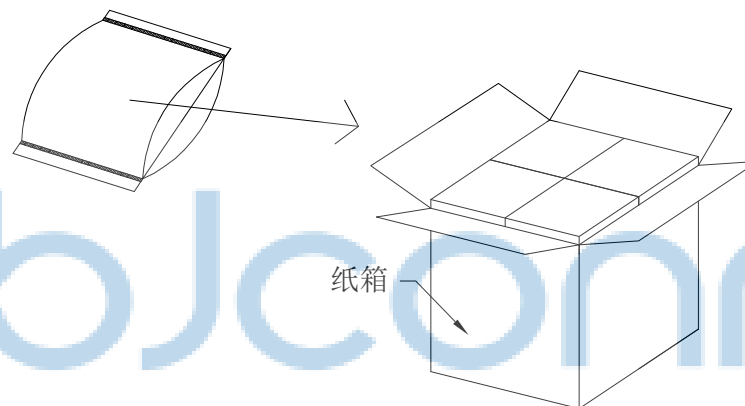

成品标签



1. 包装要求:

- 1.1 每个PE袋包装1000pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计20000pcs;
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0050-2

深圳市步步精科技有限公司

.X: ± 0.38 X': $\pm 3'$
.XX: ± 0.25 .X': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

NAME:
DC插座 DC-008 1.65针 全铜 180度 两脚DIP 袋装

APPD. JM_Zheng

PJ. NO.: 116-309-020002-Y2G

CHKD. LYX

SIZE: A4 DRW NO.:

DR. SGF

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2