




REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release		LYX

规格:

1. 额定值: DC30V 1.0A
2. 接触电阻: $\leq 30\text{m}\Omega$
3. 绝缘电阻: $\geq 100\text{M}\Omega$
4. 耐电压: 500VAC
5. 插拔力: 8N~25N
6. 使用寿命: 3000次
7. 使用温度: $-20^{\circ}\text{C} \sim +80^{\circ}\text{C}$




5	后盖	PA66 UL94V-0	1	黄色
4	主体	PA66 UL94V-0	1	黑色
3	平片	C2680 T=0.3mm	1	镀银
2	弹片	C5191 T=0.3mm	1	镀银
1	PIN针	黄铜H65	1	镀锡
序号	名称	材料	数量	颜色/电镀

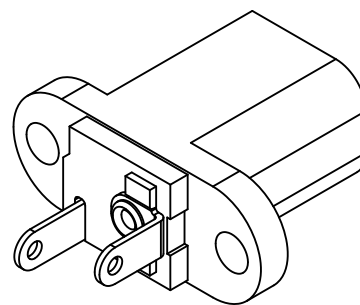


推荐插头尺寸

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0050-2		NAME: DC座 DC 008A 1.30针 两脚插 全铜	
APPD.	JM_Zheng	PJ. NO.:	116-309-020003-Y2G
CHKD.	TSP	SIZE: A4	DRW NO.:
DR.	LYX	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/1

PE袋规格: 260*185

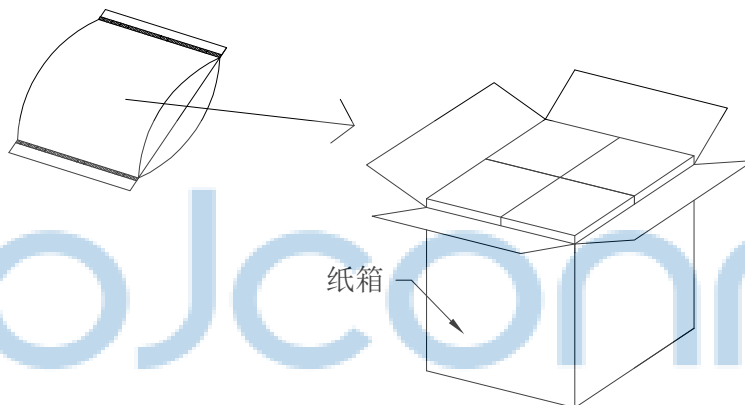

成品标签



1. 包装要求:

- 1.1 每个PE袋包装1000pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计20000pcs;
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG,NO: 0050-2

深圳市步步精科技有限公司		NAME: DC座 DC 008A 1.30针 两脚插 全铜	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3" .X*: ±2" .XX*: ±1"	PJ. NO.: 116-309-020003-Y2G	SIZE: A4
APPD. JM_Zheng	CHKD. LYX	FINISH: SEE NOTES	MAT'L.: SEE NOTES
DR. SGF	SCALE: N/A	REV.: A0	UNIT: mm
		PAGE: 2/2	