




推荐插头尺寸

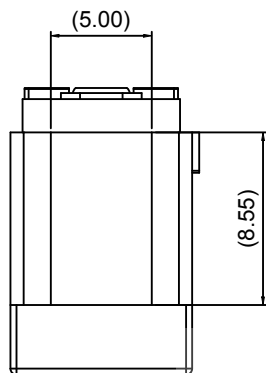

P.C.B 设计参考尺寸

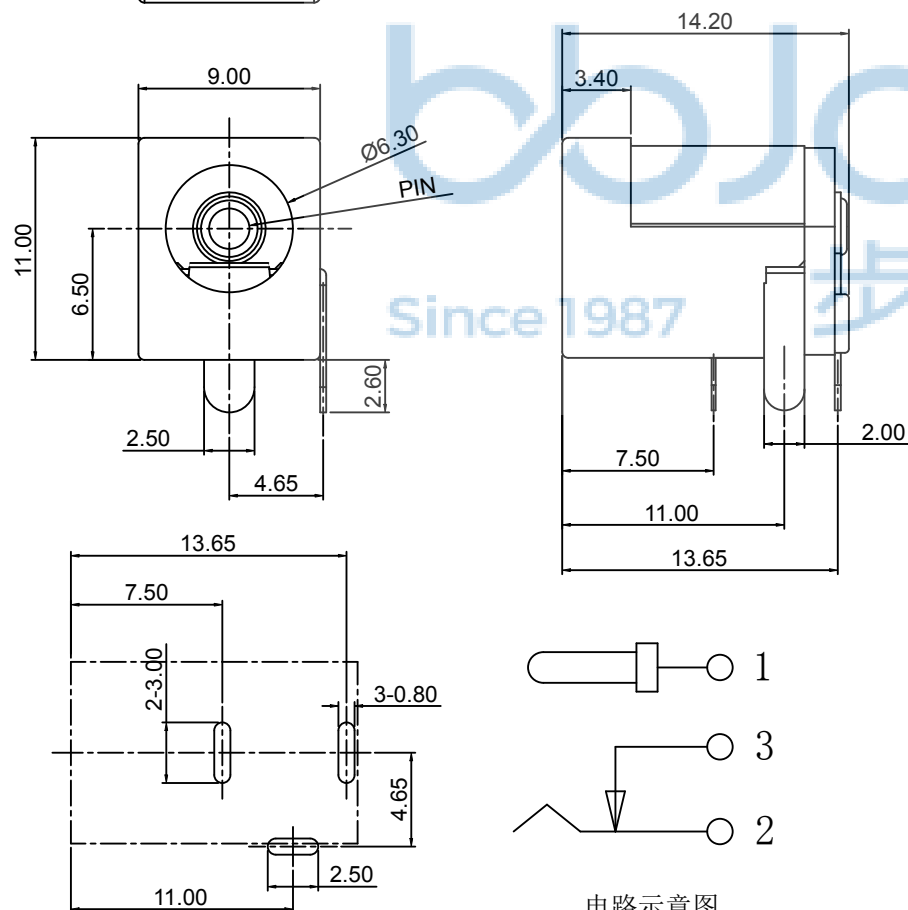

电路示意图

规格:

1. 额定值：DC30V 5A
2. 接触电阻： $\leq 30\text{m}\Omega$
3. 绝缘电阻： $\geq 100\text{M}\Omega$
4. 耐电压：500VAC
5. 插拔力：3N $\sim$ 30N
6. 使用寿命：5000次
7. 使用温度： $-20^{\circ}\text{C}\sim+80^{\circ}\text{C}$

PIN	
2.0	2.5



6	后盖	PA9T	1	黑色
5	主体	PA9T	1	黑色
4	平片	黄铜 T=0.3mm	1	镀铜锡
3	弯片	黄铜 T=0.3mm	1	镀铜锡
2	弹片	磷铜 T=0.3mm	1	镀铜锡
1	PIN针	黄铜	1	镀铜锡
序号	名称	材料	数量	颜色/电镀

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG,NO: 0050-2

深圳市步步精科技有限公司

.X: ± 0.38	X*: $\pm 3^*$
.XX: ± 0.25	.X*: $\pm 2^*$
.XXX: ± 0.13	.XX*: $\pm 1^*$

NAME:	DC插座 DC-005 2.0针 全铜 短脚 三脚插 PA9T 防火 通孔, 大电流5A
-------	---

APPD.	JM_Zheng
-------	----------





	PJ. NO.: 116-309-030003-Y2G
---	-----------------------------

CHKD.	LYX
-------	-----

	SIZE: A4	DRW NO.:
	FINISH: SEE NOTES	MAT'L: SEE NOTES

DR.

FINISH: SEE NOTES	MATERIAL: SEE NOTES
SCALE: N/A	REV: A0 UNIT: mm PAGE: 1/2

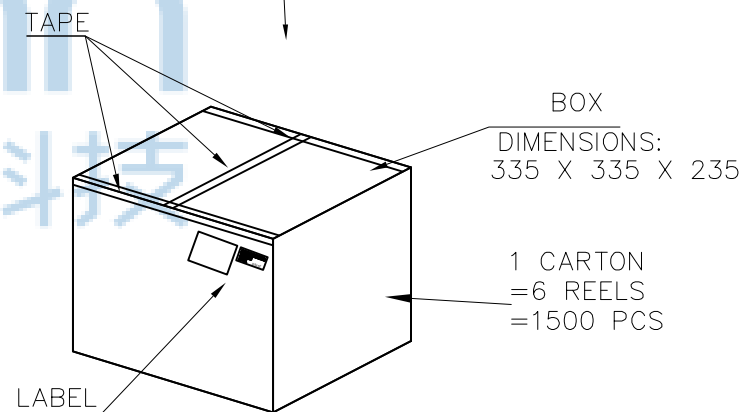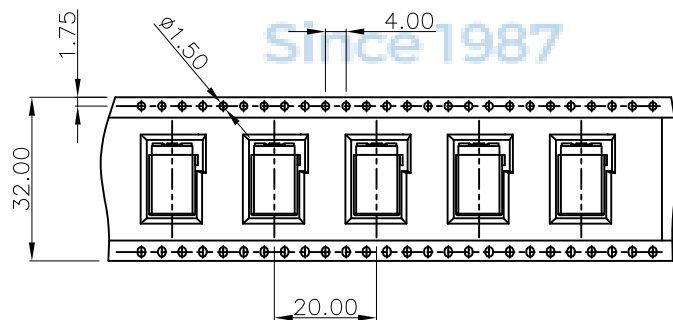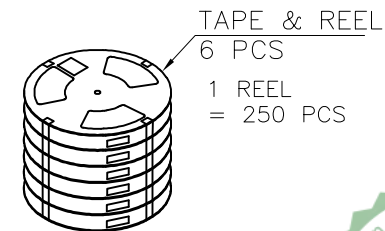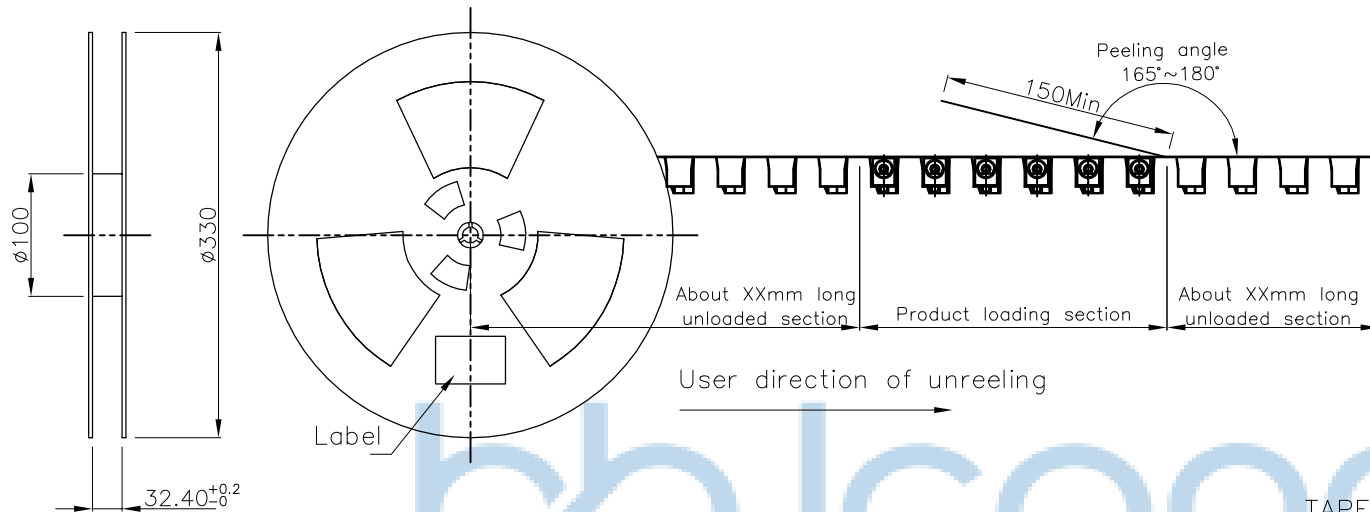

NOTE:

1. PEELING SPEED: 300mm/MINUTE
2. PEELING RESISTANCE: 20g~130g
3. PEELING ANGLE: $165^{\circ} \sim 180^{\circ}$



250	6	1500	--KG	--KG
PCS/盘	盘/箱	PCS/箱	毛重	净重

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.					深圳市步步精科技有限公司				
APPD. JM_Zheng		NAME: DC插座 DC-005 2.0针 全铜 短脚 三脚插 PA9T 防火 通孔 大电流5A		PJ. NO.: 116-309-030003-Y2G		SIZE: A4		DRW NO.:	
CHKD. LYX		FINISH: SEE NOTES		MAT'L.: SEE NOTES		SCALE: N/A		REV.: A0	
PDWG.NO: 0050-2		DR. TSP		UNIT: mm		PAGE: 2/2			