

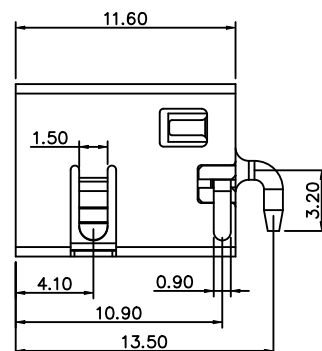
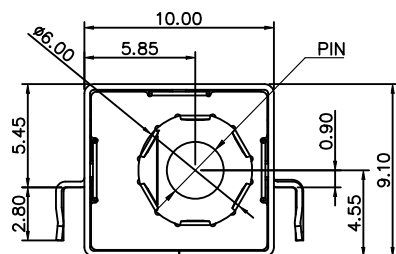


RECOMMENDED PLUG

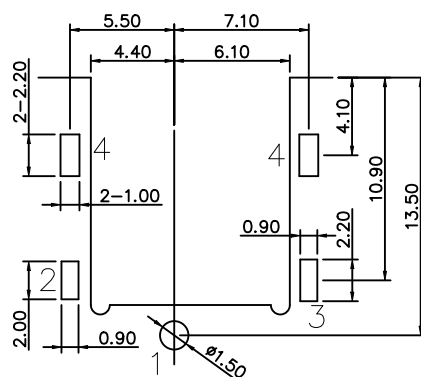

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE±0.05mm



REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

Specification:





1. Rating : DC 20V 10A;
2. Contact resistance: $\leq 30m\Omega$;
After test: $\leq 50m\Omega$
3. Insulation resistance: $\geq 100M\Omega$ (500VDC);
After test: $\geq 50M\Omega$
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3N~30N;
6. life test: 3000cycles min;
7. Operation temperature range: -25°C~75°C

PIN	$\phi 2.0$	$\phi 2.5$
APPD.		



NO.	DESCRIPTION	QTY	MATERIAL	REMARK
⑥	SHIELDING 2	1	SUS t0.1	
⑤	SHIELDING 1	1	H65 t0.3	Ni
④	PIN	1	H59	Ag/Ni
③	TERMINAL	1	H65 t0.4	Ag
②	SPRING	1	C5191 t0.3	Ag
①	Housing	1	LCP	BLACK

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0050-2		深圳市步步精科技有限公司			
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3 .X*: ±2 .XX*: ±1*	
	NAME:		DC插座 DC-090 2.5针 沉板3.55 全铜 四脚插 针镀镍 编带		
	APPD.	JM_Zheng		PJ. NO.: 116-309-040004-Y2G	
	CHKD.	LYX		SIZE: A4 DRW NO.:	
		FINISH: SEE NOTES		MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0		UNIT: mm	PAGE: 1/2

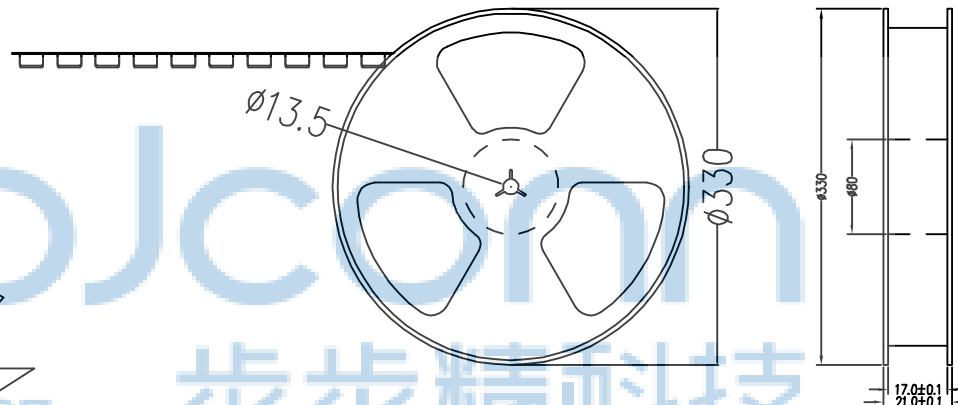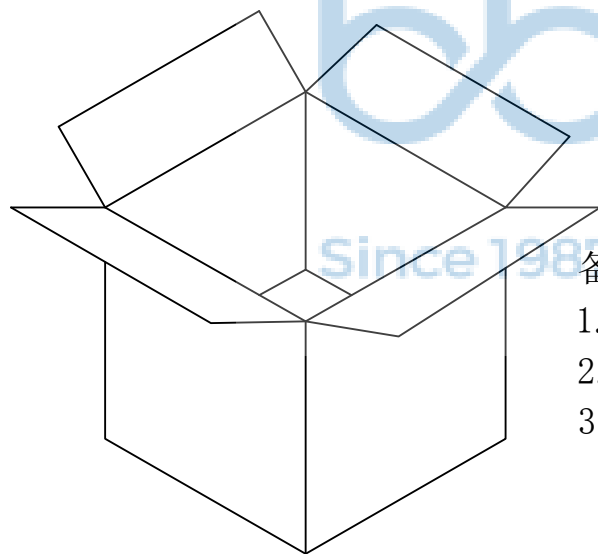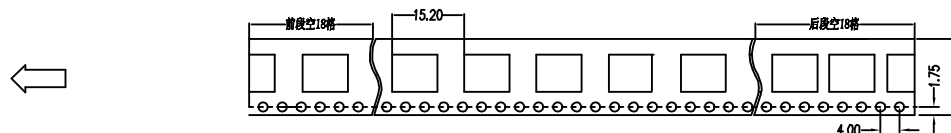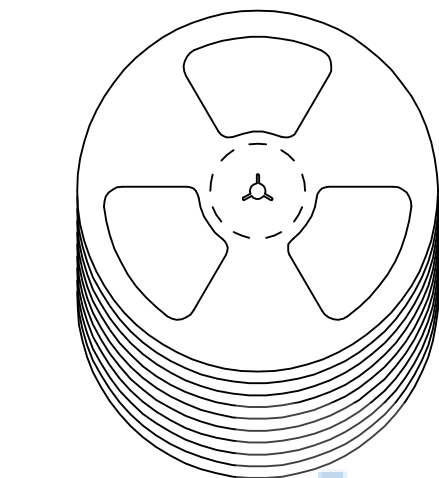

备注:

1. 包装数量: 500 /PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38	X": ±3"	NAME:	
.XX: ±0.25	.X": ±2"	DC插座 DC-090 2.5针 沉板3.55 全铜 四脚插 针镀镍 编带	
.XXX: ±0.13	.XX": ±1"		
APPD.	JM_Zheng	PJ. NO.: 116-309-040004-Y2G	
CHKD.	LYX	SIZE: A4 DRW NO.:	
PDWG.NO: 0050-2	DR. LHC	FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	