




REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP



规格:

1. 额定值: DC30V 0.5A
2. 接触电阻: $\leq 30\text{m}\Omega$
3. 绝缘电阻: $\geq 100\text{M}\Omega$
4. 耐电压: 500VAC
5. 插拔力: 3N~30N
6. 使用寿命: 5000次
7. 使用温度: $-20^{\circ}\text{C} \sim +80^{\circ}\text{C}$


PIN	
2.0	2.5

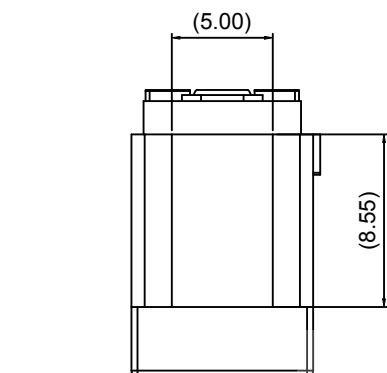

推荐插头尺寸

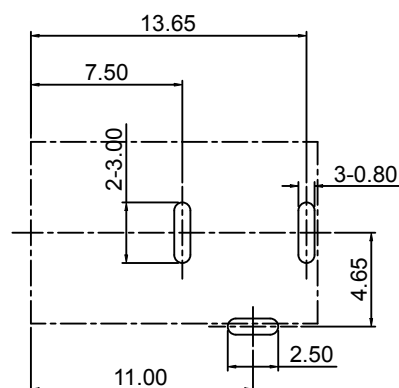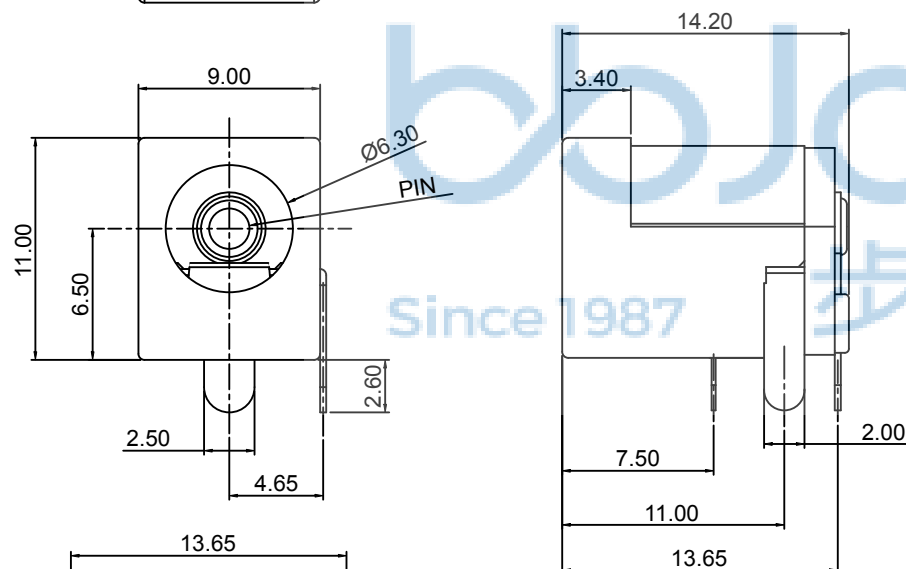

P.C.B 设计参考尺寸



电路示意图





6	后盖	PA9T	1	黑色
5	主体	PA9T	1	黑色
4	平片	黄铜 T=0.3mm	1	镀铜锡
3	弯片	黄铜 T=0.3mm	1	镀铜锡
2	弹片	磷铜 T=0.3mm	1	镀铜锡
1	PIN针	黄铜	1	镀铜锡
序号	名称	材料	数量	颜色/电镀

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0050-2

深圳市步步精科技有限公司

NAME: DC插座 DC-005 2.5针 全铜 短脚 三脚插 PA9T 防火 通孔 编带	
APPD. JM_Zheng	PJ. NO.: 116-302-030006-Y2G
CHKD. LYX	SIZE: A4 DRW NO.:
DR. TSP	FINISH: SEE NOTES MAT'L.: SEE NOTES
	SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

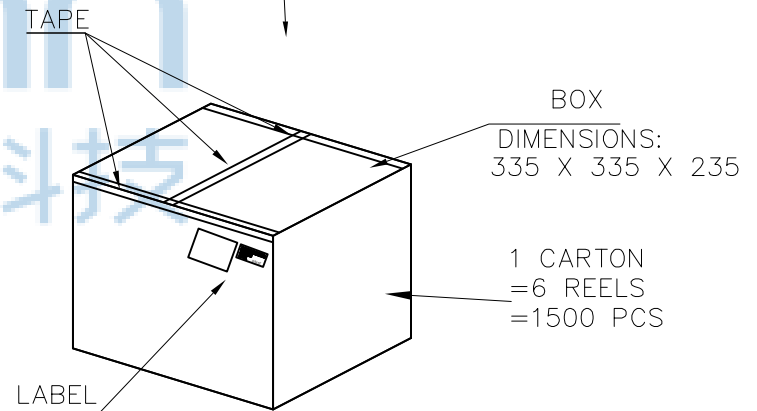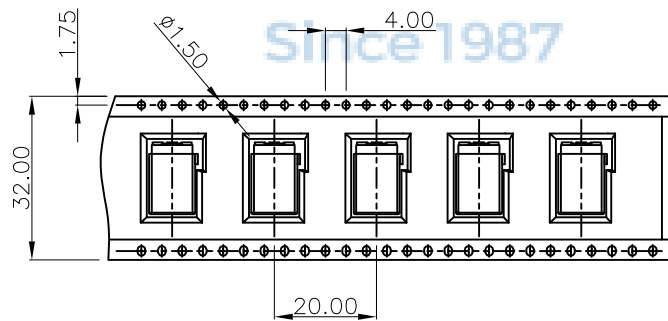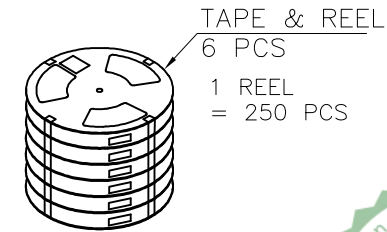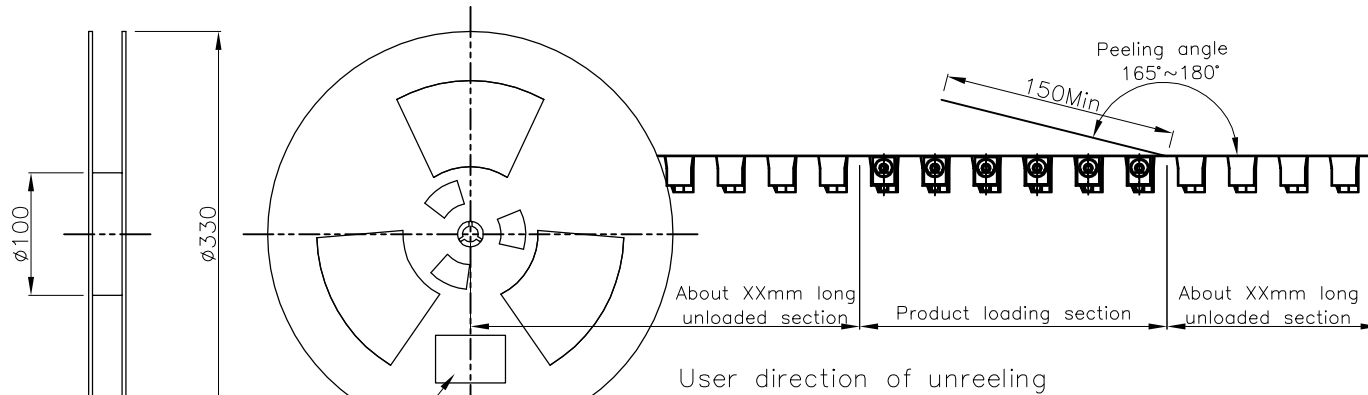

NOTE:

1. PEELING SPEED: 300mm/MINUTE
2. PEELING RESISTANCE: 20g~130g
3. PEELING ANGLE: $165^{\circ} \sim 180^{\circ}$



250	6	1500	--KG	--KG
PCS/盘	盘/箱	PCS/箱	毛重	净重

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ± 0.38 .X': $\pm 3^{\circ}$.XX: ± 0.25 .X': $\pm 2^{\circ}$.XXX: ± 0.13 .X': $\pm 1^{\circ}$		NAME: DC插座 DC-005 2.5针 全铜 短脚 三脚插 PA9T 防火 通孔 编带 APPD. JM_Zheng CHKD. LYX DR. TSP		PJ. NO.: 116-302-030006-Y2G SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	
PDWG.NO: 0050-2							