
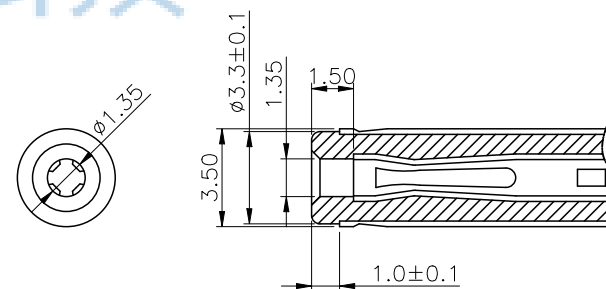


REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF




SPECIFICATIONS:
1. ELECTRICAL CHARACTERISTICS:
1-1. RATING: 3A
1-2. CONTACT RESISTANCE: 30mΩ MAX.(INITIAL)
1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
1-4. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500V DC
2. MECHANICAL CHARACTERISTICS:
2-1. INSERTION FORCE : 0.3~3.0 KGF
2-2. WITHDRAWAL FORCE : 0.3~3.0 KGF
3. LIFE TEST: 5,000 CYCLES MIN.
4. FOR REFLOW SOLDERING LEAD-FREE PROCESS.

#1 PIN(+)
#2 TIP SPRING(-)

ELECTRICAL CIRCUIT

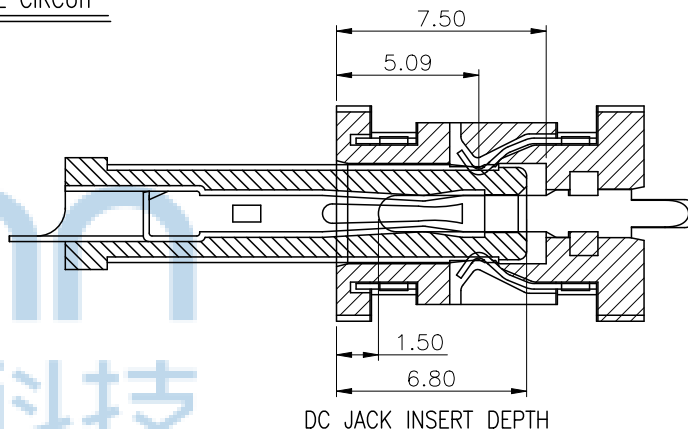

MATE PLUG

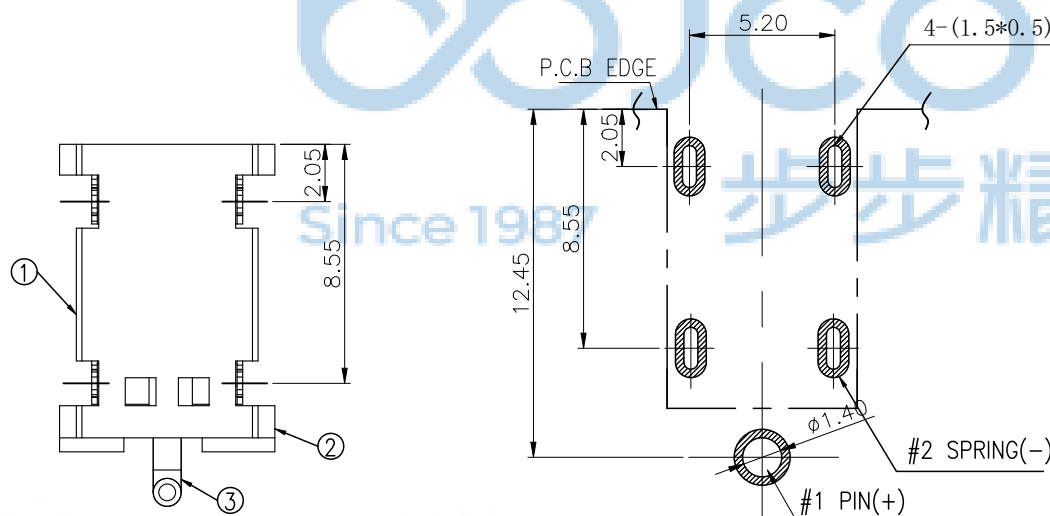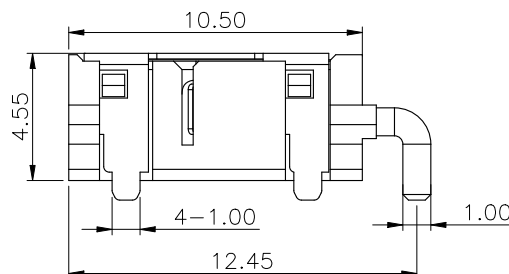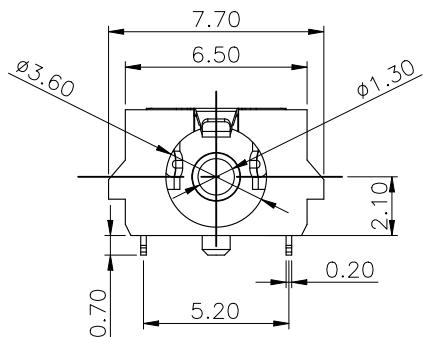

RECOMMENDED PCB LAYOUT TOP VIEW (TOLERANCE:±0.05)



ITEM	NAME	Q'TY	DESCRIPTION	NOTE
3	SHELL	1	PHORPHOS BRONZE; THE BOTTOM OF THE NICKEL(40u"MIN.); THE WHOLE GOLD FLASH PLATING.	
2	CONCTOR PIN	1	BRASS; THE BOTTOM OF THE NICKEL(40u"MIN.); THE WHOLE GOLD FLASH PLATING.	
1	HOUSING	1	PA9T COLOR BLACK	

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO:0050-2




深圳市步步精科技有限公司

.X: ±0.38 X': ±3'
.XX: ±0.25 X'': ±2'
.XXX: ±0.13 .XX': ±1'

APPD JM_Zheng
CHKD LYX
DR SGF


NAME: DC插座 DC-0045T-BS 1.3针 L=10.50
全铜 板上四脚插 编带

PJ NO: 116-302-040001-Y2G
SIZE:A4 DRW NO:
FINISH:SEE NOTES MAT'L:SEE NOTES
SCALE:N/A REV:A0 UNIT:mm PAGE:1/2

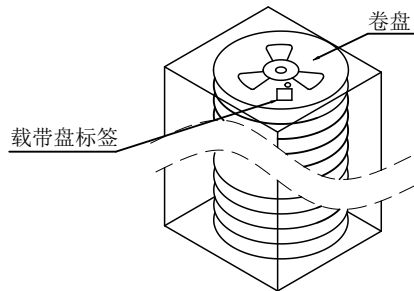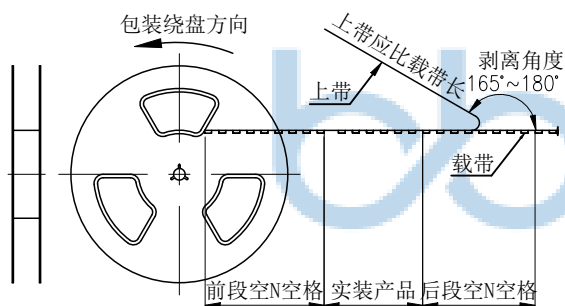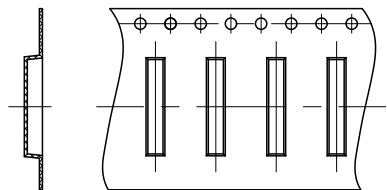

备注:

- 1、包装数量: 1000/PCS/卷, 10卷/箱。
- 2、包装袋长度: 每卷前后各空10-20个空格, 中间包装。
- 3、材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

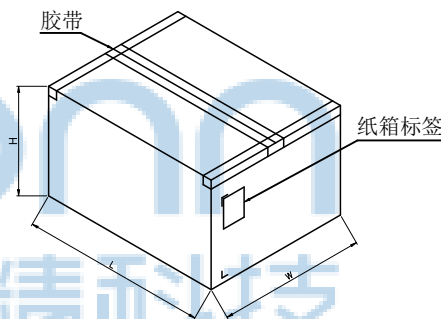

纸箱规格: W345*L345*H230MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
		.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13	X': $\pm 3'$.X': $\pm 2'$.XX': $\pm 1'$
APPD	JM_Zheng	NAME: DC插座 DC-0045T-BS 1.3针 L=10.50 全铜 板上四脚插 编带	
CHKD	LYX	PJ NO: 116-302-040001-Y2G SIZE:A4 DRW NO:	
PDWG NO:0050-2		FINISH:SEE NOTES	MAT'L:SEE NOTES
DR	SGF	SCALE:N/A	REV:A0
		UNIT:mm	PAGE:2/2