

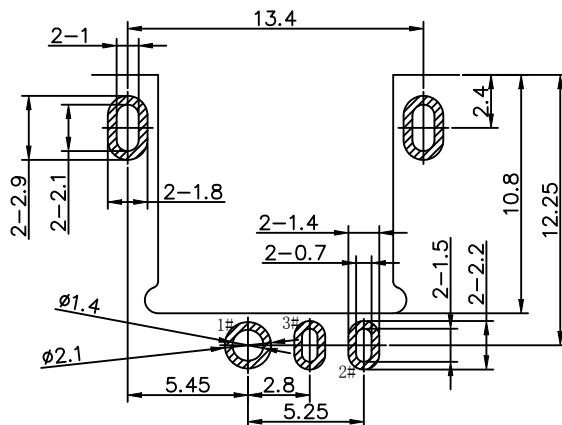


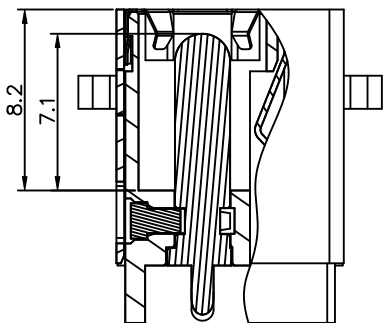






PCB LAYOUT
TOP VIEW (TOLERANCE: ±0.05)

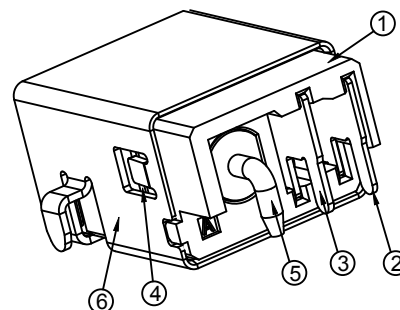



规格:

1. 额定值: DC35V 8 A
2. 接触电阻: $\leq 30\text{m}\Omega$
3. 绝缘电阻: $\geq 100\text{M}\Omega$
4. 耐电压: 500VAC
5. 插拔力: 3N~30N
6. 使用寿命: 5000次
7. 使用温度: $-20^{\circ}\text{C} \sim +80^{\circ}\text{C}$

PIN	$\varnothing 2.0$	$\varnothing 2.5$
APPO		

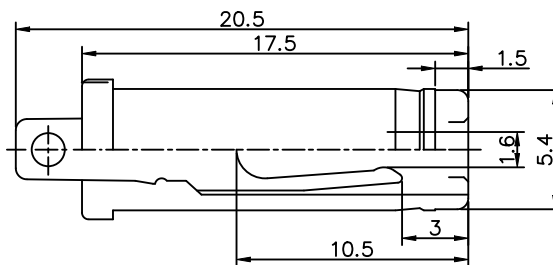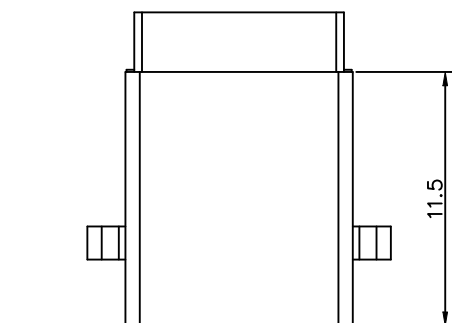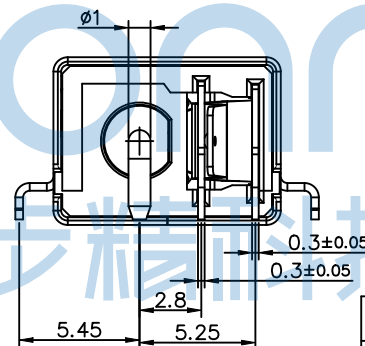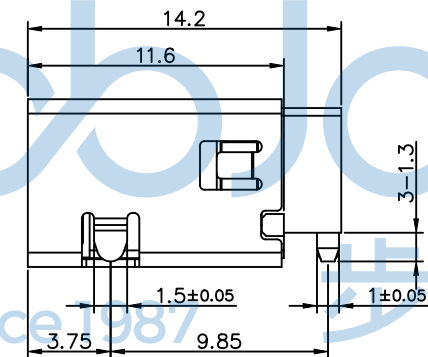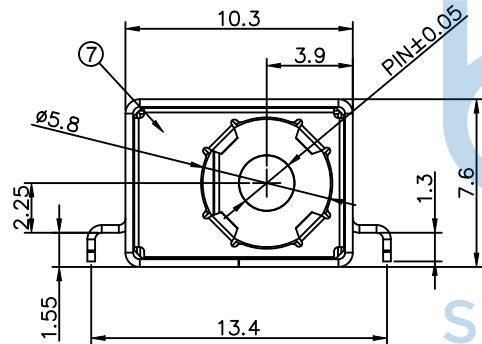

MATING PLUG $\varnothing 5.50$

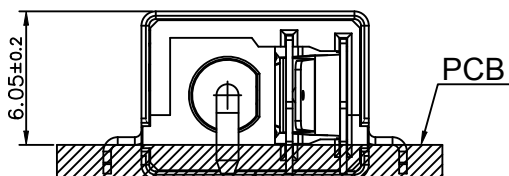

SCHEMATIC

7	面板	不锈钢	1	本色
6	外壳	黄铜	1	镀镍
5	PIN针	黄铜	1	镀金
4	固定片	LCP UL94V-0	1	黑色
3	静片	黄铜	1	镀银
2	弹片	磷铜	1	镀银
1	主体	LCP UL94V-0	1	黑色
序号	名称	材料	数量	颜色/电镀

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0050-2



深圳市步步精科技有限公司

.X: ± 0.38
.XX: ± 0.25
.XXX: ± 0.13

X*: $\pm 3^{\circ}$
.X*: $\pm 2^{\circ}$
.XX*: $\pm 1^{\circ}$

NAME: DC插座 DC-0125 2.5针 全铜 四脚插
L=14.20 沉板 1.55 CH2.25 DC35V 8A

APPD. JM_Zheng

CHKD. LYX

DR. TSP


PJ. NO.: 116-302-040003-Y2G
SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES


SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

PE袋规格: 260*185

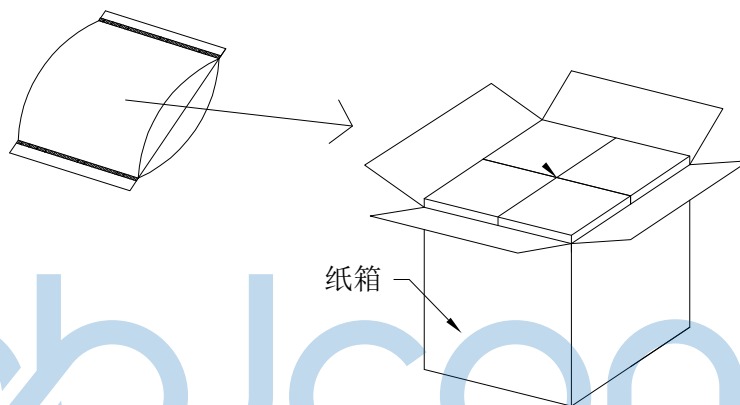

成品标签



1. 包装要求:

- 1.1 每个PE袋包装500pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计10000pcs;
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"	
APPD.		JM_Zheng	NAME: DC插座 DC-0125 2.5针 全铜 四脚插 L=14.20 沉板1.55 CH2.25 DC35V 8A
CHKD.		LYX	PJ. NO.: 116-302-040003-Y2G SIZE: A4 DRW NO.:
PDWG.NO: 0050-2		DR. TSP	FINISH: SEE NOTES SCALE: N/A
			MAT'L.: SEE NOTES REV.: A0 UNIT: mm PAGE: 2/2