
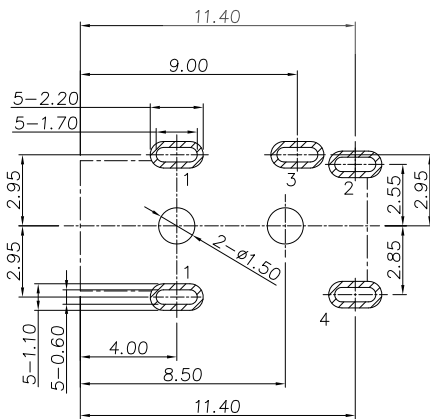
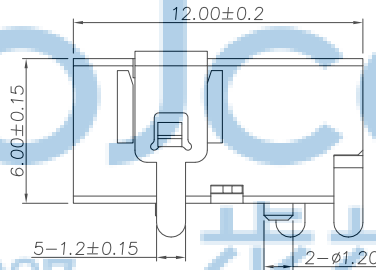
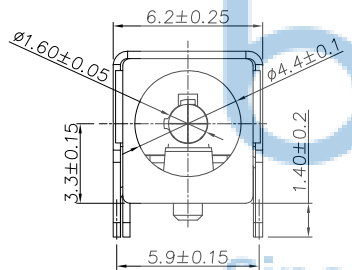





REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
 - 1-1. RATING: 24V 1A
 - 1-2. CONTACT RESISTANCE: $30m\Omega$ MAX. (INITIAL)
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 - 1-4. INSULATION RESISTANCE: $100M\Omega$ MIN. MEASURED BY 500V DC
- MECHANICAL CHARACTERISTICS:
 - 2-1. INSERTION FORCE : $0.3\sim 1.0$ KGF
 - 2-2. WITHDRAWAL FORCE : $0.3\sim 1.0$ KGF
- LIFE TEST: 5,000 CYCLES MIN.
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.

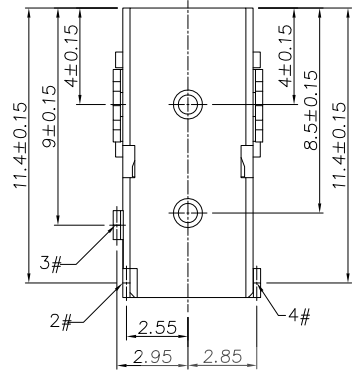

RECOMMENDED PCB LAYOUT
TOP VIEW (TOLERANCE:±0.05)



5	HOUSING	1	HIGH TEMPERATURE PLASTIC COLOR BLACK	
4	CONTACT PIN	1	BRASS; THE BOTTOM OF THE NICKEL; THE WHOLE MATTE TIN PLATING.	
3	TIP SPRING	1	PHORPHOS BRONZE; THE BOTTOM OF THE NICKEL;THE WHOLE MATTE TIN PLATING.	
2	CONCTOR PIN	1	BRASS; THE BOTTOM OF THE NICKEL; THE WHOLE SILVER PLATING.	
	POSITIONING PIN	1	BRASS; THE BOTTOM OF THE NICKEL; THE WHOLE SILVER PLATING.	
ITEM	NAME	Q'TY	DESCRIPTION	NOTE

TOLERANCE UNSPECIFIED





.0	±0.35
.00	±0.25
.000	±0.15
X.°	±2.00°
CUSTOMER DRAWING	

深圳市步步精科技有限公司

TITLE: DC插座 1.6针 五脚插 带柱1.20 全铜 (DCJR0027-F04A5BR-D)

DRAWN/ DATE	设计	TSP	SIZE:A4	UNIT:MM.	PART. NO: 116-302-050001-W4G	
CHECKED/ DATE	审核	LYX	SCALE: 1:1	PROJECTION	REV.: 版本	
APPROVED/ DATE	核准	LJP	DWG. PATH	0076-1	SHEET: 页码	

REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

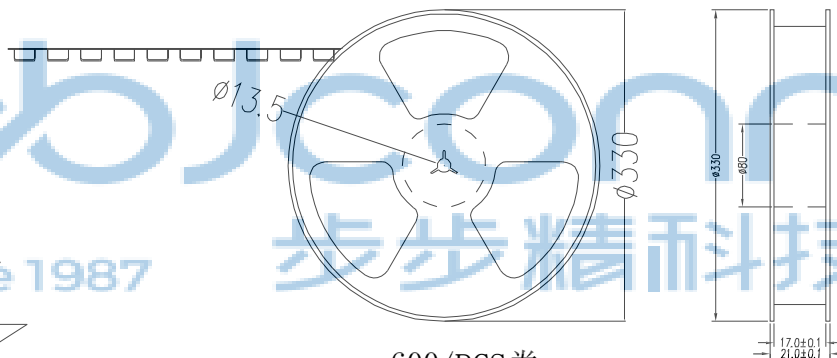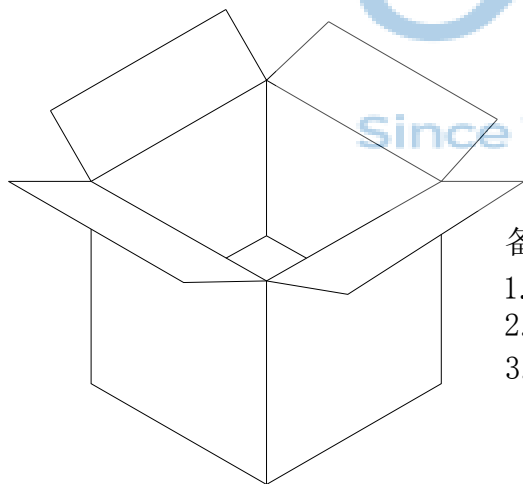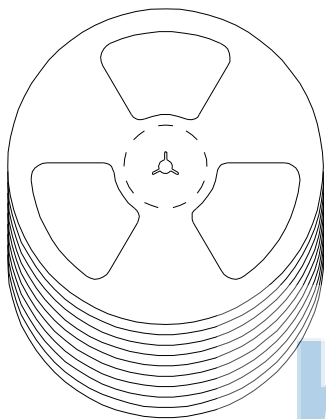

备注:

- 包装数量: 600/PCS/卷, 10卷/箱或15卷/箱。
- 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
- 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM
纸箱规格: 345*345*35MM

TOLERANCE UNSPECIFIED
.0 ±0.35
.00 ±0.25
.000 ±0.15
X.° ±2.00°
CUSTOMER DRAWING



深圳市步步精科技有限公司

TITLE: DC插座 1.6针 五脚插 带柱1.20 全铜(DCJR0027-F04A5BR-D)

DRAWN/ DATE	设计 TSP	SIZE:A4	UNIT:MM.	PART. NO: 116-302-050001-W4G	
CHECKED/ DATE	审核 LYX	SCALE: 1:1	PROJECTION		REV.: 版本
APPROVED/ DATE	核准 LJP	DWG. PATH	0076-1		SHEET: 页码