

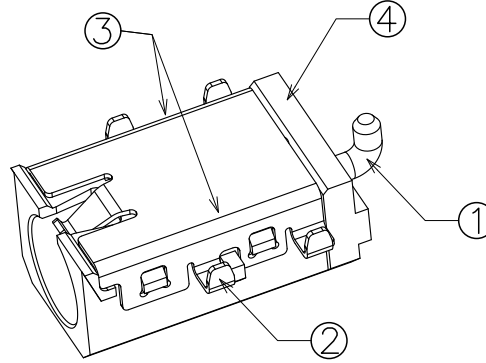
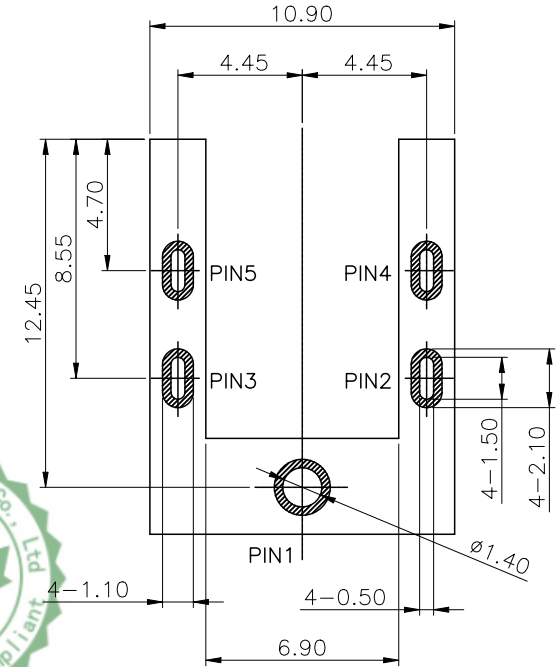


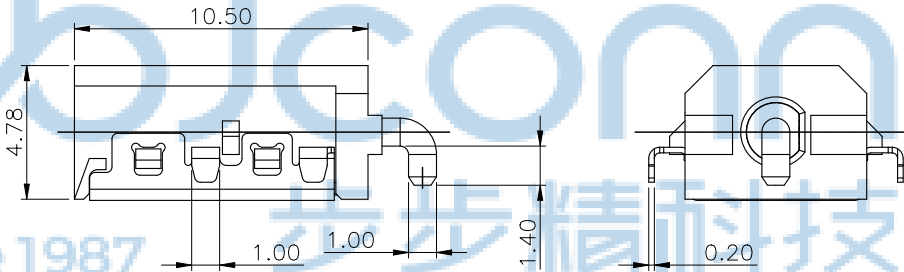



REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

NOTES:

1. CURRENT RATING: 3A AC/DC MAX.
2. CONTACT RESISTANCE: 30mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;

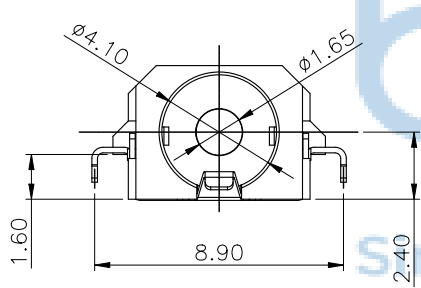

RECOMMENDED PCB LAYOUT

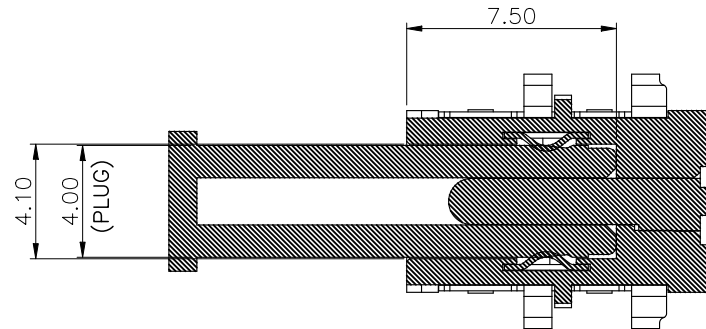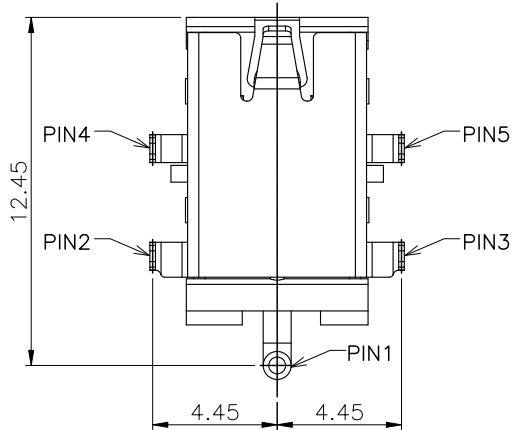

MATING PLUG SECTION



④	HOUSING	1	HIGH TEMPERATURE PLASTIC; BLACK
③	TERMINAL	2	PHOSPHOR BRONZE; NICKEL PLATING
②	SHELL	1	PHOSPHOR BRONZE; NICKEL UNDERPLATING OVERALL, GOLD PLATING ON THE WHOLE
①	CENTER PIN	1	BRASS; NICKEL UNDERPLATING OVERALL, GOLD PLATING ON THE WHOLE
ITEM	NAME	Q'TY	DESCRIPTION

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0076-1

深圳市步步精科技有限公司

.X: ±0.38 .X': ±3"
.XX: ±0.25 .X': ±2"
.XXX: ±0.13 .XX': ±1"

APPD JM_Zheng

CHKD LYX




DR SGF

NAME: DC插座 1.65针 沉板1.6 全铜
平口 四脚插 编带

PJ NO: 116-302-040004-W4G


SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES
SCALE:N/A REV:A0 UNIT:mm PAGE:1/2

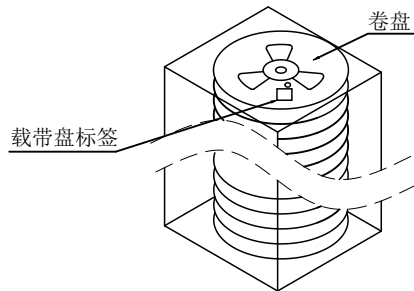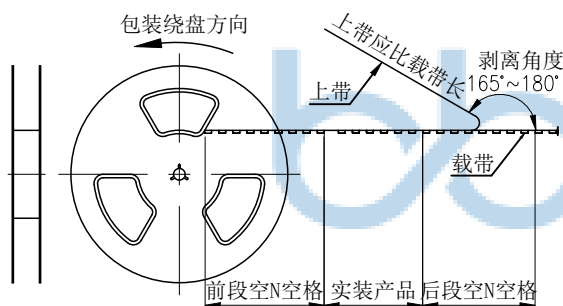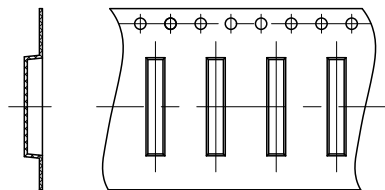

备注:

- 1、包装数量: 1000/PCS/卷, 10卷/箱。
- 2、包装袋长度: 每卷前后各空10-20个空格, 中间包装。
- 3、材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

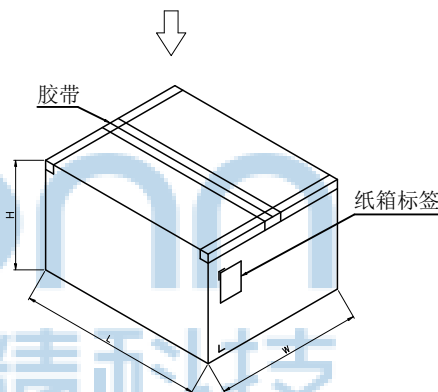

纸箱规格: W345*L345*H230MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION. PDWG NO: 0076-1		深圳市步步精科技有限公司			
		.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13	X': $\pm 3'$.X': $\pm 2'$.XX': $\pm 1'$	NAME: DC插座 1.65针 沉板1.6 全铜 平口 四脚插 编带	
		APPD	JM_Zheng		PJ NO: 116-302-040004-W4G
		CHKD	LYX	SIZE: A4	DRW NO:
		DR	SGF	FINISH: SEE NOTES	MAT'L: SEE NOTES
				SCALE: N/A	REV: A0
				UNIT: mm	PAGE: 2/2