

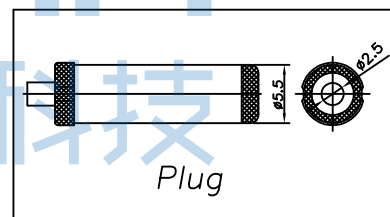


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

技术要求

1. 额定值：DC 30V 3A；
2. 接触电阻： $\leq 30\text{m}\Omega$ ；
3. 绝缘电阻： $\geq 100\text{M}\Omega$ ；
4. 耐压：AC500V (50Hz) 1min；
5. 插拔力：3-30N；
6. 使用温度范围： $-30\sim 70^{\circ}\text{C}$ ；
7. 使用寿命5000次；



9	垫 片	黄铜 H62	镀 镍	1	
8	螺 母	黄铜 H62	镀 镍	1	
7	绝缘板			2	
6	圆 针	黄铜 H62	铜 锡	1	
5	铜 套	黄铜 H62	镀 镍	1	
4	接触片	黄铜 H62 Y=0.4	铜 锡	1	
3	弹 片	磷铜C5191 T=0.5	铜 锡	1	
2	弯 脚	黄铜 H62 Y=0.35	铜 锡	1	
1	基 座	PBT		1	黑色
序号	零件名称	材 料	电 镀	数 量	备 注



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG,NO: 0496-1



深圳市步步精科技有限公司

NAME:


DC插座 DC-027M-2 5 2 5针 全铜 三脚插 配螺母垫片

PJ. NO.: DC.02.72-11-K002


SIZE: A4 | DRW NO.:

FINISH: SEE NOTES	MAT'L.: SEE NOTES
-------------------	-------------------


SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 1 / 2
------------	----------	----------	-------------

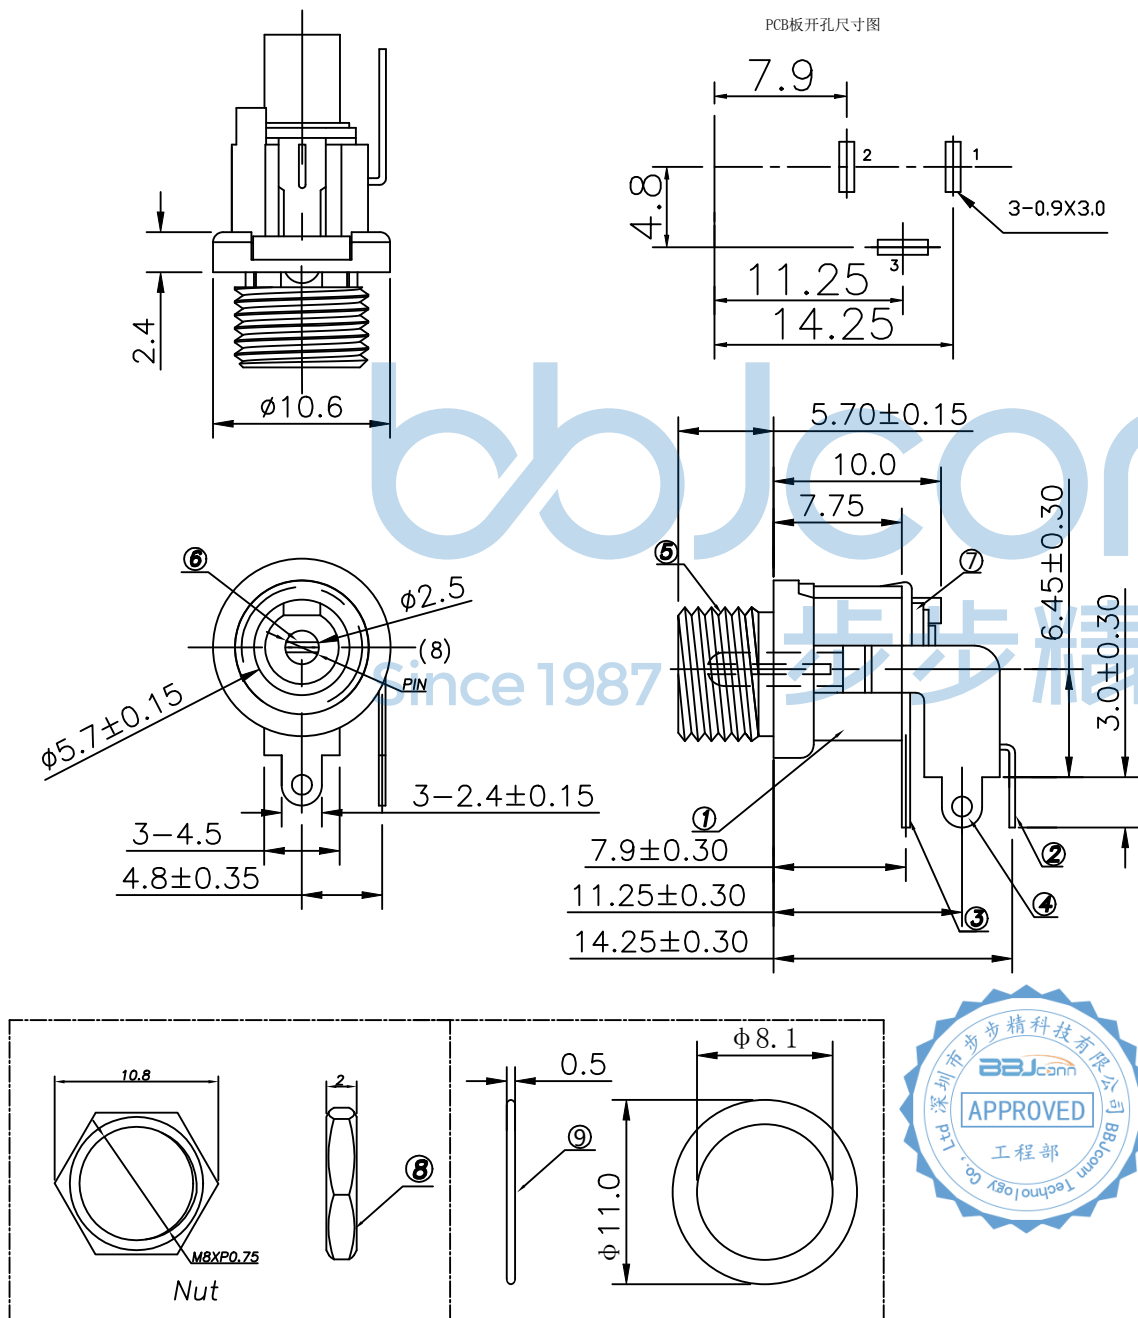

PE袋规格: 260*185

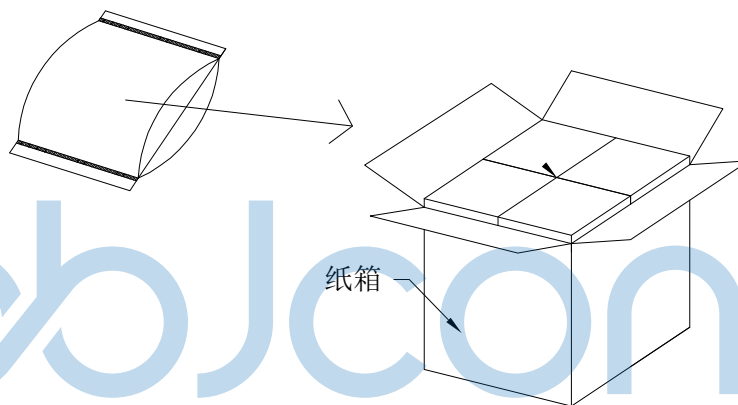

成品标签



1. 包装要求:

- 1.1 每个PE袋包装500pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计10000pcs;
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG,NO: 0496-1		深圳市步步精科技有限公司		NAME: DC插座 DC-027M-2.5 2.5针 全铜 三脚插 配螺母垫片	
				PJ. NO.: DC.02.72-11-K002	
				SIZE: A4	DRW NO.:
				FINISH: SEE NOTES	MAT'L.: SEE NOTES
APPD. JM_Zheng		CHKD. LYX		SCALE: N/A	REV.: A0
DR. TSP				UNIT: mm	PAGE: 2/2