


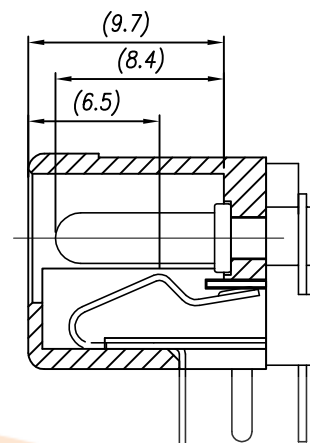
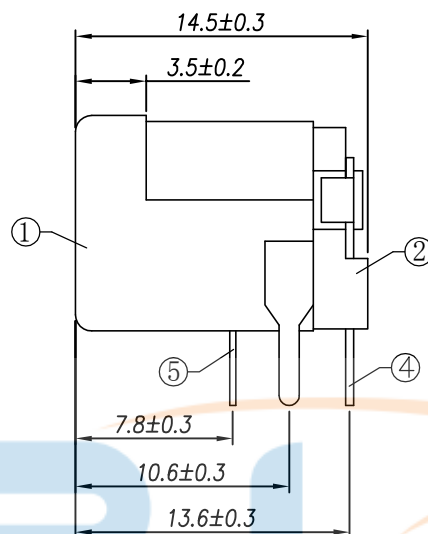
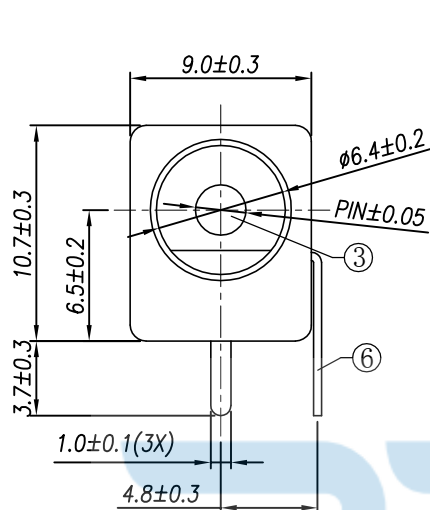


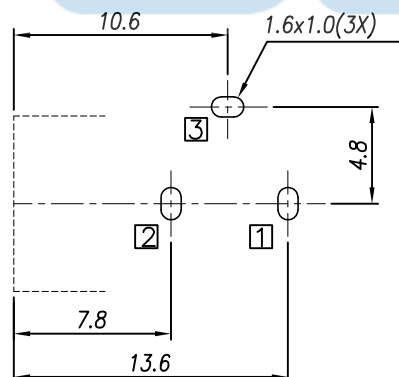

- Specification:
1. Rating : DC 20V 4A.
 2. Contact resistance: $\leq 30\text{m}\Omega$.
After test: $\leq 50\text{m}\Omega$.
 3. Insulation resistance: $\geq 100\text{M}\Omega$ (500VDC).
After test: $\geq 50\text{M}\Omega$.
 4. Withstanding voltage: 500VAC.
 5. Insertion and extraction force: 3N~30N.
 6. life test: 5000cycles min.
 7. Operation temperature range: $-20^\circ\text{C}\sim 70^\circ\text{C}$.
 8. Preservative temperature range: $-40^\circ\text{C}\sim 85^\circ\text{C}$.

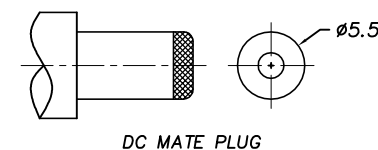

RECOMMENDED P. C. B. LAYOUT
UNSPECIFIED TOLERANCE: ± 0.05
(BOTTOM VIEW)



□ : TERMINAL NO.



NO.	DESCRIPTION	QTY	MATERIAL	PART NO	REMARK
⑥	Shunt terminal	3	Brass t0.4	DC5006B-03(WP-1106)	Tin plating
⑤	Tip spring	1	Phosphor bronze t0.3	DC5006B-02(TP-1107)	Tin plating
④	Center pin terminal	1	Brass t0.4	DC5006B-01(PP-1108)	Tin plating
③	Center pin	1	Copper alloy	DC00050-99H/J/J	CuSn/Nickel plating
②	Cover	1	PBT	DC50050-S2(GZ-844)	Black
①	Housing	1	PBT	DC50060-S1(ST-846)	Black

Model No.	DC5006B-_H	DC5006B-_J	DC5006B-_J
PIN	2.0	2.35	2.5

TOLERANCE UNSPECIFIED

.0	± 0.35
.00	± 0.25
.000	± 0.15
X.°	$\pm 2.00^\circ$

CUSTOMER DRAWING



深圳市步步精科技有限公司

TITLE: DC座 DC5006B 2.0针 三脚插 全铜

DRAWN/ DATE	设计 LHC	SIZE:A4	UNIT:MM.	PART. NO: 116-302-030001-J8G	
CHECKED/ DATE	审核 LYX	SCALE: 1:1	PROJECTION	REV.: 版本	
APPROVED/ DATE	核准 LJP	DWG. PATH	0498-1	SHEET: 页码	



PE袋规格:***X*** (以实际出货为准)

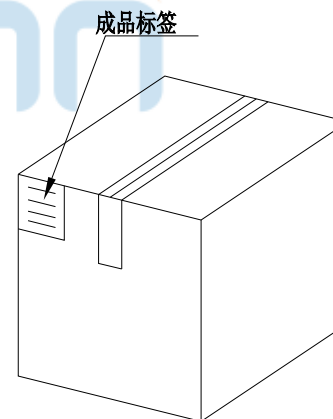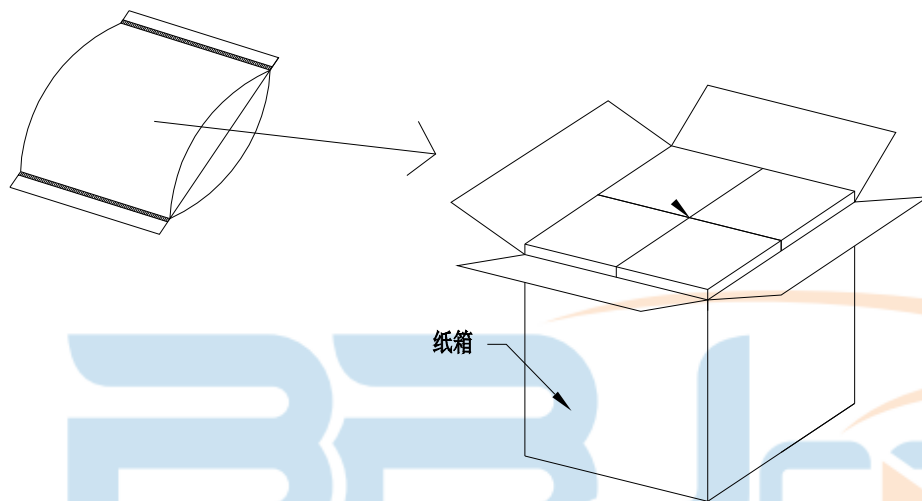

1. 包装要求:

- 1.1 每PE袋包装 500 pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计10000PCS
- 1.4 纸箱外贴上标签

TOLERANCE UNSPECIFIED			JBS 深圳市步步精科技有限公司			
.0	±0.35					
.00	±0.25		TITLE: DC座 DC5006B 2.0针 三脚插 全铜			
.000	±0.15		DRAWN/ 设计 LHC			
X. °	±2.00°		UNIT:MM.			
CUSTOMER DRAWING			PART. NO: 116-302-030001-J8G			
CHECKED/ DATE	审核	LYX	SCALE: 1:1	PROJECTION	REV.: 版本	
APPROVED/ DATE	核准	LJP	DWG. PATH	0498-1	SHEET: 页码	