


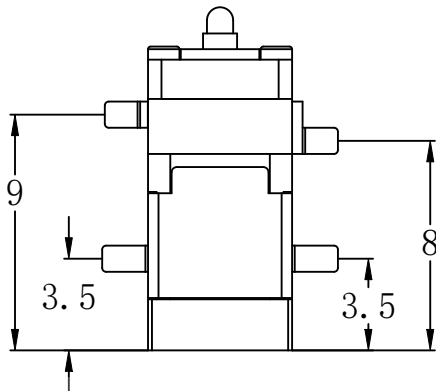
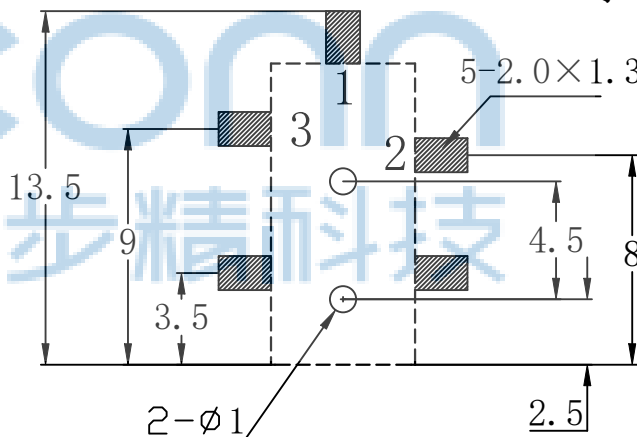


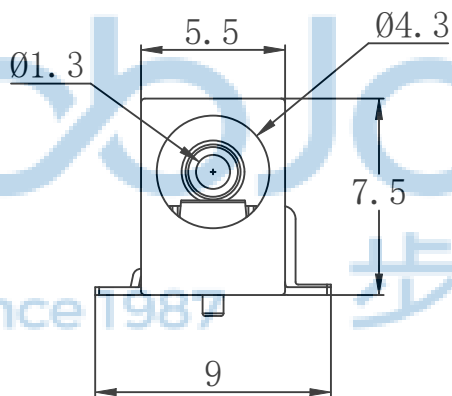


主要技术性能


1. 额定电负荷: 30V•0.5A;
2. 接 触 电 阻: $\leq 0.03 \Omega$;
3. 绝 缘 电 阻: $\geq 100M\Omega$;
4. 耐 压: AC500V(50Hz)/min;
5. 插 拔 力: 3~20N;
6. 寿 命: 5,000次。

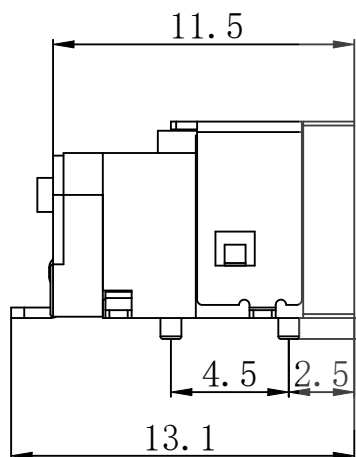

线路板开孔尺寸

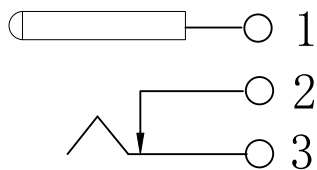

电路原理图

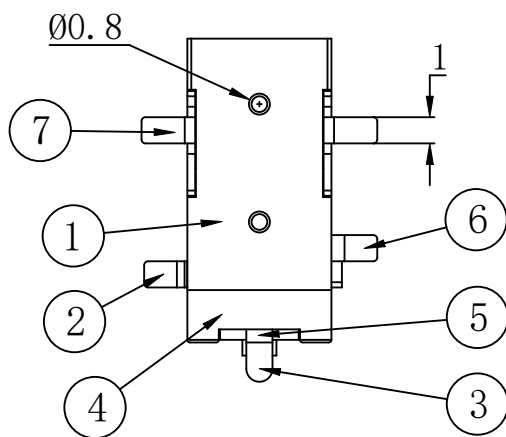

7	支 架	1	H62黄铜带(Y) $\delta=0.30\text{mm}$	D. Ag
6	弯 片	1	H62黄铜带(Y) $\delta=0.30\text{mm}$	D. Ag
5	插 针	1	H59黄铜棒 $\Phi=2.0\text{mm}$	D. CuSn
4	后 盖	1	PA9T工程塑料	黑
3	平 片	1	H62黄铜带(Y) $\delta=0.30\text{mm}$	D. Ag
2	簧 片	1	磷铜带 $\delta=0.30\text{mm}$	D. Ag
1	基 座	1	PA9T工程塑料	黑
序号	名 称	数量	材 料	备 注

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0947-1

深圳市步步精科技有限公司

.X: ± 0.38 X': $\pm 3'$
.XX: ± 0.25 .X': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

APPD. JM_Zheng

CHKD. LYX

DR. SGF





NAME:
DC插座 1.3针 全铜 五脚贴 带柱 编带 (DC-002T)

PJ. NO.:116-301-050001-J8G

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

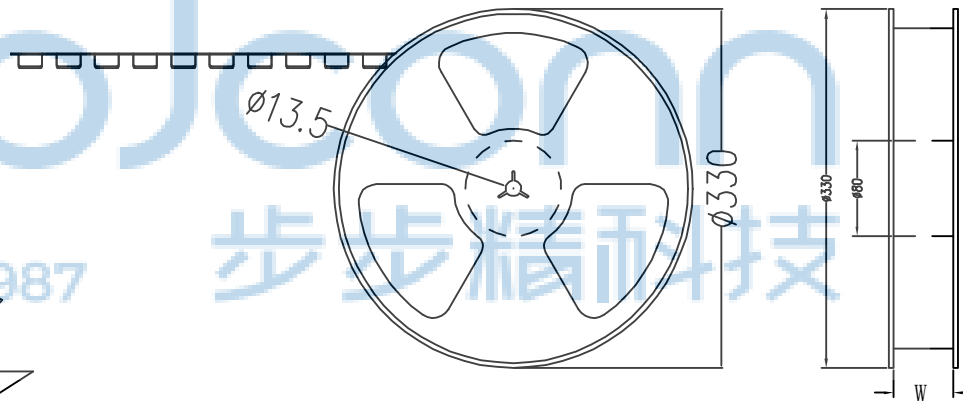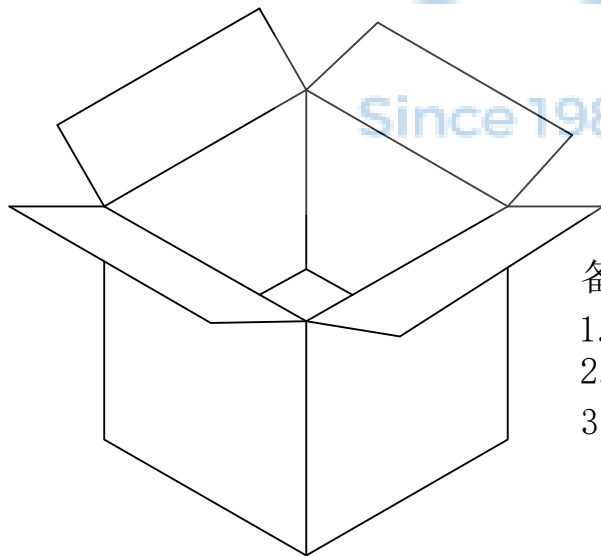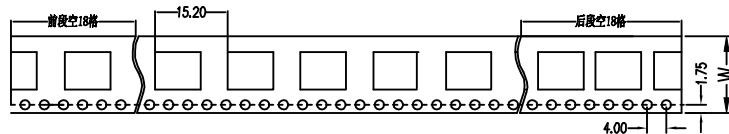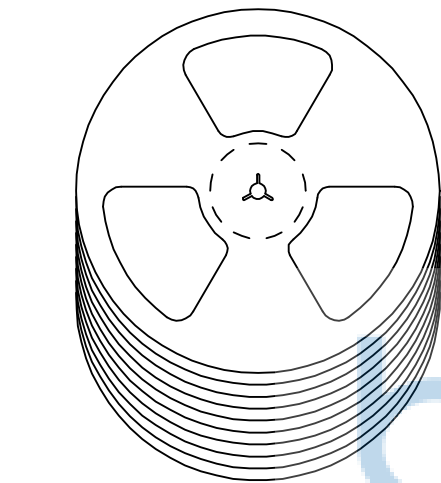

备注:

- 包装数量: 500/PCS/卷, 10卷/箱。
- 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
- 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*230MM

纸箱规格: 345*345*350MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		NAME: DC插座 1.3针 全铜 五脚贴 带柱 编带 (DC-002T)	
X': $\pm 3'$.X': $\pm 2'$.XX': $\pm 1'$		P.J. NO.:116-301-050001-J8G	
APPD. JM_Zheng		SIZE: A4/DRW NO.:	
CHKD. LYX		FINISH: SEE NOTES	
PDWG.NO: 0947-1		MAT'L.: SEE NOTES	
DR. SGF		SCALE: N/A	
		REV.: A0	
		UNIT: mm	
		PAGE: 2/2	