




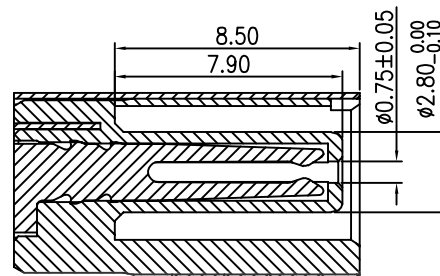





REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

SPECIFICATION:


1. RATING: DC 20V 6.5A
2. CONTACT RESISTANCE: $30\text{m}\Omega$ MAX.
3. INSULATION RESISTANCE: $100\text{M}\Omega$ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 6N MIN.
7. DURABILITY: 5,000 CYCLES

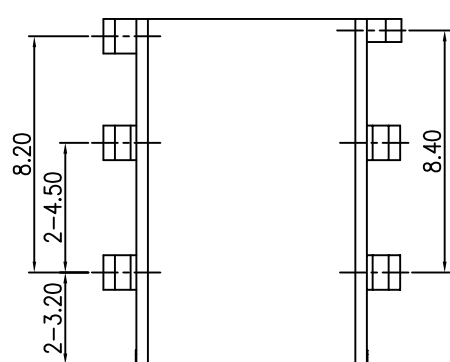

SECTION A-A

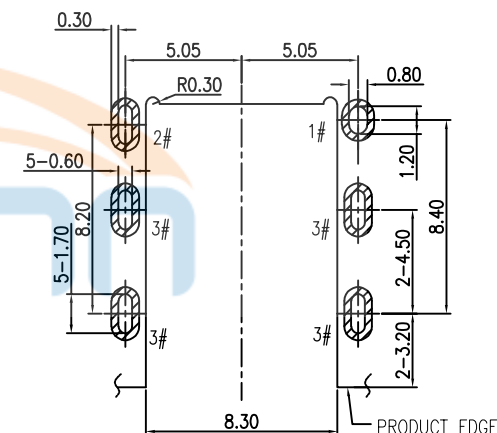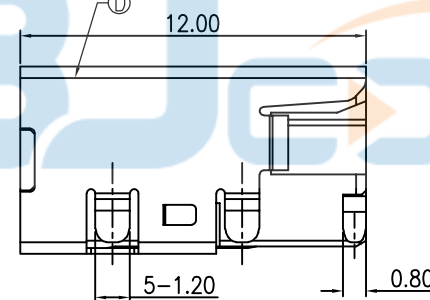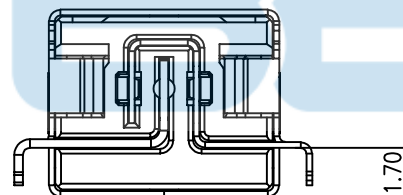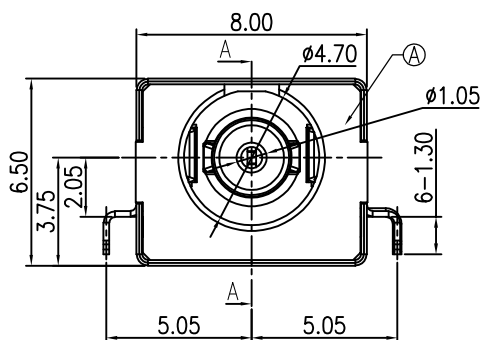

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE: ±0.05

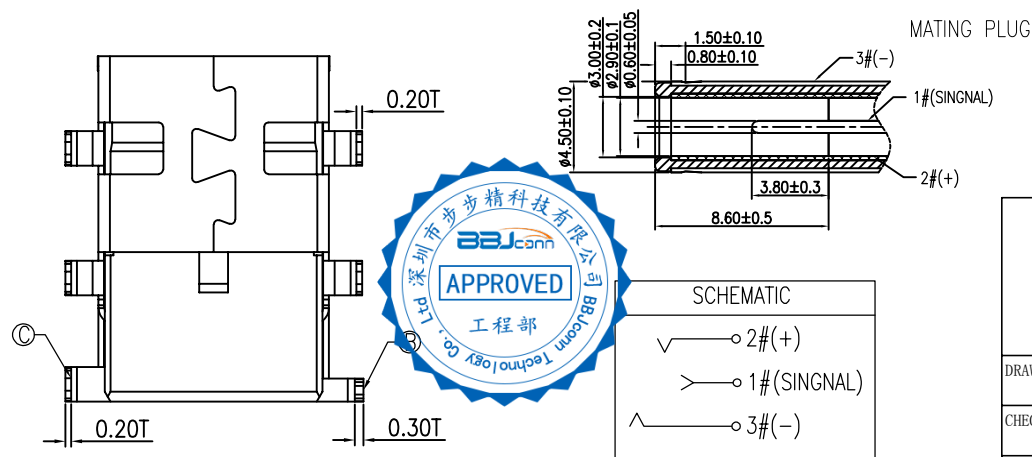

D	SHELL	COPPER ALLOY	Ni 50u"MIN.	1
C	SPRING	COPPER ALLOY	GOLD FLASH/MATTE TIN 80u"/Ni 40u"	1
B	CENTER PIN	COPPER ALLOY	GOLD FLASH/MATTE TIN 80u"/Ni 40u"	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

TOLERANCE UNSPECIFIED

.0	±0.35
.00	±0.25
.000	±0.15
X.°	±2.00°

CUSTOMER DRAWING



深圳市步步精科技有限公司

TITLE: DC450060-0148-30000H 沉板1.7 1.0针 全铜


DRAWN/DATE	设计 HMY	SIZE:A4	UNIT:MM.	PART. NO: 116-302-060002-P1G	
CHECKED/DATE	审核 LYX	SCALE: 1:1	PROJECTION	REV.: 版本	
APPROVED/DATE	核准 LJP	DWG. PATH	0386-2	SHEET: 页码	



拉出方向

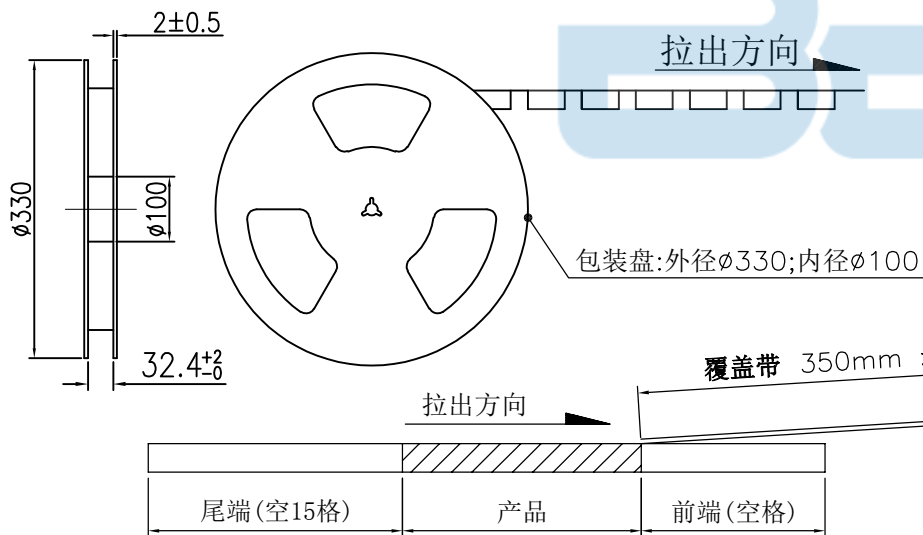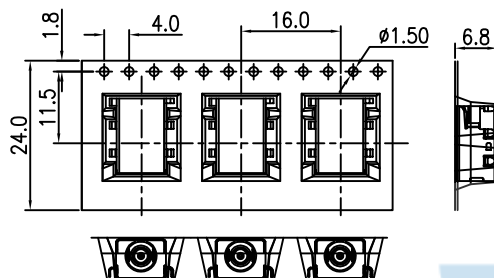

汽泡垫 2PCS



抽真空PE袋


包装盘标签

总共10层

PE袋:

外箱,1PCS

透明胶带



备注:

- 材料规格:
 - 载带: T=0.50mm, 黑色
 - 包装盘: 蓝色
 - 纸箱: L=335, W=335, H=300
- 包装数量:
500PCS/卷, 10卷(5000PCS)/箱
- 上盖带剥离力: 0.1N~0.7N(10~70gf);
剥离角度: 165°~180°;
剥离速度: 300mm/分钟.



TOLERANCE UNSPECIFIED

.0 ±0.35
.00 ±0.25
.000 ±0.15
X.° ±2.00°
CUSTOMER DRAWING

深圳市步步精科技有限公司

TITLE: DC450060-0148-30000H 沉板1.7 1.0针 全铜

DRAWN/ DATE	设计 HMY	SIZE:A4	UNIT:MM.	PART. NO: 116-302-060002-P1G	
CHECKED/ DATE	审核 LYX	SCALE: 1:1	PROJECTION	REV.: 版本	
APPROVED/ DATE	核准 LJP	DWG. PATH	0386-2	SHEET: 页码	