




REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		


主要技术性能

额定电负荷	DC 30V\0.5A
接触电阻	$\leq 0.03\Omega$
绝缘电阻	$\geq 100M\Omega$
耐 压	AC500V (50Hz)/min
插 拔 力	3-20N
使用温度范围	-30-70℃
使用寿命	5000次

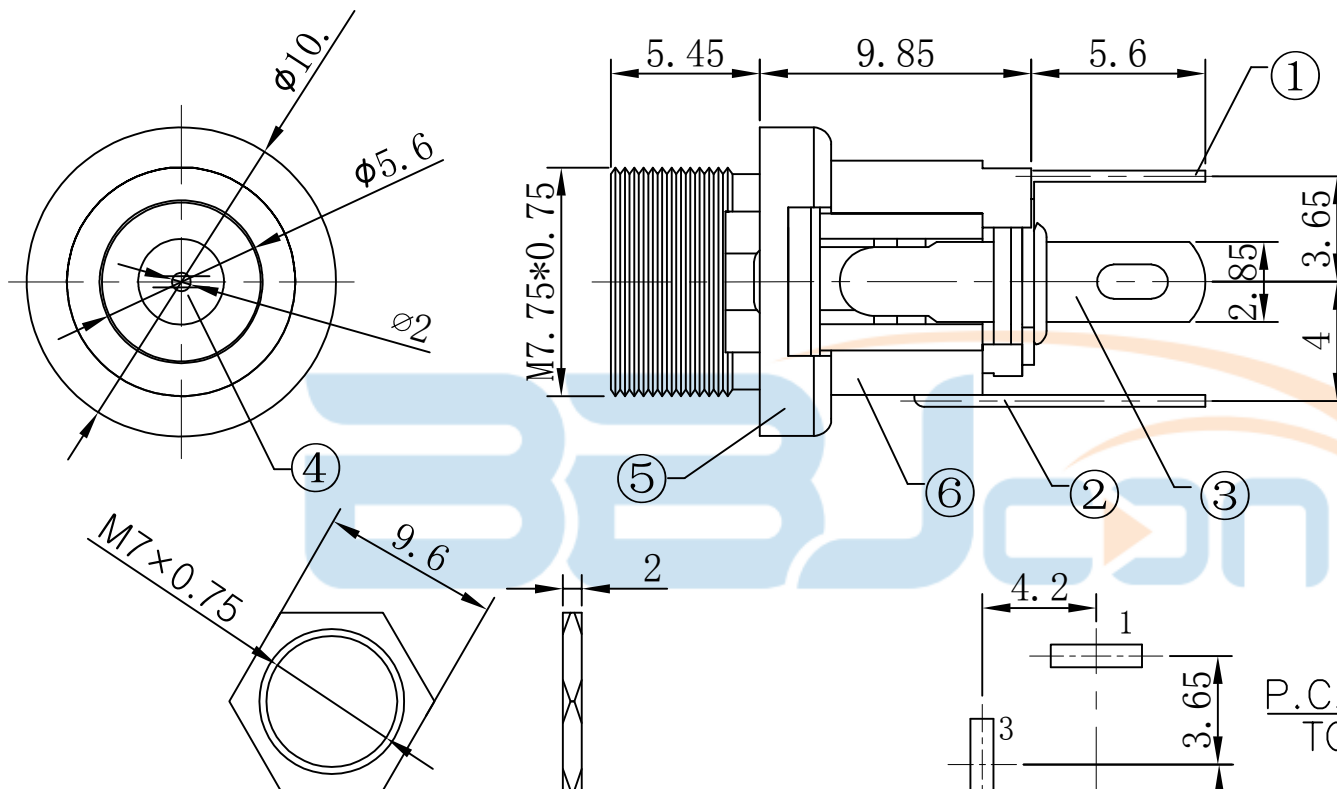

P.C.B LAYOUT
TOP VIEW

SCHEMATIC





PIN	$\phi 2.0$		$\phi 2.5$			
APPD.	DC-025M-2.0		DC-025M-2.5			
6	DC-025M-06	基 座	1	PA66	黑 色	
5	DC-025M-05	铜 套	1	黄 铜		锡 铈
4	DC-025M-04	圆 针	1	黄 铜	$\phi 2.0$	铜 锡
3	DC-025M-03	弹 片	1	磷 铜	T=0.5	锡 铈
2	DC-025M-02	弯 脚	1	黄 铜	T=0.4	锡 铈
1	DC-025M-01	平 片	1	黄 铜	T=0.35	锡 铈
序号	产品 编号	产 品 名 称	数 量	材 料	规 格	电 镀

公 差 X. ± 0.20 . X ± 0.10 . XX ± 0.05 . XXX ± 0.02 X°. $\pm 5^\circ$. X° $\pm 2^\circ$. XX° $\pm 1^\circ$		J B 深圳市步步精科技有限公司		TITLE: DC插座 DC-025M 2.0针 全铜(带螺纹)	
DRAWN/ DATE	设计 LYX	SIZE: A4	UNIT: MM.	PART. NO: 116-305-030004-Y2G	
CHECKED/ DATE	审核 HMY	SCALE: 1:1	PROJECTION	REV.: 版本	
APPROVED/ DATE	核准 LJP	DWG. PATH	0050-2	SHEET: 页码	



REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

PE袋规格: 260*185

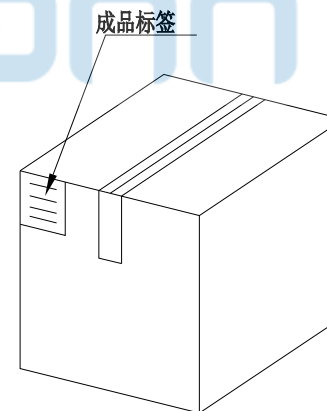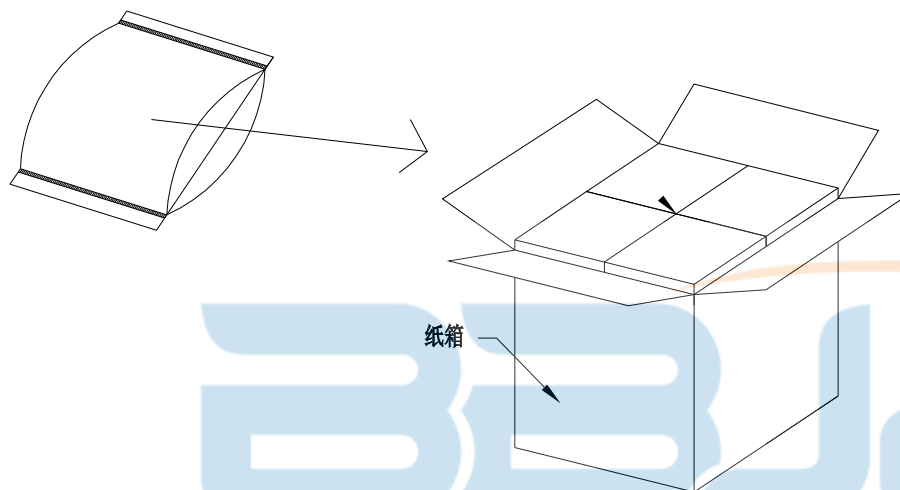

1. 包装要求:
- 1.1 每PE袋包装500 pcs;
 - 1.2 每1袋放一小纸盒;
 - 1.3 每20个小纸盒放一个纸箱,共计10000PCS
 - 1.4 纸箱外贴上标签



TOLERANCE UNSPECIFIED
.0 ±0.35
.00 ±0.25
.000 ±0.15
X.° ±2.00°
CUSTOMER DRAWING

深圳市步步精科技有限公司

TITLE: DC插座 DC-025M 2.0针 全铜(带螺纹)

DRAWN/ DATE	设计 LYX	SIZE: A4	UNIT: MM.	PART. NO: 116-305-030004-Y2G	
CHECKED/ DATE	审核 HMY	SCALE: 1:1	PROJECTION	REV.: 版本	
APPROVED/ DATE	核准 LJP	DWG. PATH	0050-2	SHEET: 页码	