
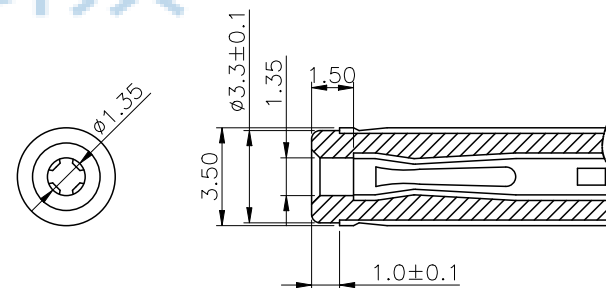


REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF





SPECIFICATIONS:
 1. ELECTRICAL CHARACTERISTICS:
 1-1. RATING: 3A
 1-2. CONTACT RESISTANCE: 30mΩ MAX.(INITIAL)
 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 1-4. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500V DC
 2. MECHANICAL CHARACTERISTICS:
 2-1. INSERTION FORCE : 0.3~3.0 KGF
 2-2. WITHDRAWAL FORCE : 0.3~3.0 KGF
 3. LIFE TEST: 5,000 CYCLES MIN.
 4. FOR REFLOW SOLDERING LEAD-FREE PROCESS.

○ #1 PIN(+)
 ^ #2 TIP SPRING(-)

ELECTRICAL CIRCUIT

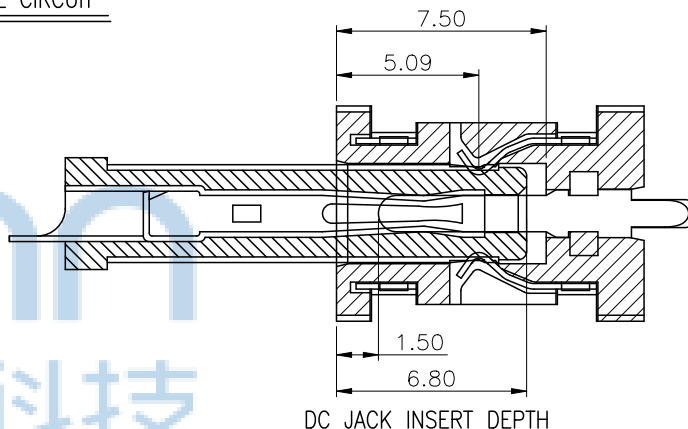

MATE PLUG

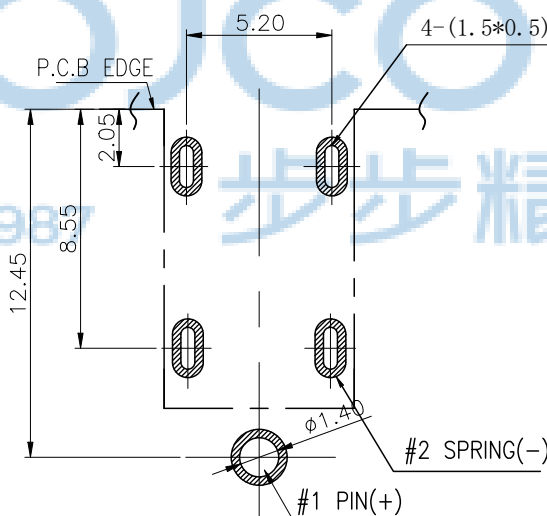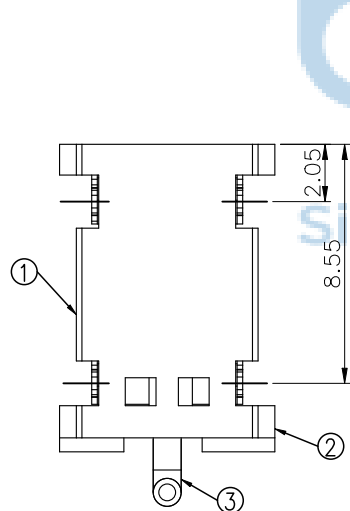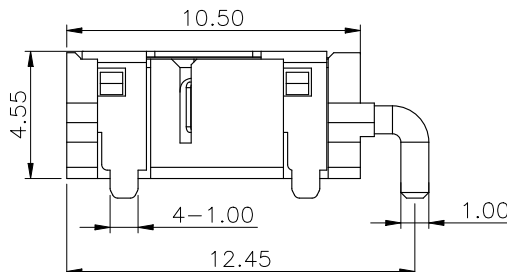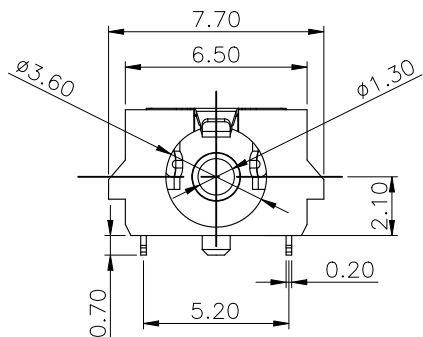

RECOMMENDED PCB LAYOUT TOP VIEW (TOLERANCE:±0.05)



ITEM	NAME	Q'TY	DESCRIPTION
3	SHELL	1	PHORPHOS BRONZE; THE BOTTOM OF THE NICKEL(40u"MIN.); THE WHOLE GOLD FLASH PLATING.
2	CONCTOR PIN	1	BRASS; THE BOTTOM OF THE NICKEL(40u"MIN.); THE WHOLE GOLD FLASH PLATING.
1	HOUSING	1	PA9T COLOR BLACK

NOTE

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO:0050-2

深圳市步步精科技有限公司

.X: ±0.38 X': ±3'
.XX: ±0.25 X': ±2'
.XXX: ±0.13 .XX': ±1'

APPD JM_Zheng

CHKD LYX

DR SGF




NAME: DC插座 DC-0045T-BS 1.3针 L=10.50
全铜 板上四脚插 编带

PJ NO: 116-302-040001-Y2G


SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES

SCALE:N/A REV:A0 UNIT:mm PAGE:1/2

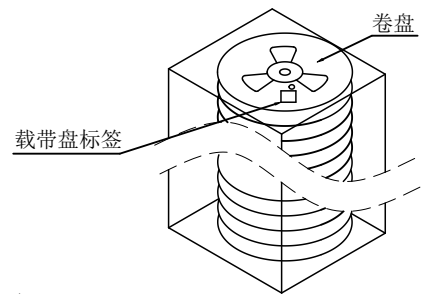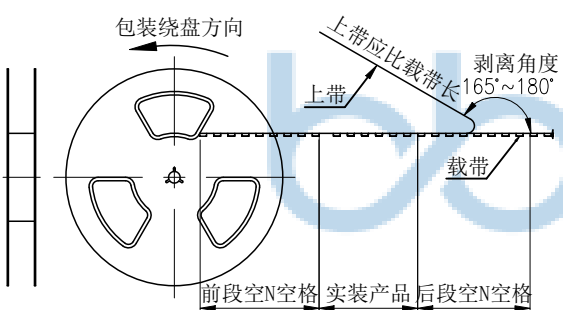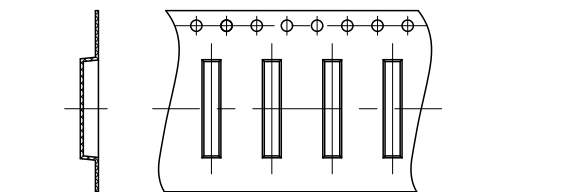

备注:
1、包装数量: 1000/PCS/卷, 10卷/箱。
2、包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3、材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

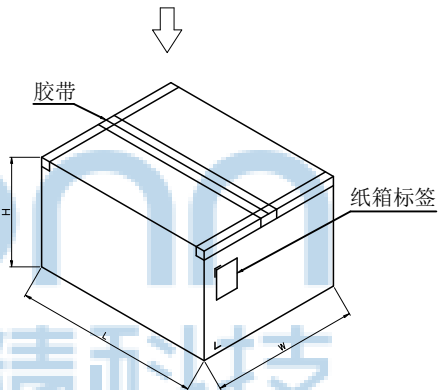

纸箱规格: W345*L345*H230MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION. PDWG NO:0050-2		深圳市步步精科技有限公司	
		.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13	X': $\pm 3'$.X': $\pm 2'$.XX': $\pm 1'$
		APPD JM_Zheng	NAME: DC插座 DC-0045T-BS 1.3针 L=10.50 全铜 板上四脚插 编带
		CHKD LYX	PJ NO: 116-302-040001-Y2G SIZE:A4 DRW NO:
DR SGF		FINISH:SEE NOTES SCALE:N/A	MAT'L:SEE NOTES UNIT:mm
		REV:A0	PAGE:2/2