
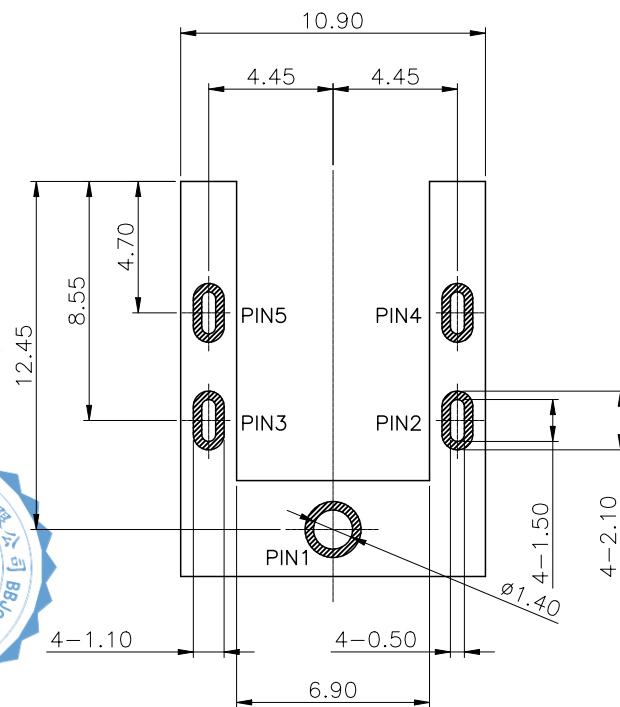
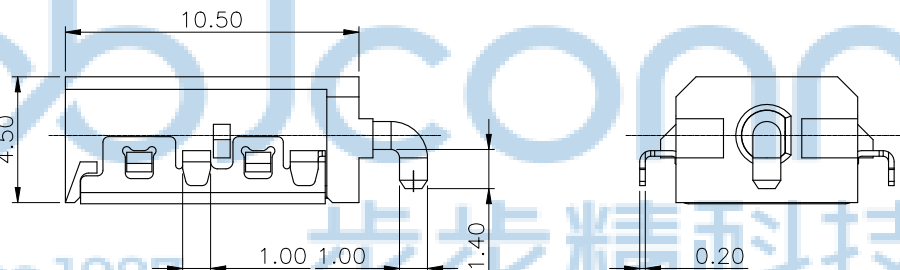
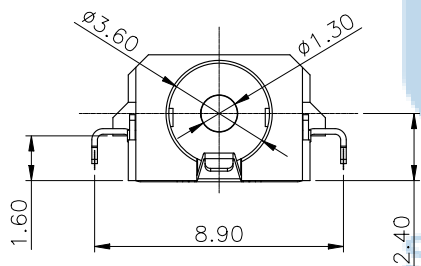
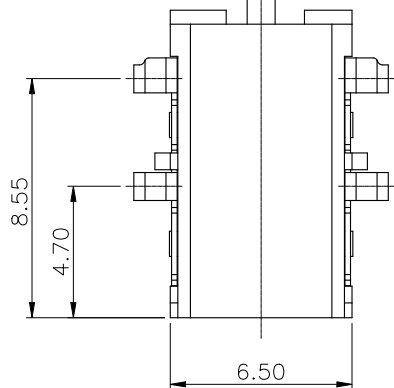



REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

NOTES:


1. CURRENT RATING: 3A AC/DC MAX.
2. CONTACT RESISTANCE: 30m Ω MAX.;
3. INSULATION RESISTANCE: 100M Ω MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;

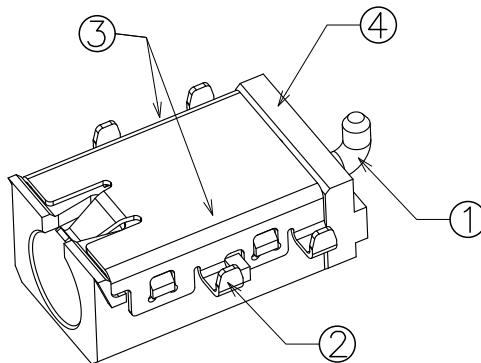

RECOMMENDED PCB LAYOUT

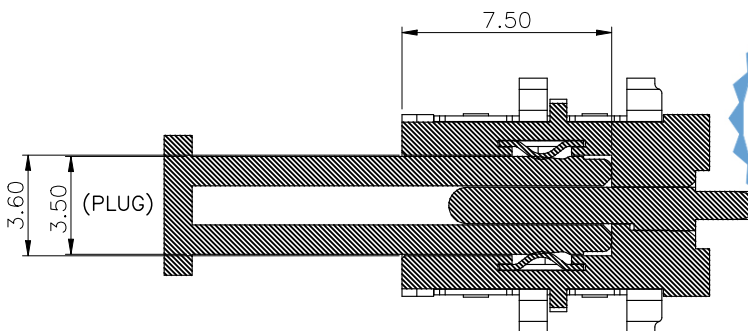

MATING PLUG SECTION

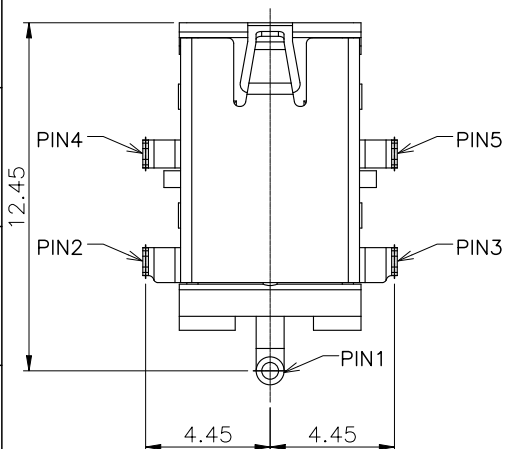

ITEM	NAME	Q'TY	DESCRIPTION
④	HOUSING	1	HIGH TEMPERATURE PLASTIC; BLACK
③	TERMINAL	2	PHOSPHOR BRONZE; NICKEL PLATING
②	SHELL	1	PHOSPHOR BRONZE; NICKEL UNDERPLATING OVERALL, GOLD PLATING ON THE WHOLE
①	CENTER PIN	1	BRASS; NICKEL UNDERPLATING OVERALL, GOLD PLATING ON THE WHOLE

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0076-1



深圳市步步精科技有限公司

.X: ± 0.38 X': $\pm 3'$
.XX: ± 0.25 X'': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

APPD JM_Zheng

CHKD LYX

DR

SGF

NAME:
DC插座 1.3针 沉板1.6 全铜 平口 四脚插 编带

PJ NO: 116-302-040002-W4G


SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES

SCALE:N/A REV:A0 UNIT:mm PAGE:1/2

备注:


1. 每载盘内必须放干燥剂;
2. 每箱必须按照要求增加PE防水袋包装;
3. 参考《高温材料管理规定》进行作业;
4. 条码+二维码标签和交货标签按客户要求制作;

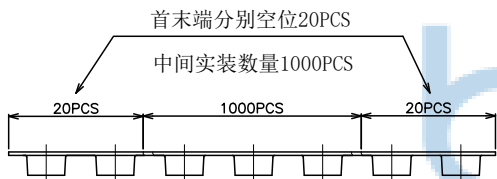


* 载带包装时依此方向引出

1载带=1000PCS

1外箱=1000PCSX10盘载带=10000PCS

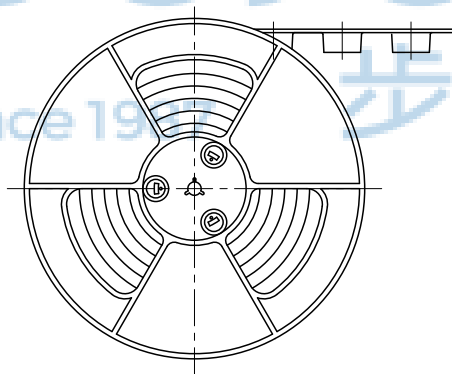


卷盘包装示意

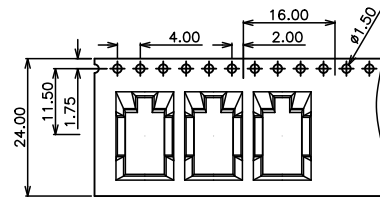

载带



载盘



标签一


4块三角板

PE 袋



标签二

纸箱

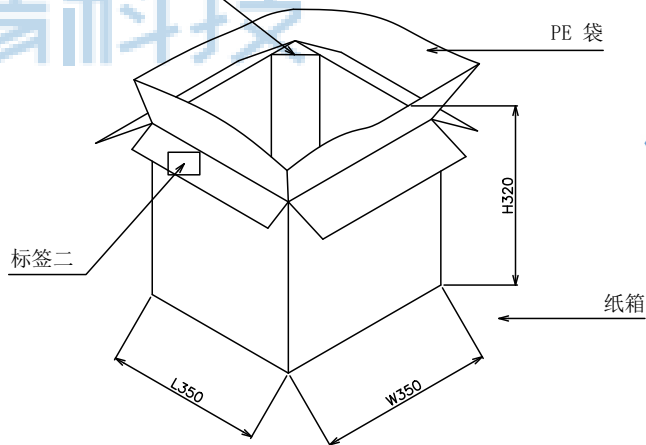

包材名称	材料及厚度(mm)	规格(mm)
DCJR0032载带	PET(白色透明)T=0.30	12480X24X0.35
载盘	HI P. S(蓝色)	φ330X28.40
自粘带	PET(白色透明)	W=25.5 T=0.06
纸 箱	K=K	350X350X320
PE 袋	PE	10X1PE袋

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.



深圳市步步精科技有限公司

.X: ±0.38 X': ±3'
.XX: ±0.25 .X': ±2'
.XXX: ±0.13 .XX': ±1'

NAME:
DC插座 1.3针 沉板1.6 全铜 平口 四脚插 编带

APPD JM_Zheng

PJ NO: 116-302-040002-W4G

CHKD LYX

SIZE:A4 DRW NO:

PDWG NO: 0076-1

DR SGF

FINISH:SEE NOTES MAT'L:SEE NOTES

SCALE:N/A REV:A0 UNIT:mm PAGE:2/2