


REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

NOTES:



- MATERIAL:
 - HOUSING: LCP, BLACK, UL94V-0
 - COVER: LCP, BLACK, UL94V-0
 - CONTACT: BRASS ,T=0.20mm
 - SHELL: STAINLESS STEEL,T=0.50mm
- PLATING:
 - CONTACT: CONTACT AREA: GOLD FLASH
SOLDER AREA: GOLD FLASH
UNDER NICKEL PLATED 50u"Min.
 - SHELL: NICKEL PLATED 30u"Min.
- MECHANICAL CHARACTERISTICS

INSERTION FORCE: 44.1N MAX
EXTROCTION FORCE: 9.8N MIN, 39.2N MAX
MATING CYCLE:10000 CYCLES
- ELECTRICAL CHARACTERISTICS

RATING CURRENT: 0.5A
RATING VOLTAGE: 40V
CONTACT RESISTANCE:CONTACT:30 MILLIOHMS MAXIMUM.
(CHANGE FROM INITIAL VALUE)
INSULATION RESISTANCE:
a, UNMATED: 100M OHMS MIN AT 500 VDC
b, MATED: 10M OHMS MIN AT 150 VDC
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/1MINUTE
OPERATING TEMPERATURE: -20°C--+85°C
STORAGE TEMPERATURE: -20°C--+65°C

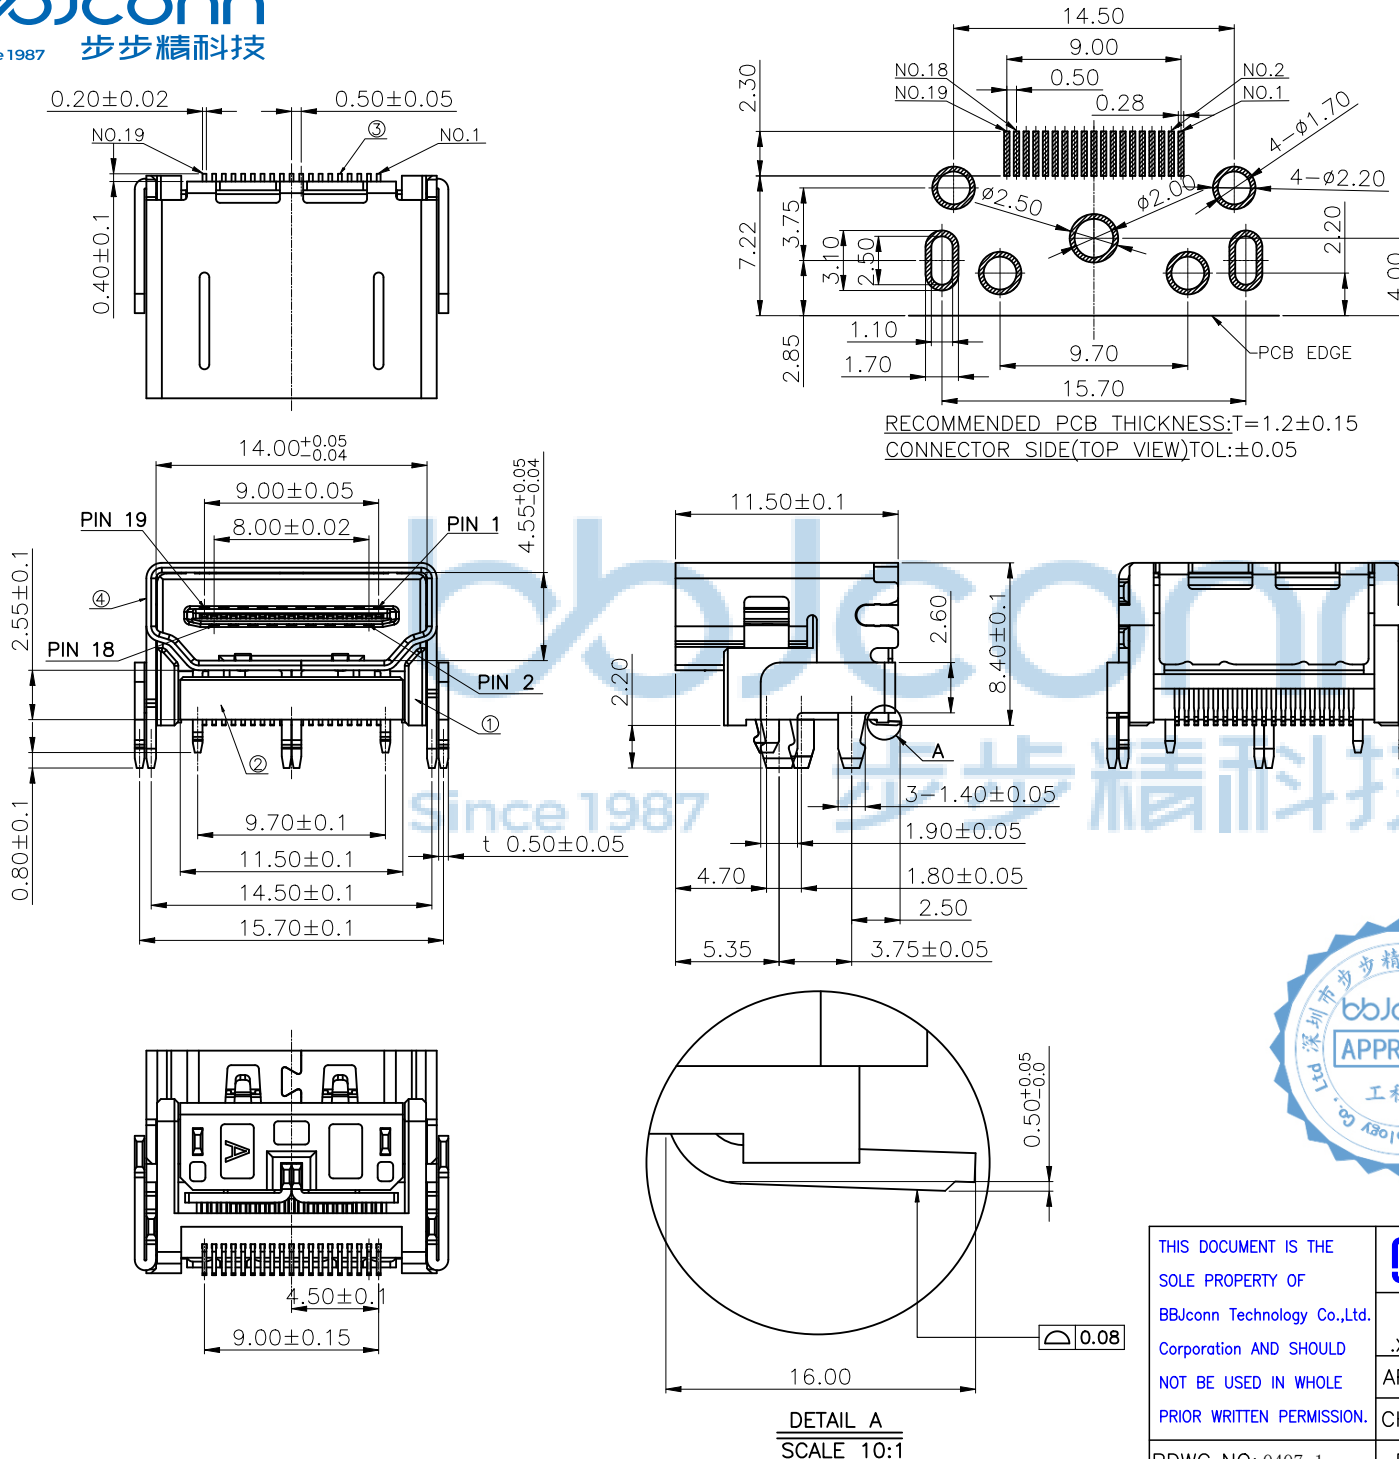

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 工程 部		NAME: HDMI 19P A母 七脚插 平口 端子SMT L=11.5 垫高2.6 不锈钢外壳 镀金GF 编带 PJ NO: 124-221-190003-W3G SIZE:A4 DRW NO: FINISH:SEE NOTES MAT'L:SEE NOTES SCALE:N/A REV:A0 UNIT:mm PAGE:1/2	
APPD	JM_Zheng	CHKD	LYX	DR	SGF
PDWG NO: 0407-1					

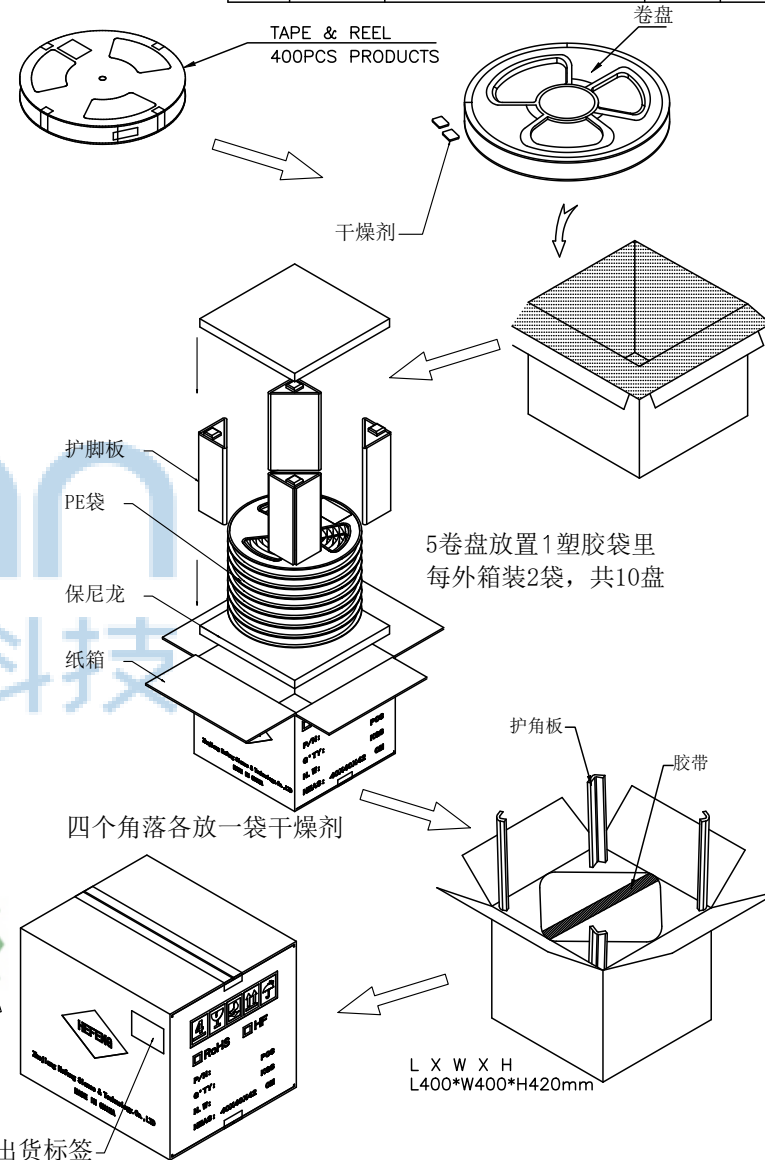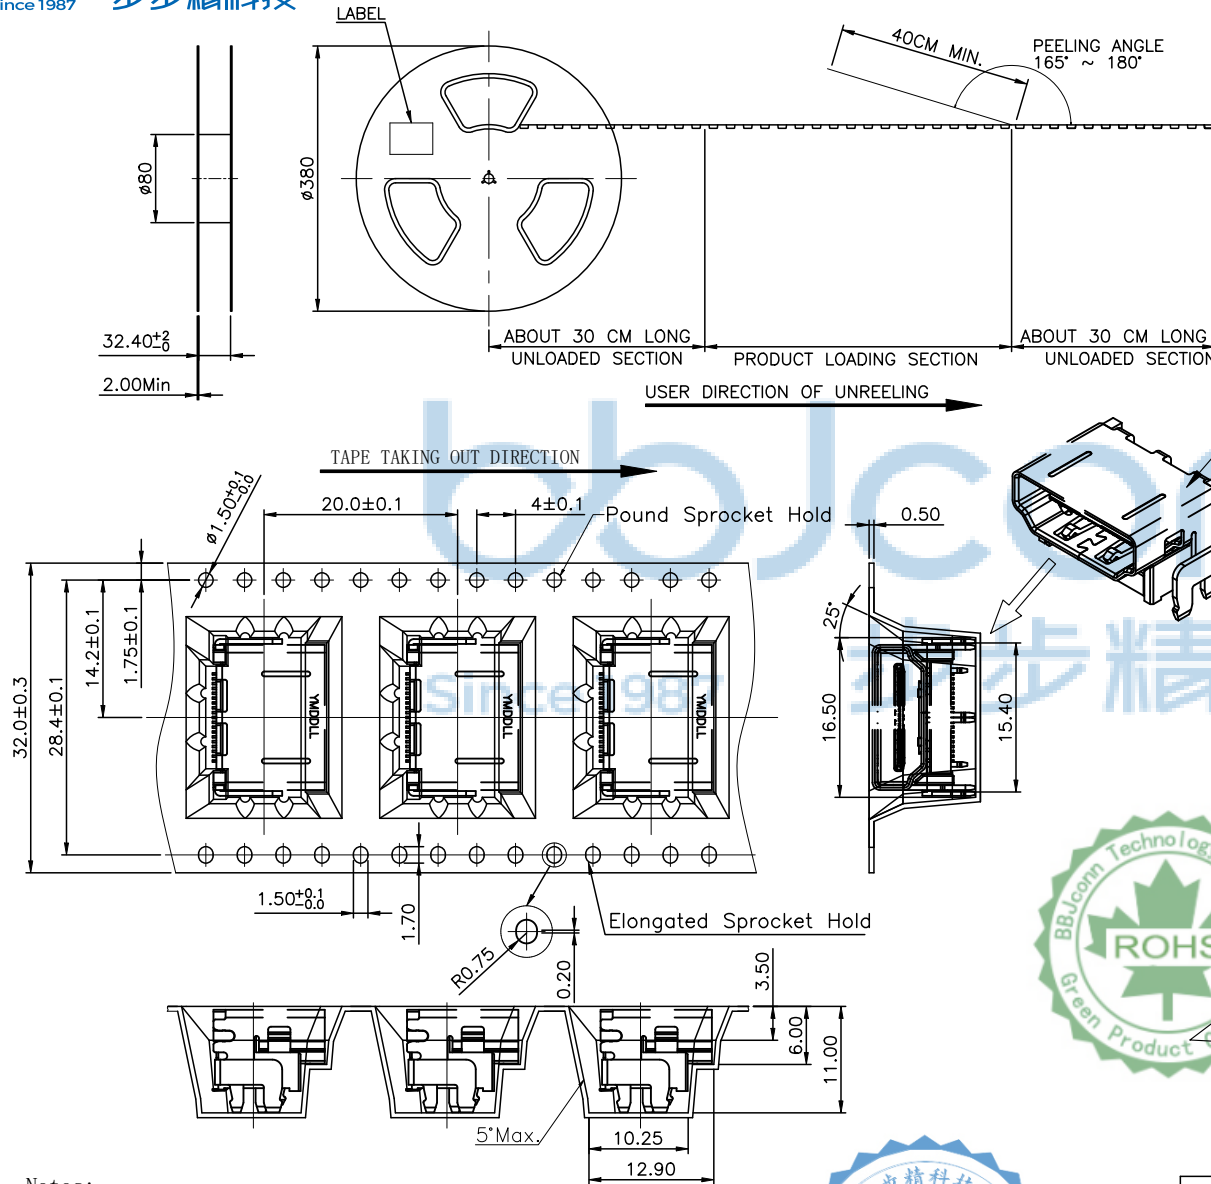

Notes:

1. 此部品, 禁止使用含有《环境管理物质控制标准》所限制的物质作为材料;
2. 卷带中每位置放置一个产品, 每卷卷带的前后端预留约15个孔位不使用;
3. 边放产品边用封胶带封口, 1个卷盘放置400个产品;
4. 然后再卷一圈保护带, 保护带最后重叠约50MM, 用皱纹胶纸将其封住;
5. 每个卷盘上贴“标签”; 装好PE袋, 并放入干燥剂一袋;
6. 5卷盘放置1塑料袋里每外箱装2袋, 共10盘,
7. 外箱外侧图示位置贴“外箱条码标签”. 每个外箱装4000PCS.



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0407-1

深圳市步步精科技有限公司

.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3' .X': ±2' .XX': ±1'	NAME: HDMI 19P A母 七脚插 平口 端子SMT L=11.5 垫高2.6 不锈钢外壳 镀金GF 编带	
APPD	JM_Zheng	PJ NO: 124-221-190003-W3G	
CHKD	LYX	SIZE:A4	DRW NO:
DR	SGF	FINISH:SEE NOTES	MAT'L:SEE NOTES
		SCALE:N/A	REV:A0
		UNIT:mm	PAGE:2/2