
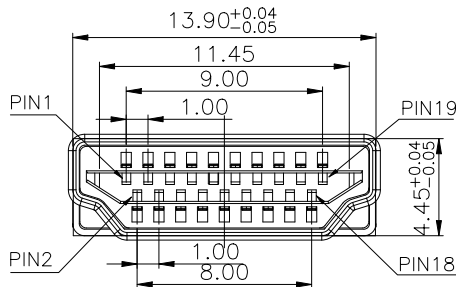
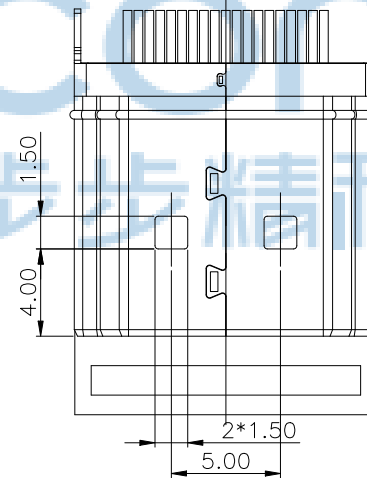
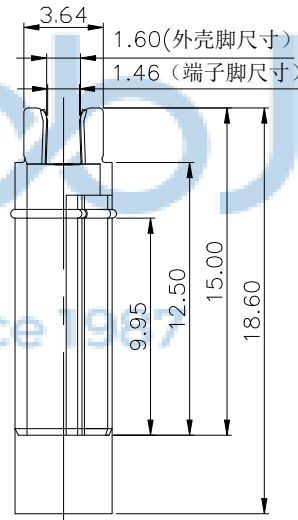
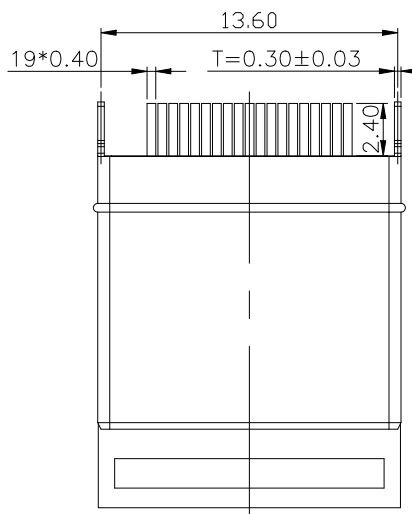



REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

NOTE :

1.SPECIFICATION:

- 1.1.CURRENT RATING: 0.5 Amp Max;
- 1.2.VOLTAGE RATING: 40 V ac(r.m.s) Max;
- 1.3.CONTACT RESISTANCE: 10m ohms Max.mated;
- 1.4.INSULATION RESISTANCE:100M ohms Min;
- 1.5.DIELECTRIC WITHSTANDING VOLTAGE:
AC 500V Min. (for 1 minute);
- 1.6.OPERATION TEMPERATURE RANGE:-25°C~85°C;
- 2.MECHANICAL
- 2.1 INSERTION FORCE:4.5KG MAX;
- 2.1 WITHDRAWAL FORCE:1.0KG ~4.0KG;

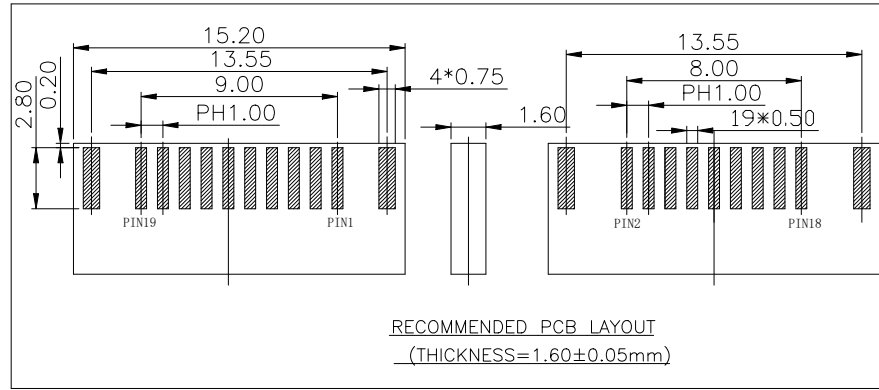

SHELL	SPCC	1	GOLD PLATED OVER G/F, PLATED OVER 50u" NI min.
9Pin CONTACT	C5191	9	CONTACT AREA: GOLD PLATED OVER 50u" NI min. SOLDED AREA:100u" MIST TIN PLATED OVER 50u" NI min.
10Pin CONTACT	C5191	10	CONTACT AREA: GOLD PLATED OVER 50u" NI min. SOLDED AREA:100u" MIST TIN PLATED OVER 50u" NI min.
BACK INSERT HOUSING	LCP	1	BLACK,UL 94V-0
HOUSING	LCP	1	BLACK,UL 94V-0
PART NAME	Mechanical	QTY	NOTE

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

深圳市步步精科技有限公司

.X: ±0.38 .X': ±3"
.XX: ±0.25 .X': ±2"
.XXX: ±0.13 .XX': ±1"

NAME: HDMI 19P A公 夹板1.6 L=12.5 弯脚
端子脚长2.4 铁壳 带塞子 盒装

APPD JM_Zheng

PJ NO:124-125-190001-T2G

CHKD LYX


SIZE:A4 DRW NO:

PDWG NO:0215-2


FINISH:SEE NOTES MAT'L:SEE NOTES

DR SGF


SCALE:N/A REV:A0 UNIT:mm PAGE:1/2

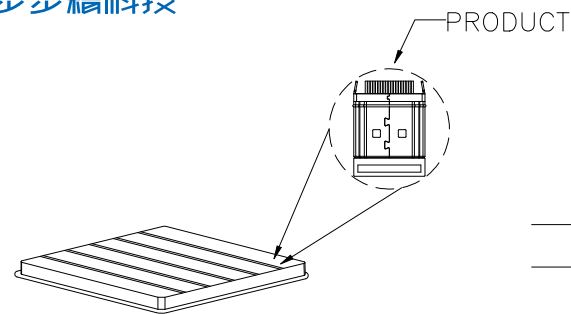


① TRAY(1PCS).80PCS/TRAY




②




③

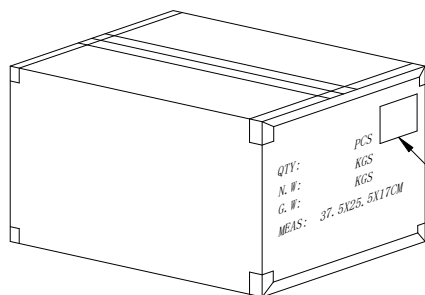

⑥

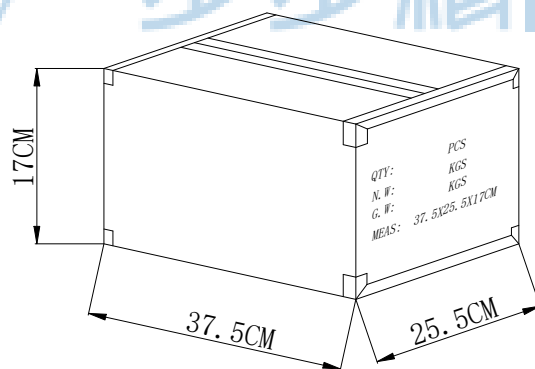

⑤

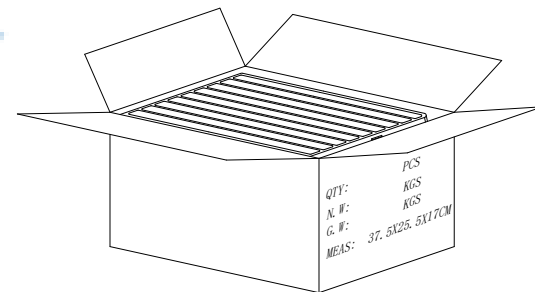

④



	TRAY	CARTON
CONNECTOR (PCS)	80PCS	4000PCS

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0215-2

深圳市步步精科技有限公司

.X: ±0.38 .X': ±3"
.XX: ±0.25 .X'': ±2"
.XXX: ±0.13 .X''': ±1"

APPD JM_Zheng

CHKD LYX

DR SGF

NAME: HDMI 19P A公 夹板1.6 L=12.5 弯脚
端子脚长2.4 铁壳 带塞子 盒装

PJ NO:124-125-190001-T2G

SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES

SCALE:N/A REV:A0 UNIT:mm PAGE:2/2