



REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS

- 1-1. CURRENT RATING: 0.5 AMP
- 1-2. VOLTAGE RATING: 40 V
- 1-3. CONTACT RESISTANCE: 30MILLIOHMS MAX
- 1-4. INSULATION RESISTANCE: 100M MIN. @ 500V






DC

- 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V

AC FOR 1 MINUTE

2. MECHANICAL CHARACTERISTICS:


- 2-1. INSERTION FORCE : 4.5KGF MAX.
- 2-2. WITHDRAWING FORCE : 1KGF ~ 4KGF.
- 3. LIFE TEST: 10000 CYCLES
- 4. OPERATING TEMPERATURE: -25°C TO +85°C

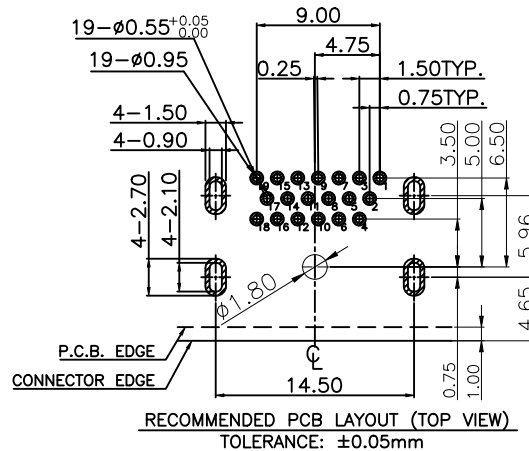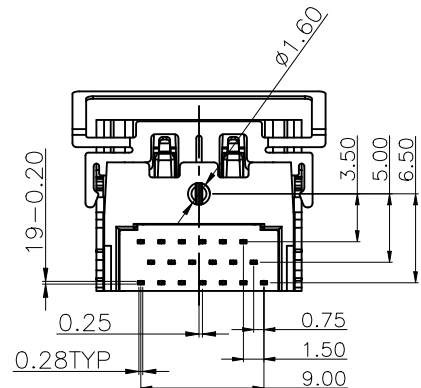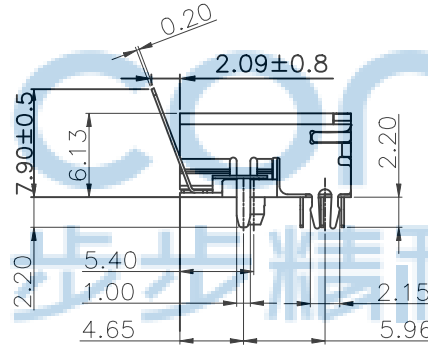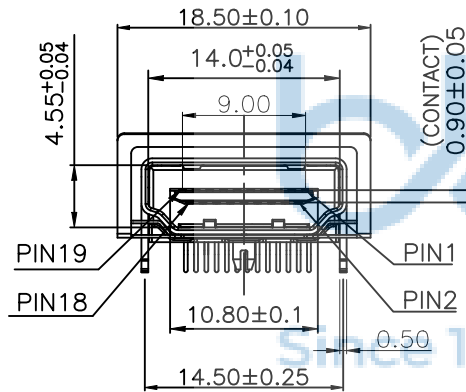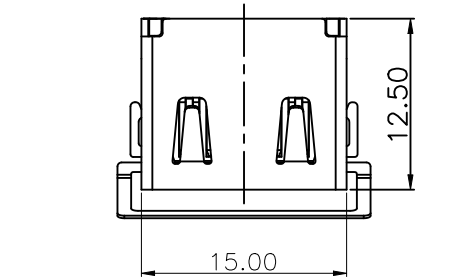


E	SPRING	1	SUS304 T=0.20
D	SHELL	1	C2680R-H Ni 50u" T=0.5mm PLATING ALL OVER
C	TERMINAL	19	C2680R-H, T=0.2mm.
B	COVER	1	LCP E130i UL94V-0 BLACK
A	HOUSING	1	LCP E130i UL94V-0 BLACK
NO	PART NAME	QTY	MATERIAL PLATING & COLOR

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0873-1

深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3' X': ±2' X': ±1'	NAME: HDMI 19P A母 装E款弹片 四脚插四弹片 固定脚长2.2 平口 三排端子DIP 铜壳镀镍 带柱 L=12.50 盒装	
APPD. JM_Zheng	CHKD. LYX	PJ. NO.: 124-222-190001-J8G	
DR. SGF		SIZE: A4 DRW NO.:	
		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	

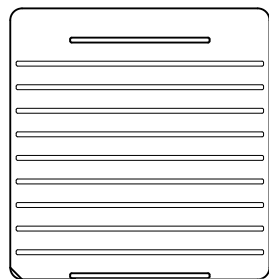


UP COVER





BOTTOM COVER

100PCS/TRAY



2800PCS/CTN

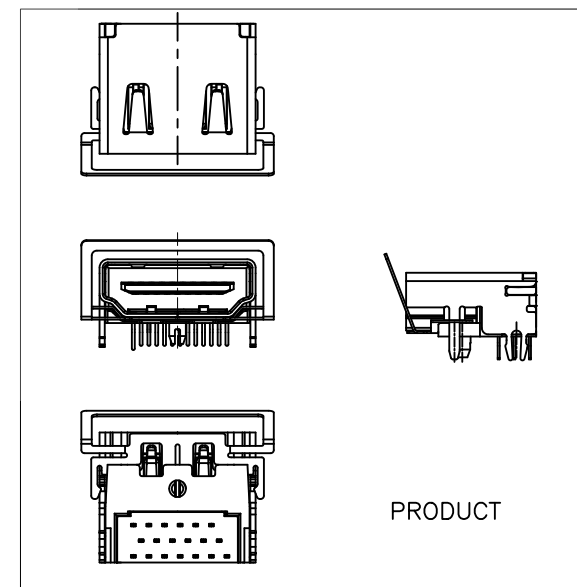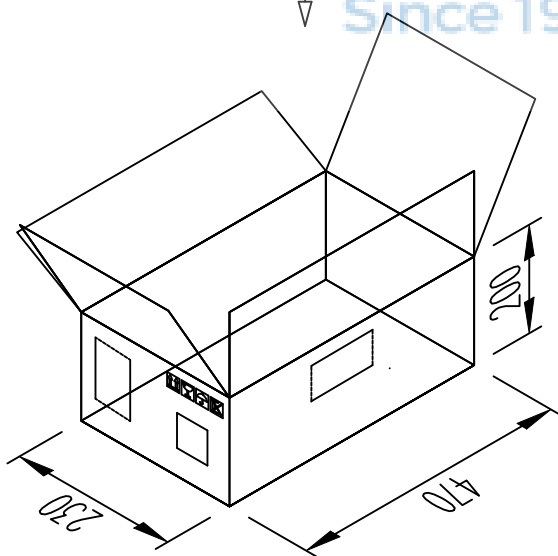

NOTE:

- 1.PACKING:100PCS/TRAY,2800PCS/CARTON.
- 2.CARTON SIZE: 470*230*200MM

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0873-1

深圳市步步精科技有限公司		NAME: HDMI 19P A母 装E款弹片 四脚插四弹片 固定脚长2.2 平口 三排端子DIP 铜壳镀镍 带柱 L=12.50 盒装	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3' .X': ±2' .XX': ±1'	P.J. NO.: 124-222-190001-J8G	
APPD. JM_Zheng	CHKD. LYX	SIZE: A4 DRW NO.:	
DR. SGF		FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2