

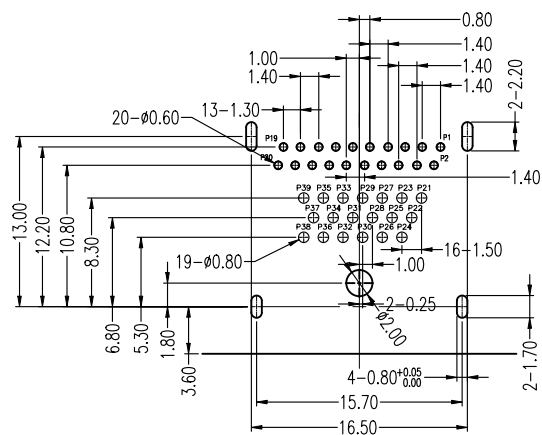

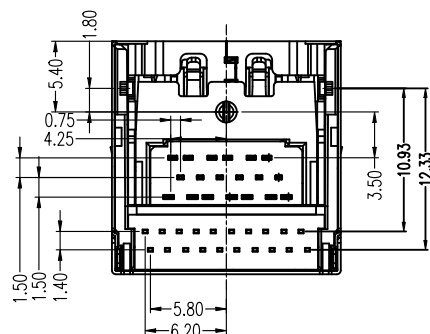
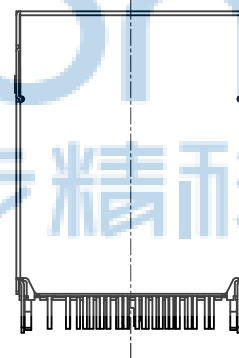


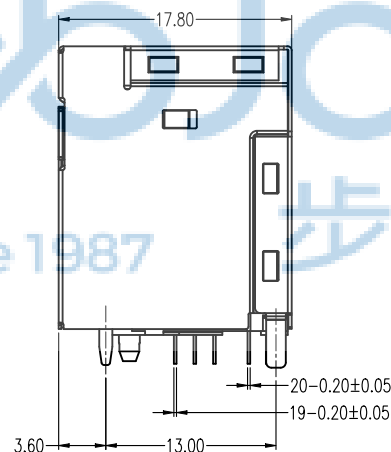

RECOMMENDED P.C.B. LAYOUT (COMPONENT SIDE VIEW)

TOL IS ± 0.05 THICKNESS=1.6 ALL POSITION TOL $\phi 0.06$ X Y

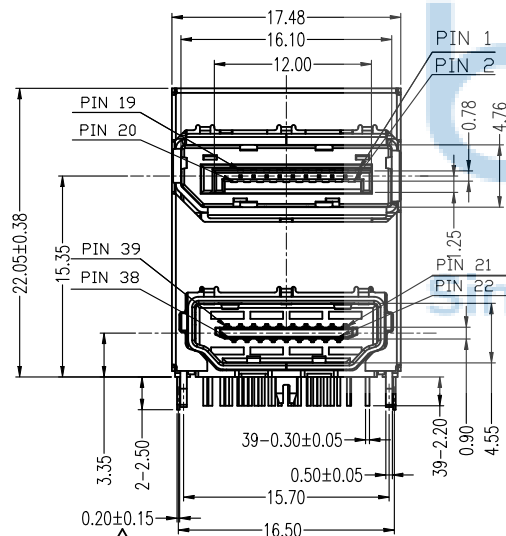

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

SPECIFICATIONS

1. Displayport
 - 1.1 Operation Voltage: 40 VAC(RMS) Max.
 - 1.2 Current Rating: 0.5 Ampere per Contact
 - 1.3 Contact Resistance: 30 Milliohms Max.
 - 1.4 Insulation Resistance: 100 Megohms Min.
 - 1.5 Dielectric Withstanding Voltage: 500 VAC(RMS)
 - 1.6 Total Mating Force: 4.0 Kgf Max.
 - 1.7 Total Unmating Force: 1.0 Kgf Min.
 - 1.8 Operating Temperature: -25°C to +85°C
2. HDMI
 - 2.1 Operation Voltage: 40 VAC(RMS) Max.
 - 2.2 Current Rating: 0.5 Ampere per Contact
 - 2.3 Contact Resistance: 10 Milliohms .
(Initial,Target design value).
 - 2.4 Insulation Resistance: 100 Megohms Min.
 - 2.5 Dielectric Withstanding Voltage: 500 VAC(RMS)
 - 2.6 Total Mating Force: 4.0 Kgf Max.
 - 2.7 Total Unmating Force: 1.0 Kgf Min.
 - 2.8 Operating Temperature: -25°C to +85°C

NOTES

1. MATERIAL:
Housing(Connecting seat):LCP E130I, UL 94V-0,
Color:Black.
Housing(DP):LCP E130I, UL 94V-0, Color:Black.
Housing(HDMI):LCP E130I, UL 94V-0, Color:Black.
Terminal:Brass C2680R-H T=0.20±0.02.
Shell(DP):SUS304 T=0.40±0.05
Shell(HDMI):Brass C2680R-H T=0.50±0.05.
Shield(FRONT):SUS304 T=0.20±0.02.
Shield(BACK):SUS201 T=0.25±0.02.
2. FINISH:
Terminal(DP):Selected Gold Plated G/F in Contact Area,
100u" MIN. Matte Tin Plated in Solder Area,
50u" MIN. Nickel Underplated Overall.
Terminal(HDMI):Selected Gold Plated G/F in Contact Area,
100u" MIN. Bright Tin Plated in Solder Area,
50u" MIN. Nickel Underplated Overall.
Shell(HDMI):Nickel Plated 50u" MIN.
Shield(FRONT):Weldable Nickel 50u" Plated All Over.
3. This Product is RoHs Compliance Product.

Remarks:

1. DP passes high frequency test 2.0
2. HDMI passes high frequency test 2.1




THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0873-1	 深圳市步步精科技有限公司	
	.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3° X'': ±2' XX': ±1'
	NAME: DP2.0+HDM12.1 A母 90度 双层 全包 DIP 端子镀金G-F 脚距15.70 有柱 平口 L=17.80	
	APPD. JM_Zheng	 PJ. NO.: 158-222-200001-J8G
	CHKD. LYX	SIZE: A4 DRW NO.:
	FINISH: SEE NOTES MAT'L.: SEE NOTES	
	SCALE: N/A REV.: A0	UNIT: mm PAGE: 1/2
DR. TSP		

紙箱1PCS

成品(50PCS/盒)
9*2=18盒

紙板1PCS

紙板1PCS

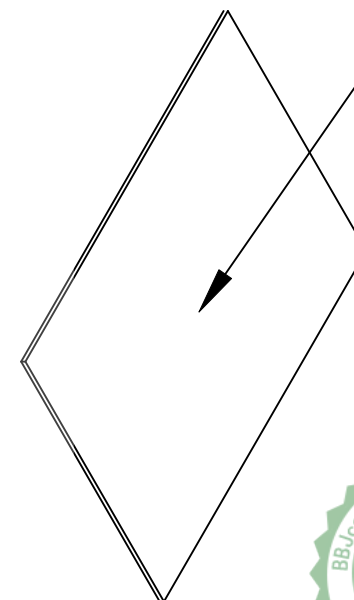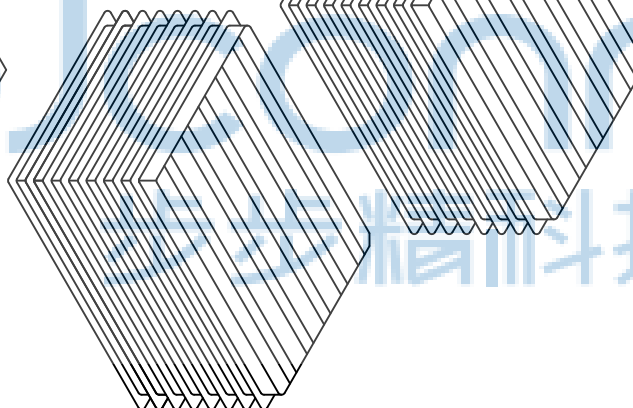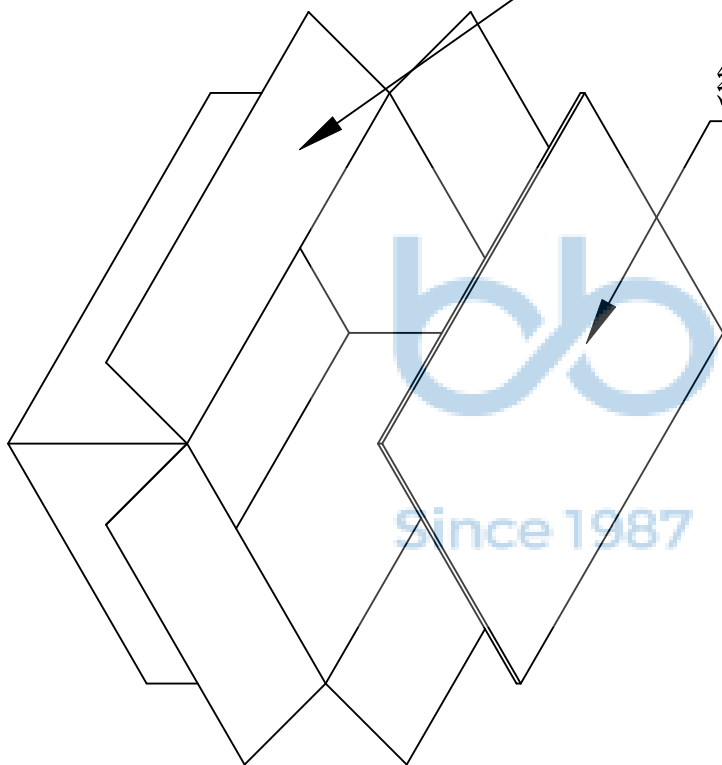

加厚紙箱:45*31*22.5CM

X.XX	X.XX	50*18=900
N.W:(KG)	G.W:(KG)	QT'Y(PCS)

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38	X*: ±3"	NAME: DP2.0+HDMI2.1 A母 90度 双层 全包 DIP	
.XX: ±0.25	.X*: ±2"	端子镀金G-F 脚距15.70 有柱 平口 L=17.80	
.XXX: ±0.13	.XX*: ±1"		
APPD.	JM_Zheng	PJ. NO.: 158-222-200001-J8G	
CHKD.	LYX	SIZE: A4 DRW NO.:	
PDWG.NO:	0873-1	FINISH: SEE NOTES MAT'L.: SEE NOTES	
DR.	TSP	SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	