

REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

NOTE:
 1.MATERIAL AND FINISH SEE THE TABLE.
 2.MECHANICAL CHARACTERISTICS
 INSERTION FORCE: 44.1N MAX
 EXTROCTION FORCE: 9.8N MIN, 39.2N MAX
 MATING CYCLE:10000 CYCLES
 3.ELECTRICAL CHARACTERISTICS
 RATING CURRENT: 0.5A
 RATING VOLTAGE: 40V
 CONTACT RESISTANCE: 10 MILLOHMS OHMS MAX
 (EXCLDUING CONDUCTOR RESISTANCE)
 INSULATION RESISTANCE:
 a, UNMATED: 100M OHMS MIN AT 500 VDC
 b, MATED: 10M OHMS MIN AT 150 VDC
 DIELECTRIC WITHSTANDING VOLTAGE:
 500V AC/1MINUTE
 OPERATING TEPERATURE: -20°C--+85°C
 STORAGE TEMPERATURE: -20°C--+65°C







MATERIAL LIST:

3	SHELL	1	C2680 T=0.50	NICKEL PLATED
2	TERMINAL	19	C2680 T=0.20	AU
1	HOUSING	1	LCP BLACK	(UL94V-0)
No.	PART NAME	QTY	MATERIAL	REMARK


THIS DOCUMENT IS THE
 SOLE PROPERTY OF
 BBJconn Technology Co.,Ltd.
 Corporation AND SHOULD
 NOT BE USED IN WHOLE
 PRIOR WRITTEN PERMISSION.


深圳市步步精科技有限公司

.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3' .X': ±2' .XX': ±1'	NAME: HDMI 1.4版 19P A型 母座 四脚插 L=10.3 H=9.2 端子SMT 铜壳 LCP黑胶 镀金GF 编带
APPD JM_Zheng	SIZE:A4	PJ NO: 124-221-190008-J8G
CHKD LYX	DRW NO:	
PDWG NO: 0873-1	DR SGF	FINISH:SEE NOTES SCALE:N/A
		MAT'L:SEE NOTES REV:A0
		UNIT:mm
		PAGE:1/2

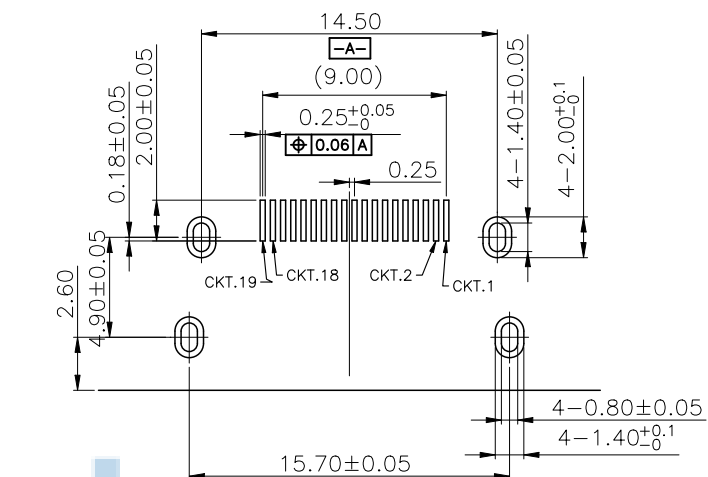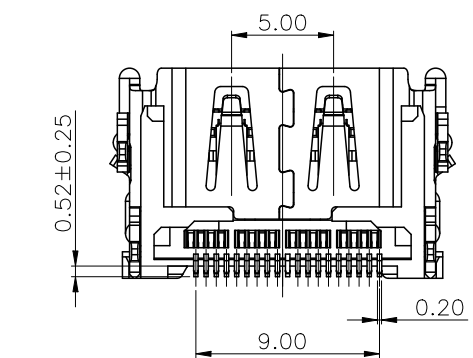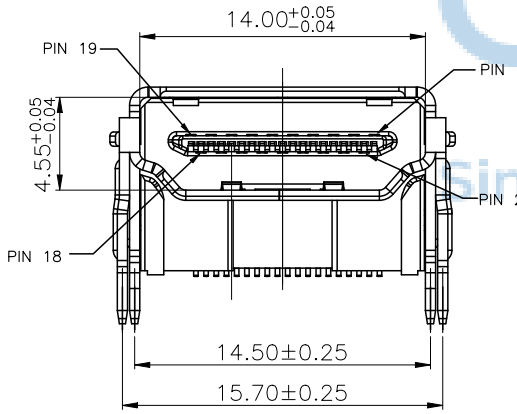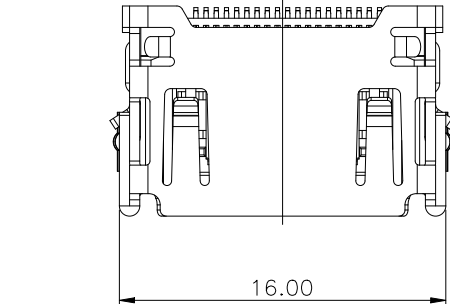


RECOMMENDED PCB LAYOUT
 CONNECTOR SIDE
 TOP VIEW

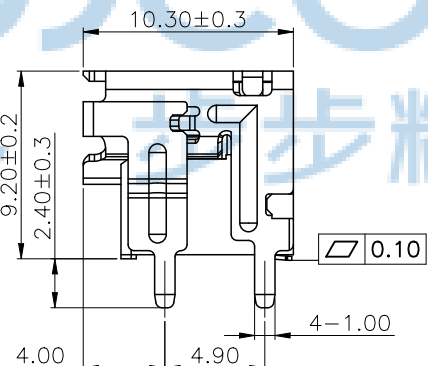

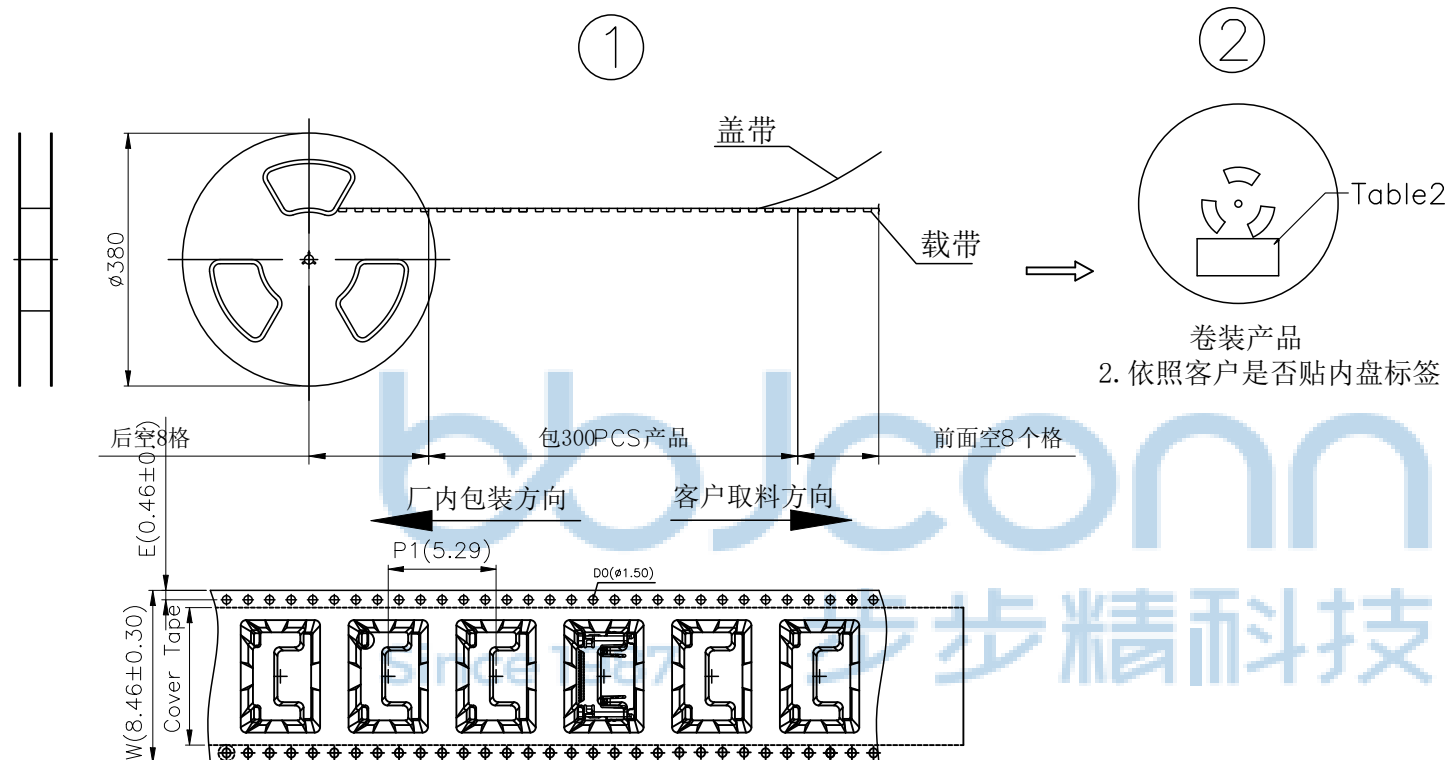

1. 按图包装，前、后各空格8PCS, 300PCS/REEL

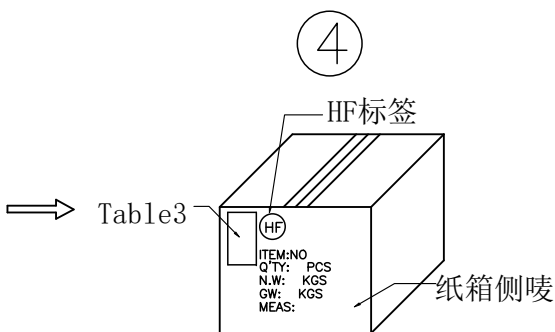

- 4-1 纸箱开口处以透明胶带贴合。
4-2 若有未装满的零数箱，必须以缓冲材塞
4-3 依照客户要求贴标签。



- 3-1. 将8卷装入PE胶袋，再放入纸箱中。
3-2. 纸箱4个角落用缓冲材料塞好，并盖上与之相配的纸板。
备注：纸箱的规格：400*400*310mm

3-3. 包装明细：

卷/每箱	PCS/每卷	PCS/每箱
8卷/每箱	300PCS/每卷	2400PCS/每箱

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0873-1

深圳市步步精科技有限公司

.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" X'': ±2" .X'X': ±1"		NAME: HDMI 1.4版 19P A型 母座 四脚插 L=10.3 H=9.2 端子SMT 铜壳 LCP黑胶 镀金GF 编带			
APPD	JM_Zheng				PJ NO: 124-221-190008-J8G		
CHKD	LYX				SIZE:A4	DRW NO:	
DR	SGF				FINISH:SEE NOTES		MAT'L:SEE NOTES
					SCALE:N/A	REV:A0	UNIT:mm