

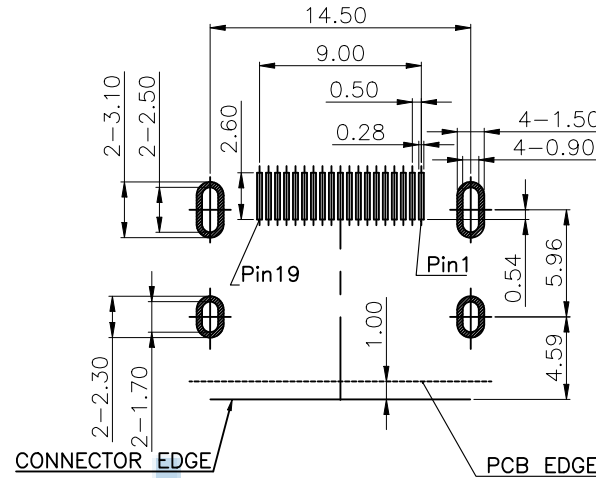

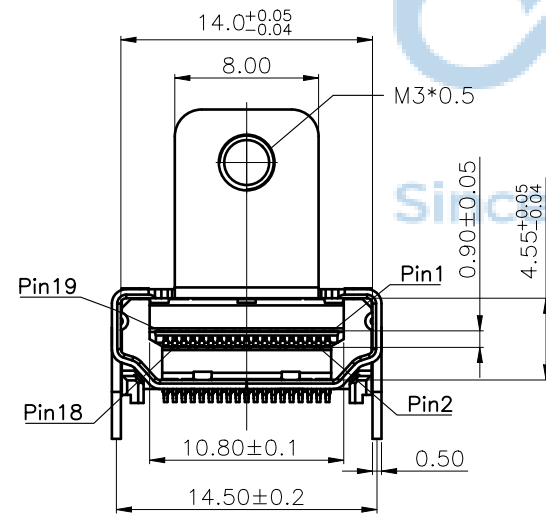


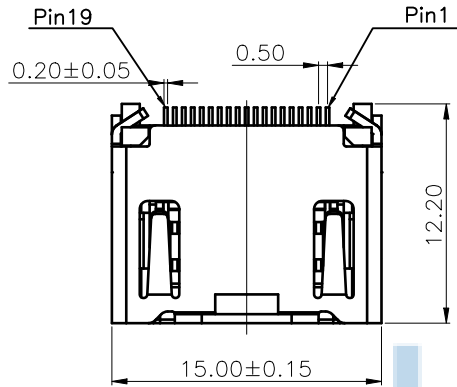

RECOMMENDED PCB LAYOUT (TOP VIEW)
TOLERANCE: $\pm 0.05\text{mm}$

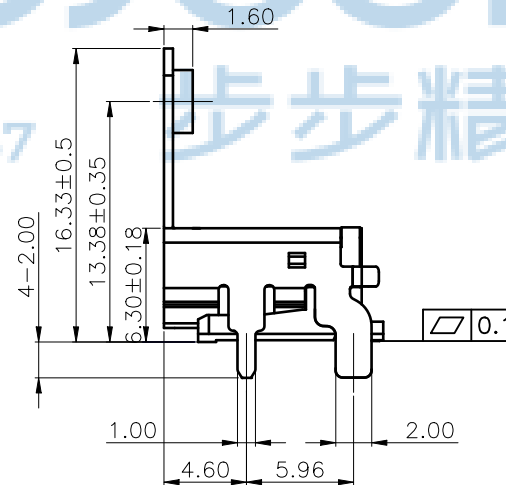

REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS

- 1-1. CURRENT RATING: 0.5 AMP
- 1-2. VOLTAGE RATING: 40 V
- 1-3. CONTACT RESISTANCE: 30MILLIOHMS MAX
- 1-4. INSULATION RESISTANCE: 100M MIN. @ 500V DC
- 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE

2. MECHANICAL CHARACTERISTICS:

- 2-1. INSERTION FORCE : 4.5KGF MAX.
- 2-2. WITHDRAWING FORCE : 1KGF ~ 4KGF.

3. LIFE TEST: 10000 CYCLES

4. OPERATING TEMPERATURE: -25°C TO $+85^{\circ}\text{C}$



C	SHELL	1	C2680R-H Ni 50u"Min T=0.5mm PLATING ALL OVER
B	TERMINAL	19	C2680R-H
A	HOUSING	1	LCP E130i UL94V-0 BLACK
NO	PART NAME	QTY	MATERIAL PLATING & COLOR

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0873-1

深圳市步步精科技有限公司

.X: ± 0.38 X': $\pm 3'$
.XX: ± 0.25 X'': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$


APPD JM_Zheng
CHKD LYX

DR SGF


NAME: HDMI 2.1版 A型 母座 四脚插脚长2.0
L=12.2 端子SMT 带螺孔高13.38 铜壳 盒装

PJ NO: 124-221-190009-J8G
SIZE: A4 DRW NO:

FINISH: SEE NOTES MAT'L: SEE NOTES
SCALE: N/A REV: A0 UNIT: mm PAGE: 1/2

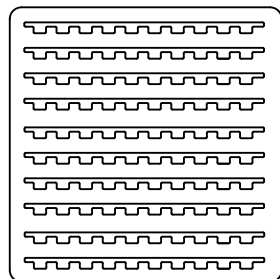


UP COVER


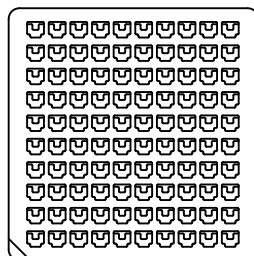


BOTTOM COVER

100PCS/TRAY



2000PCS/CTN

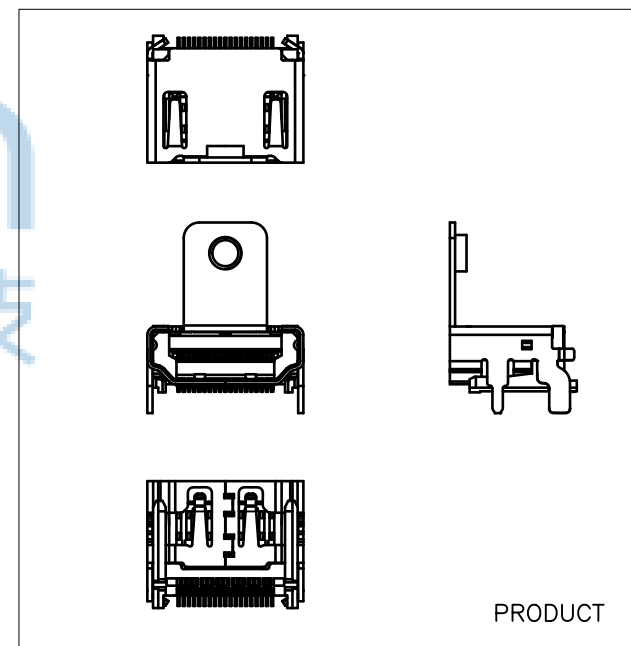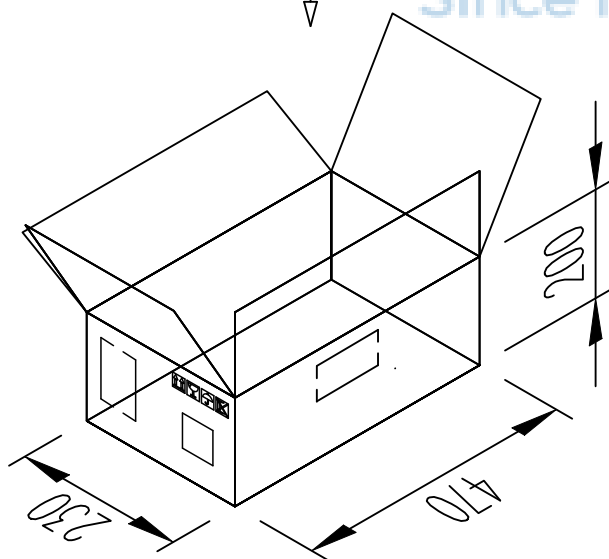

NOTE:

- 1.PACKING:100PCS/TRAY,2000PCS/CARTON.
- 2.CARTON SIZE: 470*230*200MM

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0873-1

深圳市步步精科技有限公司

.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13	X': $\pm 3'$.X': $\pm 2'$.XX': $\pm 1'$	NAME: HDMI 2.1版 A型 母座 四脚插脚长2.0 L=12.2 端子SMT 带螺孔高13.38 铜壳 盒装	
APPD	JM_Zheng		PJ NO: 124-221-190009-J8G
CHKD	LYX	SIZE:A4	DRW NO:
DR	SGF	FINISH:SEE NOTES	MAT'L:SEE NOTES
		SCALE:N/A	REV:A0
		UNIT:mm	PAGE:2/2