

REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

NOTE :

1.SPECIFICATION:


- 1.1.CURRENT RATING: 0.5 Amp Max.
- 1.2.VOLTAGE RATING: 40 V ac(r.m.s) Max.
- 1.3.CONTACT RESISTANCE: 10m ohms Max.mated
- 1.4.INSULATION RESISTANCE:100M ohms Min.
- 1.5.DIELECTRIC WITHSTANDING VOLTAGE:
AC 500V Min. (for 1 minute)
- 1.6.OPERATION TEMPERATURE RANGE:-25°C~85°C
- 2.MECHANICAL
- 2.1 INSERTION FORCE:4.5KGF MAXMUM
- 2.1 WITHDRAWAL FORCE:1.0KGF MINIMUM;4.0KGF MAXMUM

RECOMMENDED PCB LAYOUT
(THICKNESS=1.60±0.05mm)





5	10PIN TERMINAL	C1591 T=0.2	10	SEE P/N
4	9PIN TERMINAL		9	SEE P/N
3	SHELL	SPCC OR H65	1	SEE P/N
2	BACK INSERT HOUSING	LCP BLACK	1	UL94V-0
1	HOUSING	LCP BLACK	1	UL94V-0
NO.	PART NAME	MATFRIAL	QT,Y	RFMARK

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION. PDWG NO: 0873-1			深圳市步步精科技有限公司			
	.X: ±0.38 X*: ±3* .XX: ±0.25 .X*: ±2* .XXX: ±0.13 .XX*: ±1*		NAME: HDMI 19P A型 公头 夹板1.6 H=12.5 有筋 铁壳 LCP黑胶 镀金GF 带塞子 盒装			
	APPD	JM_Zheng			PJ NO: 124-125-190002-J8G	
	CHKD	LYX			SIZE:A4	DRW NO:
				FINISH:SEE NOTES		MAT'L:SEE NOTES
			SCALE:N/A	REV:A0	UNIT:mm	PAGE:1/2

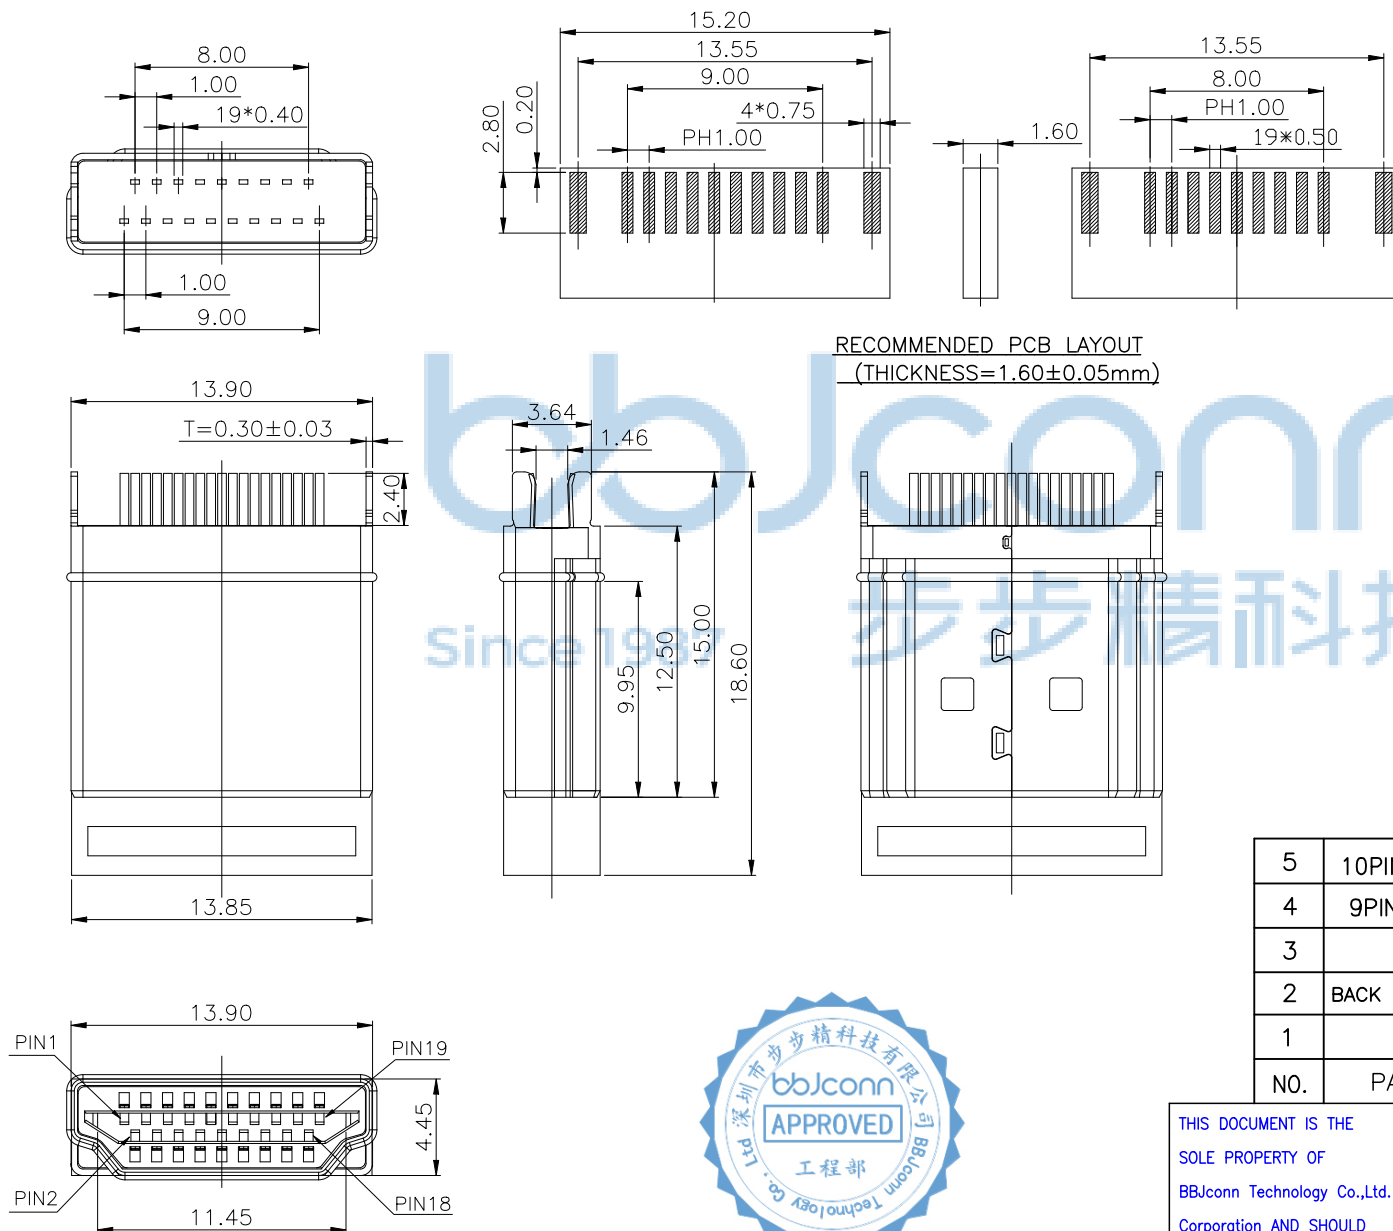

REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

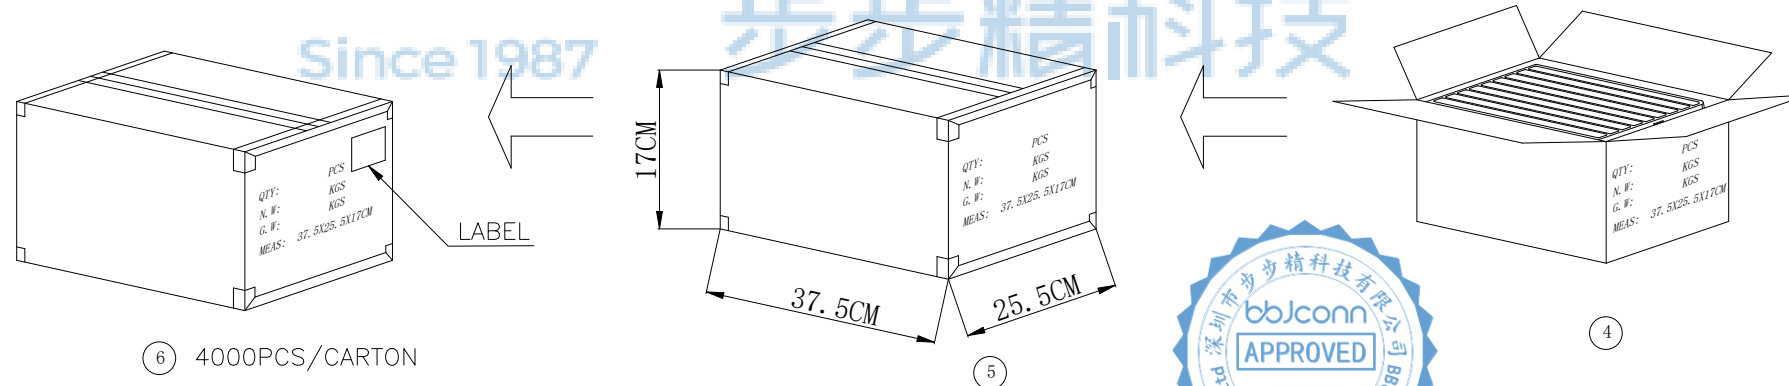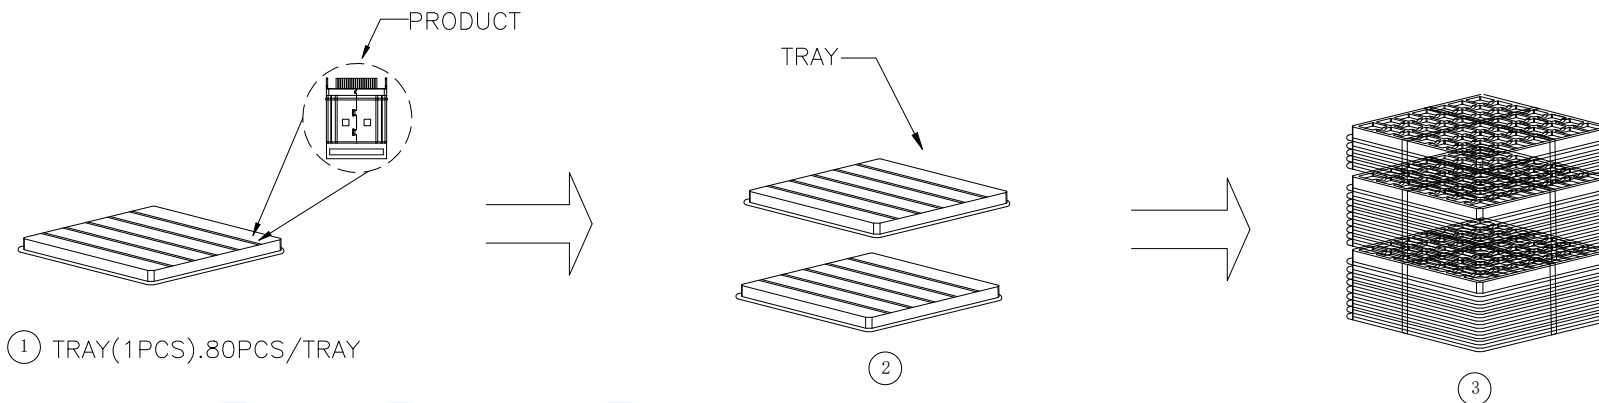

	TRAY	CARTON
CONNECTOR (PCS)	80PCS	4000PCS



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

深圳市步步精科技有限公司			
.X: ±0.38	X': ±3'	NAME: HDMI 19P A型 公头 夹板1.6 H=12.5 有筋 铁壳 LCP黑胶 镀金GF 带塞子 盒装	
.XX: ±0.25	.X': ±2'		
.XXX: ±0.13	.XX': ±1'		
APPD	JM_Zheng	PJ NO: 124-125-190002-J8G	
CHKD	LYX	SIZE:A4 DRW NO:	
PDWG NO: 0873-1		FINISH:SEE NOTES	MAT'L:SEE NOTES
DR	SGF	SCALE:N/A	UNIT:mm
		REV:A0	PAGE:2/2