

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF






SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS

- 1-1. CURRENT RATING: 0.5 AMP
- 1-2. VOLTAGE RATING: 40 V
- 1-3. CONTACT RESISTANCE: 30MILLIOHMS MAX
- 1-4. INSULATION RESISTANCE: 100M MIN. @500V DC
- 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE

2. MECHANICAL CHARACTERISTICS:





- 2-1. INSERTION FORCE : 4.5KGF MAX.
 - 2-2. WITHDRAWING FORCE : 1KGF ~ 4KGF.
3. LIFE TEST: 10000 CYCLES
4. OPERATING TEMPERATURE: -25° C TO +85° C

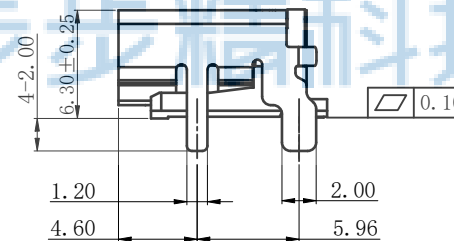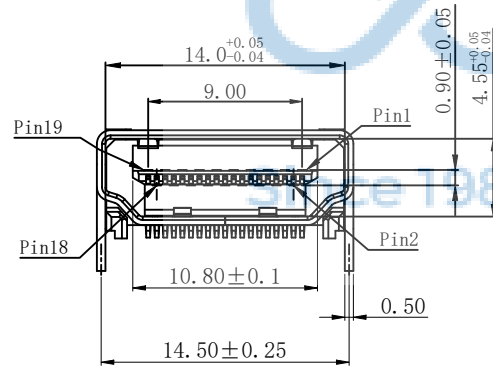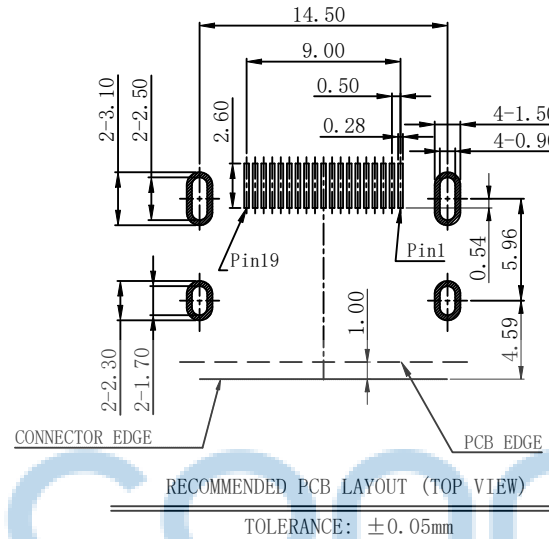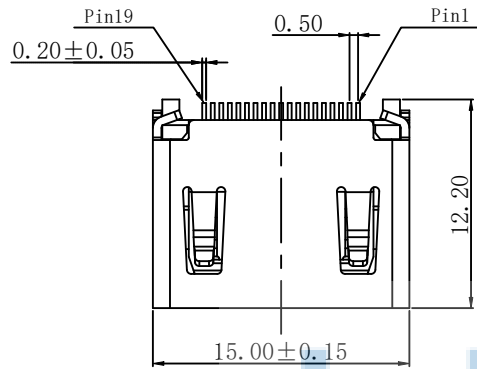

C	SHELL	1	C2680R-H Ni 50u"Min T=0.5mm PLATING ALL OVER
B	TERMINAL	19	C2680R-H SEE PART NO.
A	HOUSING	1	LCP E130i UL94V-0 BLACK
NO	PART NAME	QTY	MATERIAL PLATING & COLOR

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0873-1

深圳市步步精科技有限公司		NAME: HDMI 19P 母座 MD式 四脚DIP 端子SMT 脚长2.0 平口 铜壳镀镍 无柱 L=12.20 脚距14.5 编带	
APPD.	JM_Zheng	P.J. NO.: 124-222-190005-J8G	
CHKD.	LYX	SIZE: A4 DRW NO.:	
DR.	SGF	FINISH: SEE NOTES MAT' L.: SEE NOTES	
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2

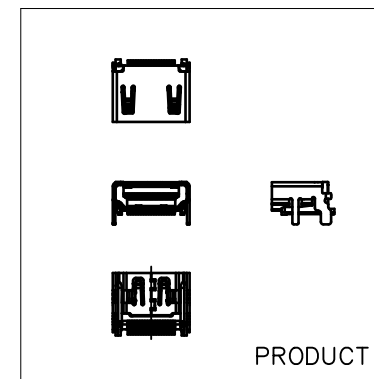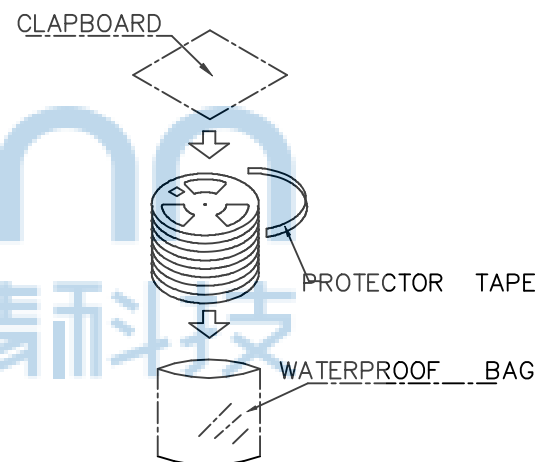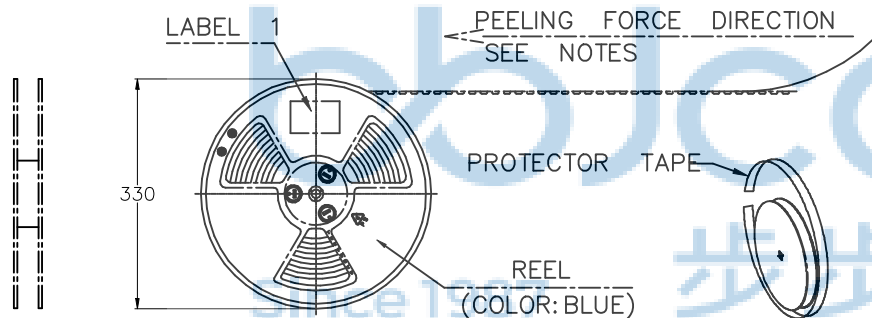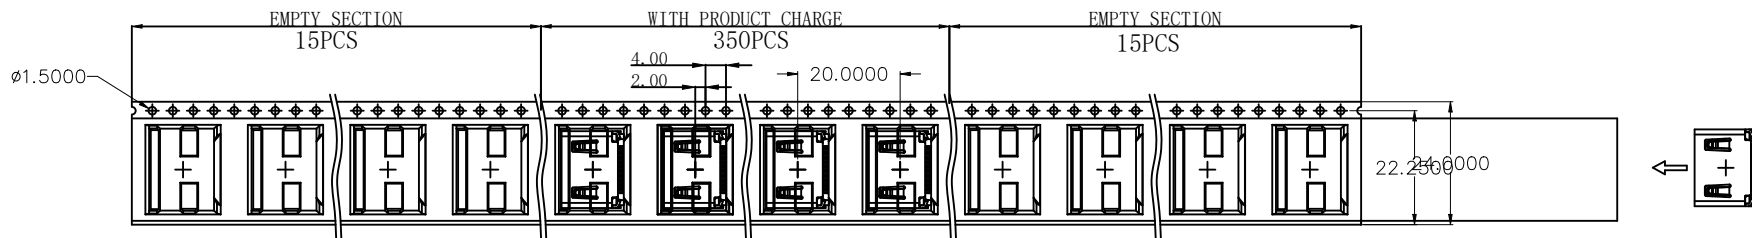

NOTES:

1. DIMNSION:

CARTON: 345*345*315mm,K=K. (1PCS)

EDGE BOARD: 340*310mm (4PCS)


CLAPBOARD: 330*330mm (2PCS)

2. QUANTITY:

350 PCS/REEL

10 REELS/SHIPPING CARTON

3500 PCS/SHIPPING CARTON

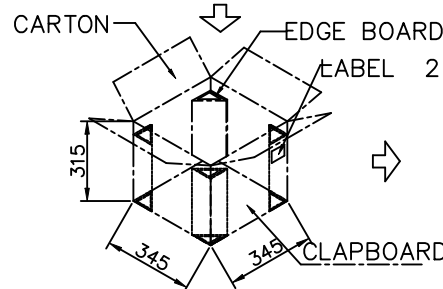

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0873-1

深圳市步步精科技有限公司		NAME: HDMI 19P 母座 MD式 四脚DIP 端子SMT 脚长2.0 平口 铜壳镀镍 无柱 L=12.20 脚距14.5 编带	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X°: ±3° X°: ±2° XX°: ±1°	APPD. JM_Zheng CHKD. LYX DR. SGF	P.J. NO.: 124-222-190005-J8G SIZE: A4 DRW NO.: FINISH: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm
		MAT' L.: SEE NOTES PAGE: 2/2	