

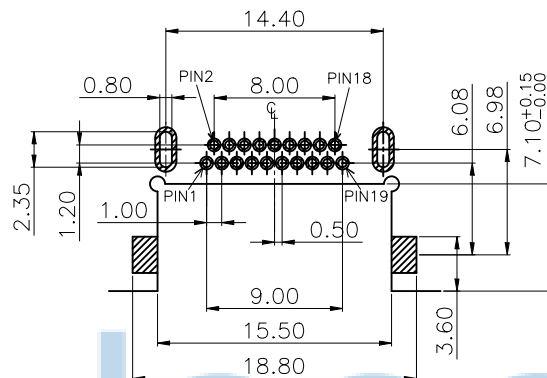

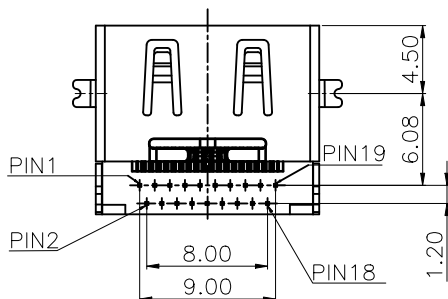


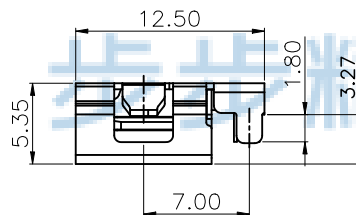

RECOMMENDED PCB LAYOUT(TOP VIEW)
(THICKNESS=1.4±0.10mm)
(TOLERANCE=±0.03mm)

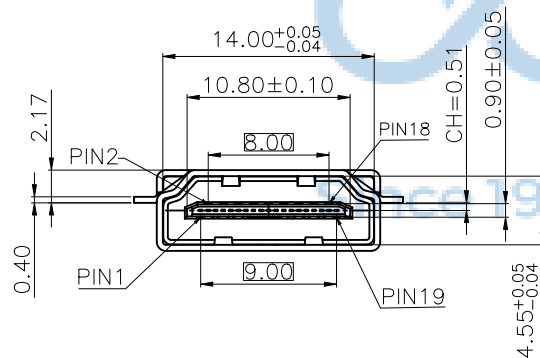

规格说明:Specifications:

电气特性:Electrical:

- 额定电流: Current Rating
0.5A/contact terminal
- 额定电压: Voltage Rating
40V DC
- 接触阻抗: Contact Resistance
30 mΩ MAX
- 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 绝缘阻抗: Insulation Resistance:
100MΩ MIN
- 工作温度: Operating Temperature: -25° C~+85° C.

物理性能: Mechanical:

- 插拔力: Connector Mate and Unmate Force
Mate force: 4.5KGF MAX
Unmate force: 1KGF ~ 4KGF
- 耐久性: Durability: 10000 Cycles

序号	产品名称	材料规格	表面处理/颜色	数量
1	外壳	黄铜	镀镍	1
2	端子	黄铜	镀锡	19
3	胶芯	LCP	黑色	1

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO:0873-1



深圳市步步精科技有限公司

.X: ±0.38 X': ±3'
.XX: ±0.25 X': ±2'
.XXX: ±0.13 .XX': ±1'

APPD JM_Zheng

CHKD LYX

DR SGF

NAME:HDMI 19P 母座 前贴后插 反向沉板3.27 平口
无柱 铜壳 L=12.5 CH=0.5 针长1.80 编带

PJ NO: 124-222-190006-J8G



SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES

SCALE:N/A REV:A0 UNIT:mm PAGE:1/2

EMPTY SECTION

WITH PRODUCT CHARGE EMPTY SECTION

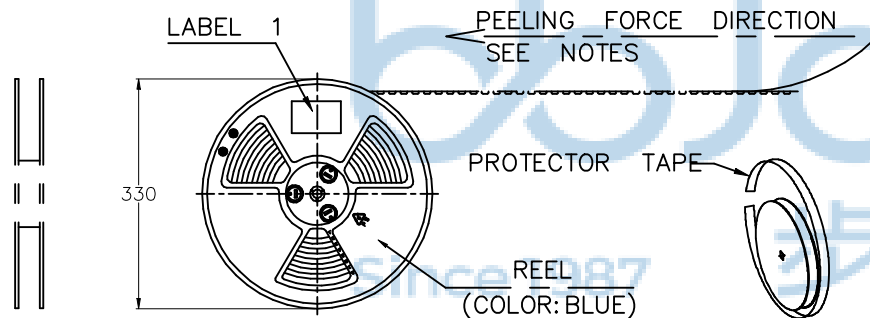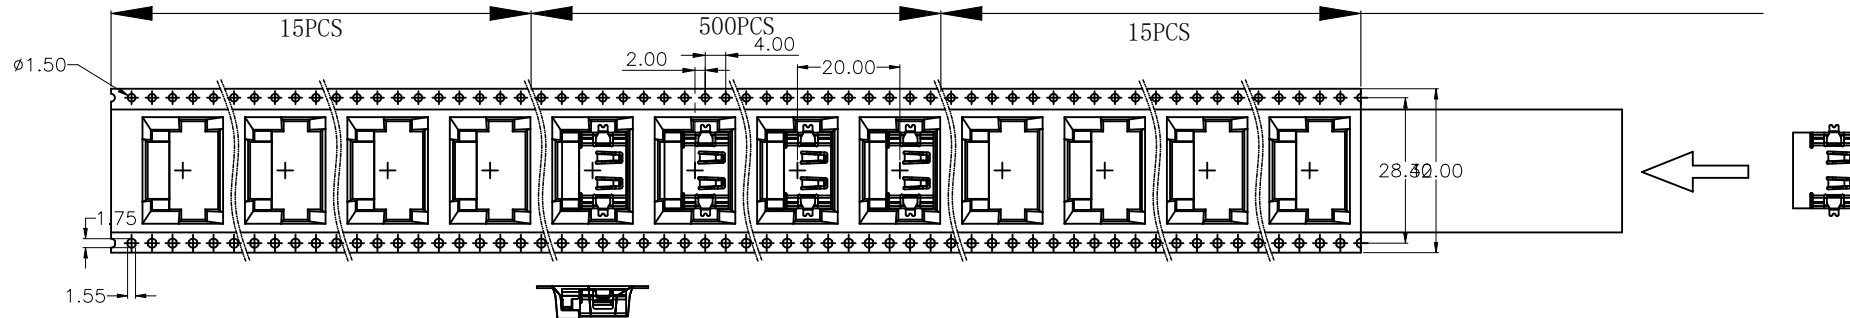

NOTES:

1. DIMNSION:

CARTON: 345*345*240mm,K=K. (1PCS)

EDGE BOARD: 340*310mm (4PCS)




CLAPBOARD: 330*330mm (2PCS)

2. QUANTITY:

500 PCS/REEL

6 REELS/SHIPPING CARTON

3000 PCS/SHIPPING CARTON

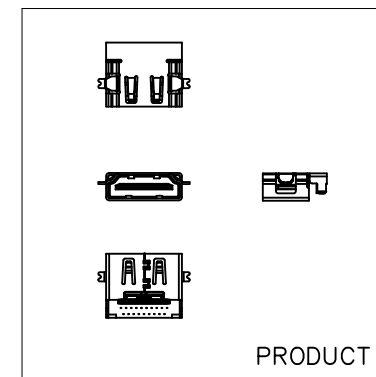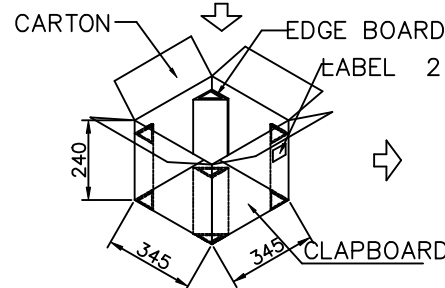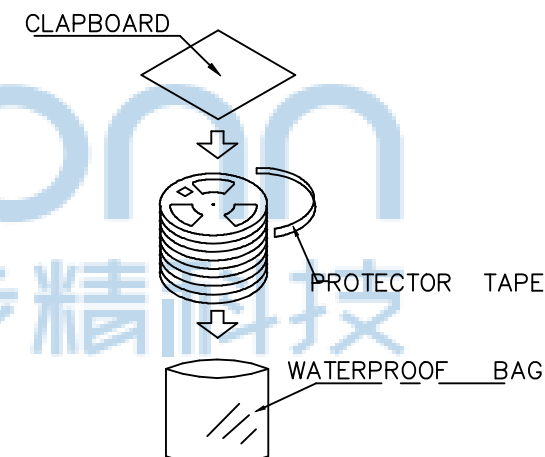

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO:0873-1



深圳市步步精科技有限公司

.X: ±0.38 .X': ±3'
.XX: ±0.25 .X'': ±2'
.XXX: ±0.13 .X''': ±1'

APPD JM_Zheng

CHKD LYX

DR

SGF

NAME:HDMI 19P 母座 前贴后插 反向沉板3.27 平口
无柱 铜壳 L=12.5 CH=0.5 针长1.80 编带

PJ NO: 124-222-190006-J8G

SIZE:A4 DRW NO:

FINISH:SEE NOTES

SCALE:N/A

REV:A0

UNIT:mm

PAGE:2/2

MAT'L:SEE NOTES