
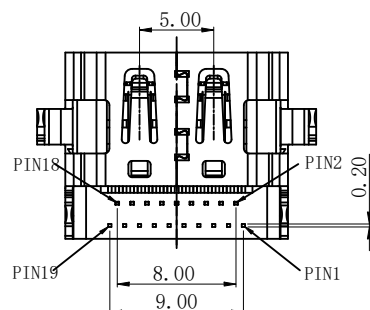

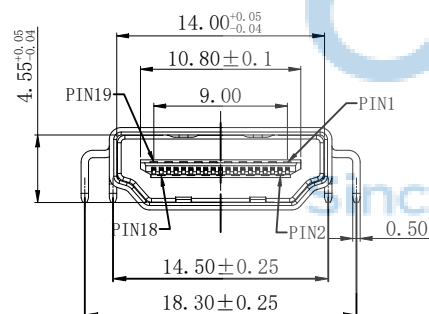
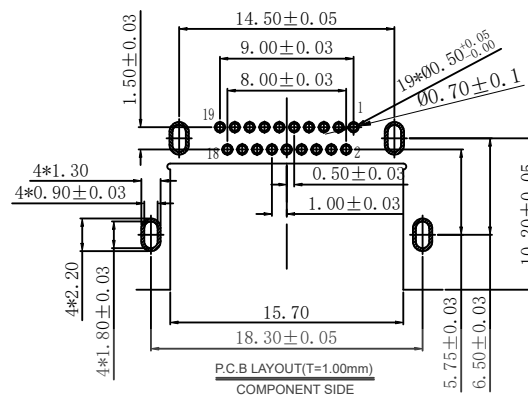


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF



SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS
 - CURRENT RATING: 0.5 AMP
 - VOLTAGE RATING: 40 V
 - CONTACT RESISTANCE: 30MILLIOHMS MAX
 - INSULATION RESISTANCE: 100M MIN. @500V DC
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE
- MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE : 4.5KGF MAX.
 - WITHDRAWING FORCE : 1KGF ~ 4KGF.
- LIFE TEST: 10000 CYCLES
- OPERATING TEMPERATURE: -25° C TO +85° C



C	SHELL	1	C2680R-H Ni T=0.5MM, 50u"MIN. NICEL ALL OVER
B	TERMINAL	19	C2680R-H SEE PART NO.
A	HOUSING	1	LCP E130i UL94V-0 BLACK
NO	PART NAME	QTY	MATERIAL PLATING & COLOR

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .X° :±3° .XX: ±0.25 .X° :±2° .XXX: ±0.13 .XX° :±1°		NAME: HDMI 19P 母座 四脚插 沉板1.95 平口 无柱 铜壳 L=12.55 编带	
APPD.	JM_Zheng	P.J. NO.: 124-222-190007-J8G	
CHKD.	LYX	SIZE: A4 DRW NO.:	
PDWG.NO:	0873-1	FINISH: SEE NOTES	MAT' L.: SEE NOTES
DR.		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2

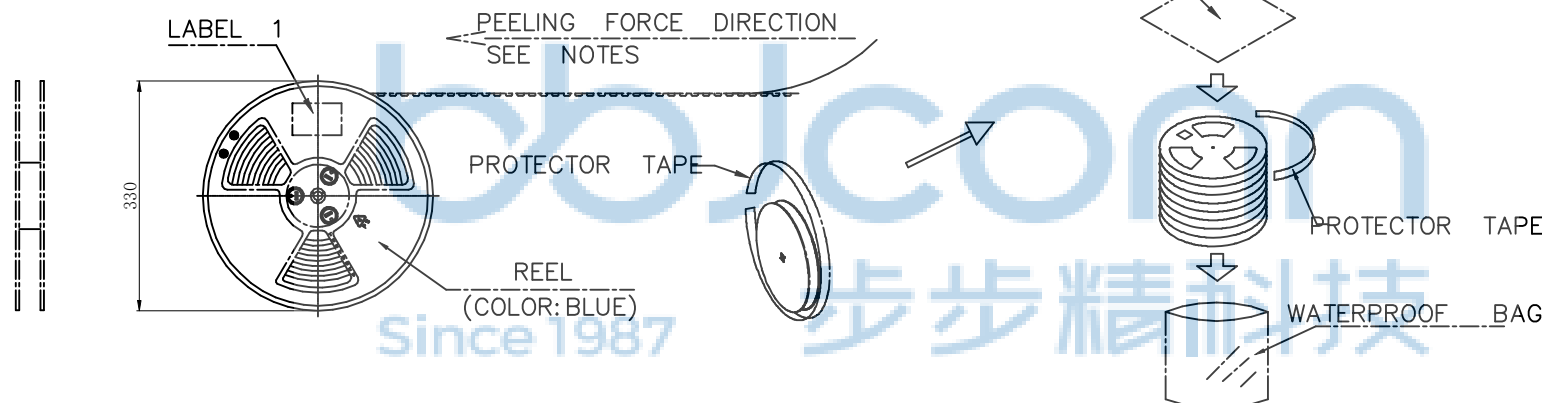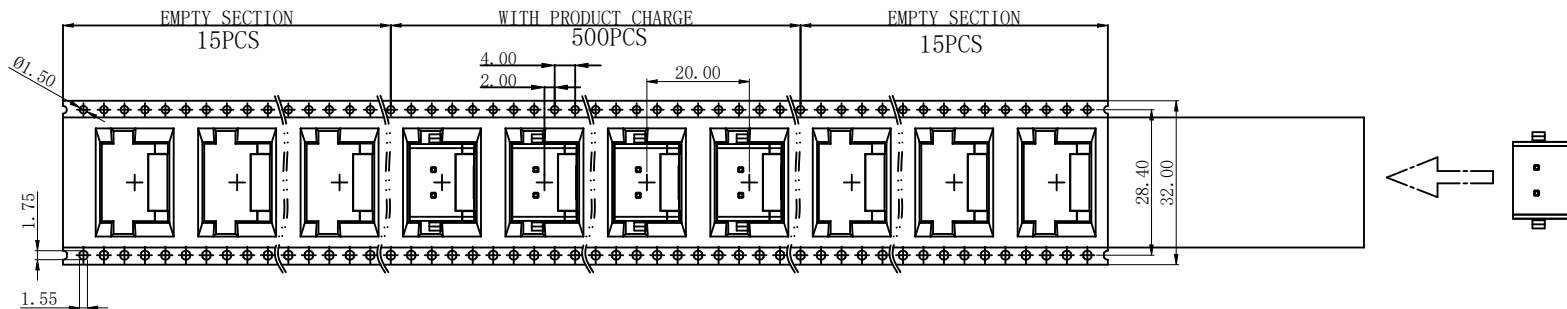

NOTES:

1. DIMNSION:

CARTON: 345*345*240mm,K=K. (1PCS)

EDGE BOARD: 340*310mm (4PCS)




CLAPBOARD: 330*330mm (2PCS)

2. QUANTITY:

500 PCS/REEL

6 REELS/SHIPPING CARTON

3000 PCS/SHIPPING CARTON

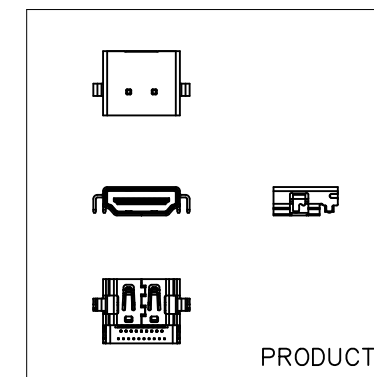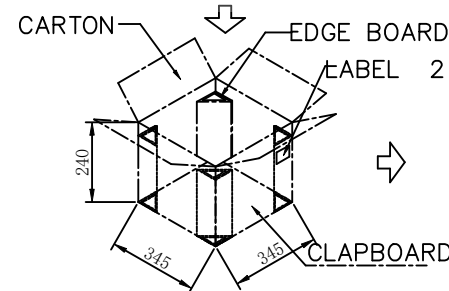

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0873-1

深圳市步步精科技有限公司

.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13 X°: $\pm 3^\circ$.X°: $\pm 2^\circ$.XX°: $\pm 1^\circ$

NAME: HDMI 19P 母座 四脚插 沉板1.95
平口 无柱 铜壳 L=12.55 编带

APPD. JM_Zheng

CHKD. LYX

DR. SGF

PJ. NO.: 124-222-190007-J8G

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT' L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2