

REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

NOTE:

MATERIALS:

1. Housing: LCP Color: Black
2. Contacts: Brass
3. Shell: Brass Or SPCC
4. Spring: Steel



PLATING:

1. Contacts: Gold Plated on Contact Area
Matte 80u" MIN: Sn Plated on Solderails
30u" MIN Nickel Under Plated Over All




2. Shell: 80u" MIN Nickel Plated

SPECIFICATIONS:

1. Rated current: 0.5A
2. Rated voltage: 40V AC (RMS)
3. Contact Impedance: 30mΩ Max
4. Insulation Impedance: 100MΩ Min
5. Withstand voltage: 500V DC
6. Insertion Force: 4.5kgf Max
7. Removal Force: 1.0~4.0kgf
8. Working temperature: -25°C ~ +85°C

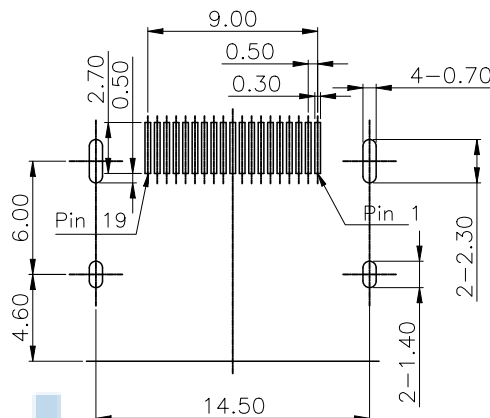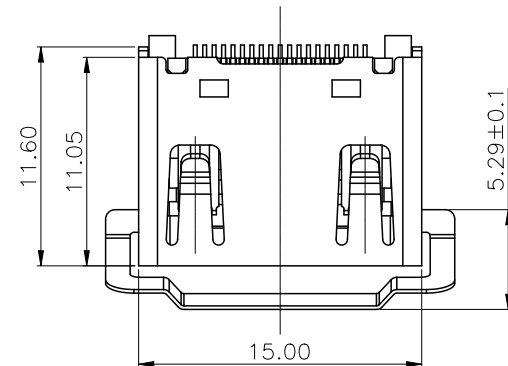

PCB LAYOUT

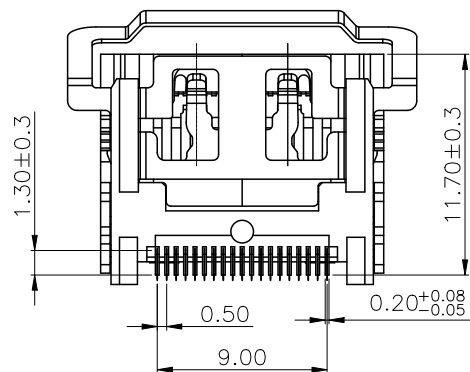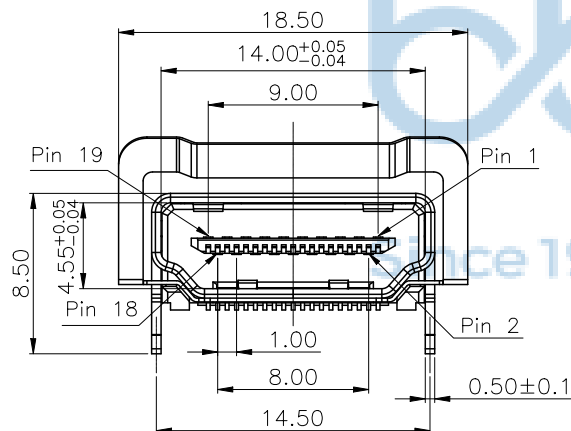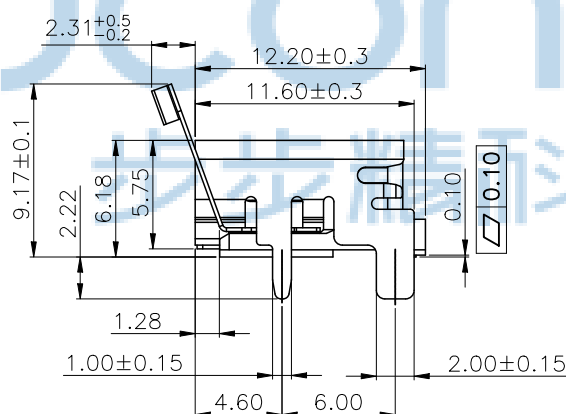

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0901-1

深圳市步步精科技有限公司

.X: ±0.38 X': ±3"
.XX: ±0.25 X'': ±2"
.XXX: ±0.13 .XX': ±1"

APPD JM_Zheng

CHKD LYX

DR SGF


NAME:HDMI 1.4版 19P 母座 90度 四脚插 端子SMT
L=12.2 带弹片 铁壳 LCP黑胶 镀金GF D款 编带

PJ NO: 124-221-190011-J8G



SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES


SCALE:N/A REV:A0 UNIT:mm PAGE:1/2

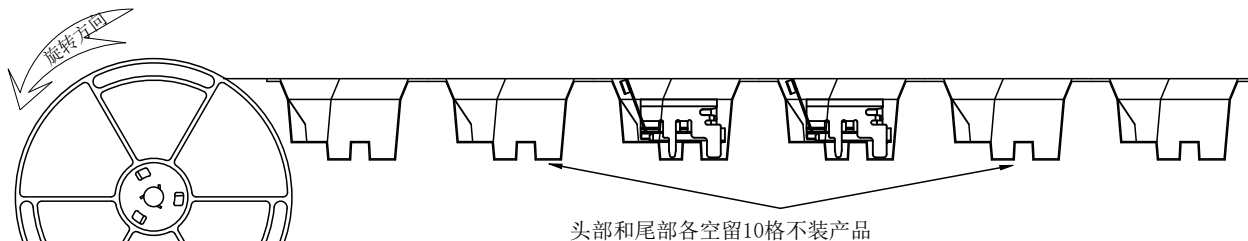


图示一
卷盘规格: $\phi 380 \times 35 \text{MM}$

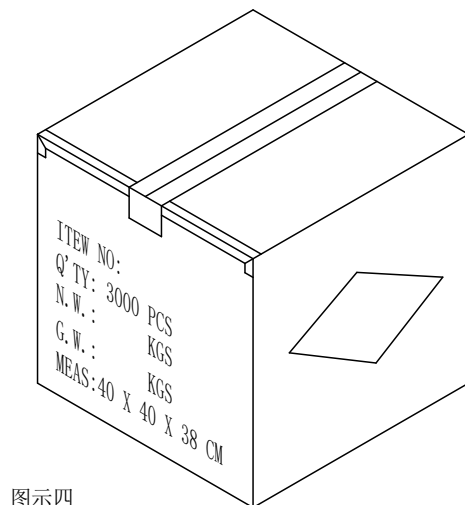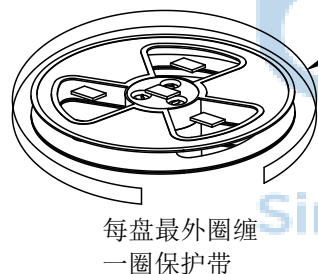

图示四
纸箱规格: $400 \times 400 \times 380$

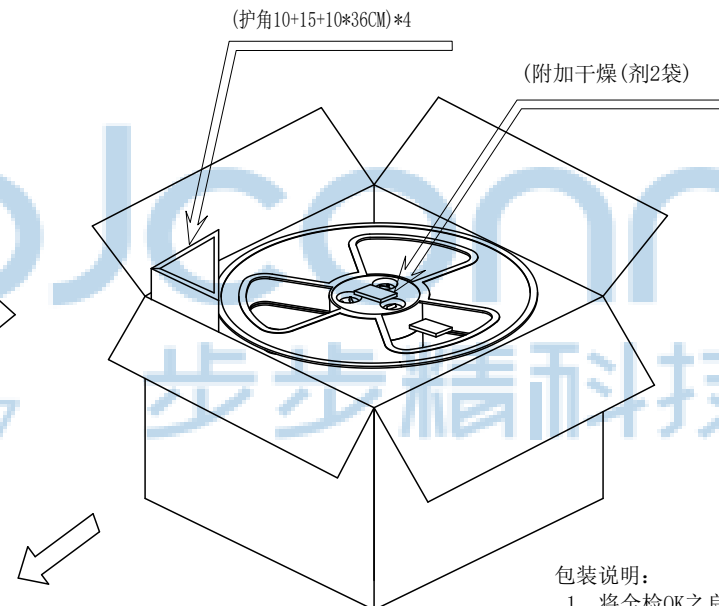

图示三
每盘装300PCS
每箱装3000PCS

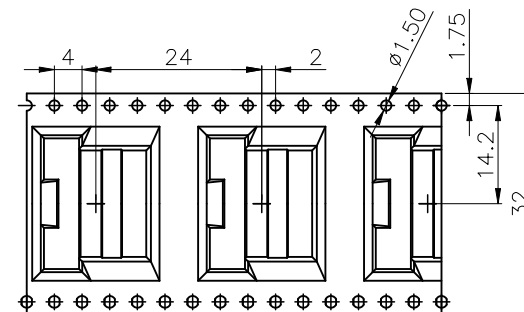

包装说明:

- 1、将全检OK之良品定位脚朝下放入卷带底盒槽内, 产品定位脚置于槽内台阶方向(如图示二), 每盘装300PCS;
注: 头部和尾部各空留10格不装产品
- 2、将纸箱打开折合好, 用透明大胶纸将纸箱底部中间处及两侧结合处封好, 将装满产品卷带盘放入纸箱内, 每箱装10盘, 在外箱的四个角置入三角形的护角, 再放两包干燥剂(如图示三),
- 3、尾数盘要求标明尾数盘标识, 尾数箱要用干燥物品填满, 再用封箱胶纸纸箱中间折合处及两侧折合处封好, 外箱要求标明尾数箱标识;
- 4、将产品标签贴(依客户要求);



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0901-1

深圳市步步精科技有限公司

.X: ± 0.38 .X': $\pm 3'$
.XX: ± 0.25 .X': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

APPD JM_Zheng
CHKD LYX

DR

NAME: HDMI 1.4版 19P 母座 90度 四脚插 端子SMT
L=12.2 带弹片 铁壳 LCP黑胶 镀金GF D款 编带

PJ NO: 124-221-190011-J8G
SIZE: A4 DRW NO:

FINISH: SEE NOTES MAT'L: SEE NOTES
SCALE: N/A REV: A0 UNIT: mm PAGE: 2/2