



NOTE:

1.MATERIAL:

- 1.1 TERMINAL: C2680 ,T=0.2±0.02MM
- 1.2 SHELL: C2680 ,T=0.4±0.02MM
- 1.3 HOUSING: LCP+30%.G.F.(UL94-0),BLACK,HF
- 1.4 CAP: LCP+30%.G.F.(UL94-0),BLACK,HF







2.PLATING:

- 2.1 CONTACT: CONTACT AREA GOLD PLATED, SOLDER AREA TIN(100u"MIN.) PLATED UNDER PLATED NICKEL(50u"MIN.)
- 2.2 SHELL: NICKEL(80u"MIN.) PLATED

3.SPECIFICATIONS:

- 3.1 CURRENT RATING: 0.5A MIN.
- 3.2 VOLTAGE RATING: 40V AC(RMS)
- 3.3 CONTACT RESISTANCE: CONTACT RESISTANCE EXCLUDING CONDUCTOR RESISTANCE: 10mΩ MAX.
- 3.4 DIELECTRIC WITHSTANDING VOLTAGE: 300V AC (MATED); 500V AC (UNMATED)
- 3.5 INSULATION RESISTANCE: 10MΩ MIN.(MATED); 100MΩ MIN.(UNMATED) AT 500V DC
- 3.6 INSERTION FORCE: 4.5KGF MAX
- 3.7 WITHDRAWAL FORCE: 1.0KGF~4.0KGF
- 3.8 DURABILITY: 10000 CYCLES
- 3.9 OPERATING TEMPERATURE: -25°C~+85°C
- 3.10 REFLOW SOLDERING(SMD COMPONENT) OVEN TEMPERATURE 260°C 5SEC.

REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

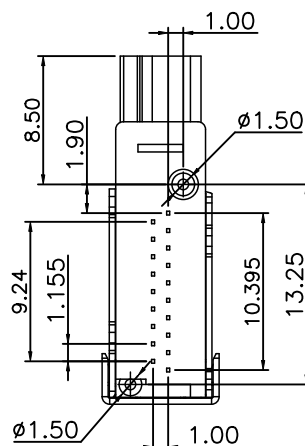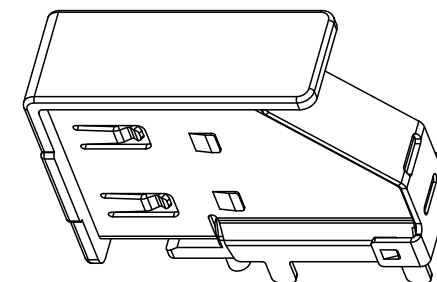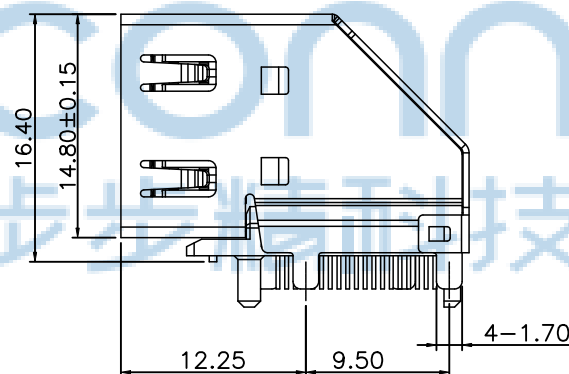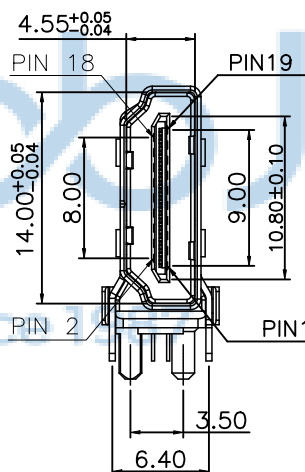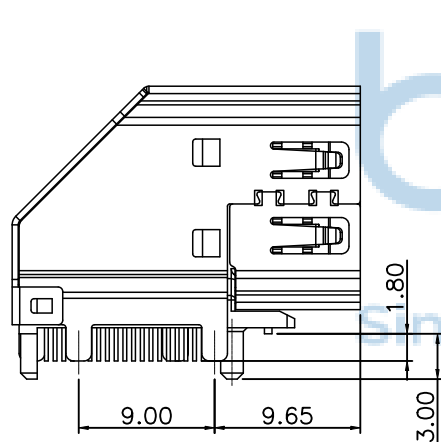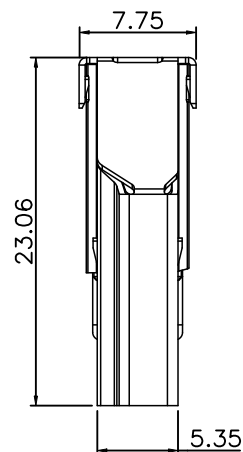

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0901-1

深圳市步步精科技有限公司

.X: ±0.38 .X': ±3"
.XX: ±0.25 .X': ±2"
.XXX: ±0.13 .XX': ±1"



APPD JM_Zheng
CHKD LYX

DR SGF

NAME: HDMI 2.1版 19P AF 侧插 L=23.06 四脚直插
带柱 针长1.8 DIP 平口 铜壳 带防尘盖 编带

PJ NO: 124-228-190001-J8G
SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES
SCALE:N/A REV:A0 UNIT:mm PAGE:1/3

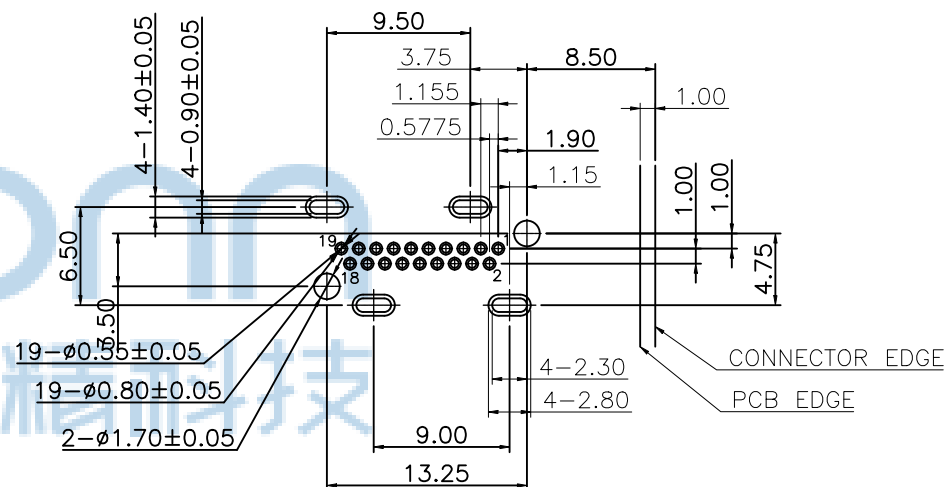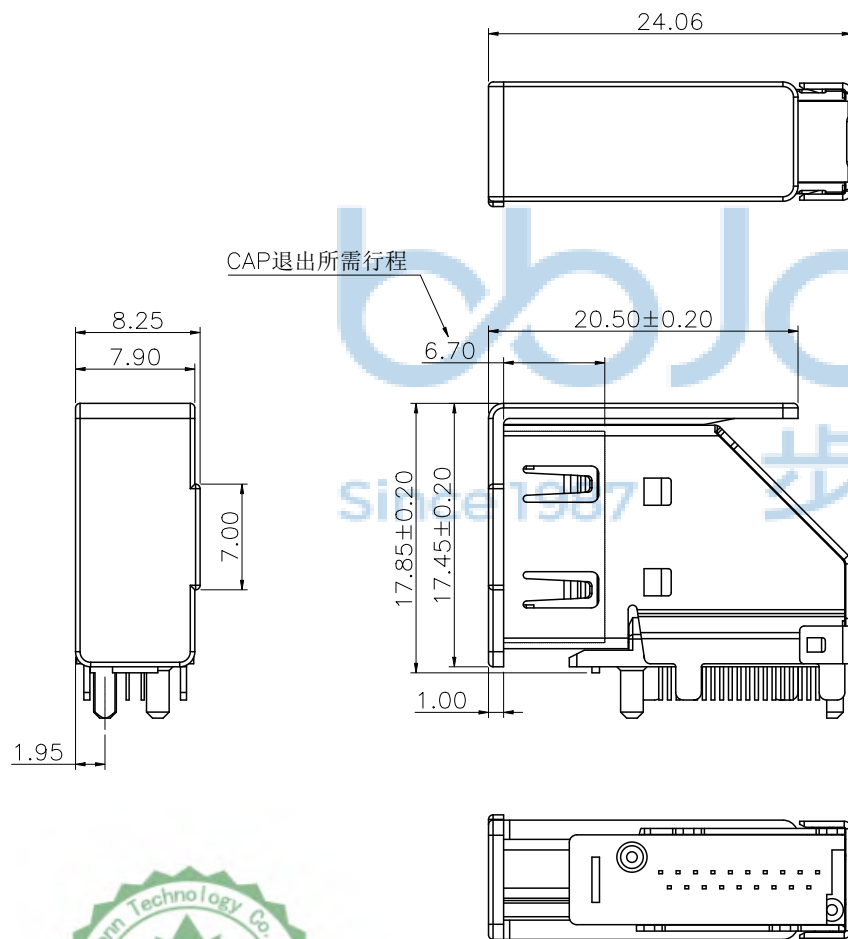

RECOMMENDED PCB LAYOUT (TOP VIEW)
THICKNESS=1.6±0.05mm
TOLERANCE: ±0.05mm



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0901-1

深圳市步步精科技有限公司

.X: ±0.38
.XX: ±0.25
.XXX: ±0.13

X': ±3"
.X': ±2"
.XX': ±1"

NAME: HDMI 2.1版 19P AF 侧插 L=23.06 四脚直插
带柱 针长1.8 DIP 平口 铜壳 带防尘盖 编带

APPD JM_Zheng

CHKD LYX

DR

JM_Zheng

LYX

SGF



PJ NO: 124-228-190001-J8G

SIZE:A4 DRW NO:


FINISH:SEE NOTES

SCALE:N/A

MAT'L:SEE NOTES


REV:A0 UNIT:mm PAGE:2/3

配带宽37.5MM上带

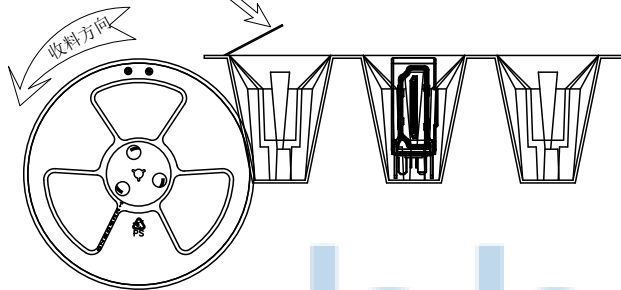

(二)

卷盘规格: $\phi 380 \times 44$ MM
每卷 (150PCS/盘)

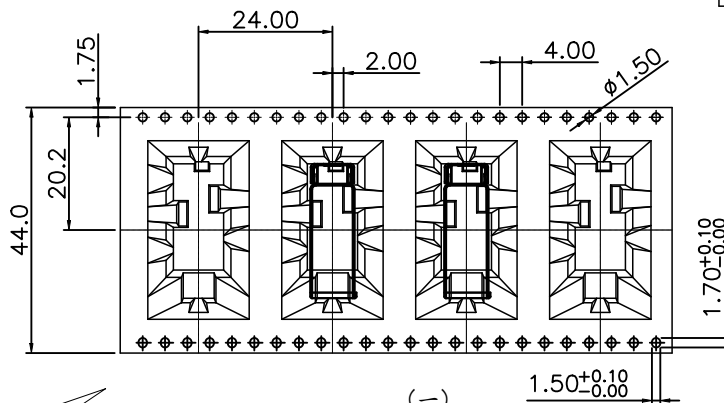

(一)

放置产品


头部空10格和尾部空10格不装产品

收料方向

(护角10+15+10*31CM)*4

防水袋 (附加干燥剂2袋)

(外圈缠保护带)

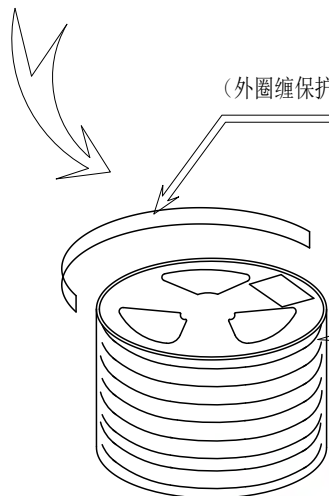



(三)

6盘/栋



(四)

干燥剂-防水袋-装卷盘
150PCS/盘;900PCS/箱

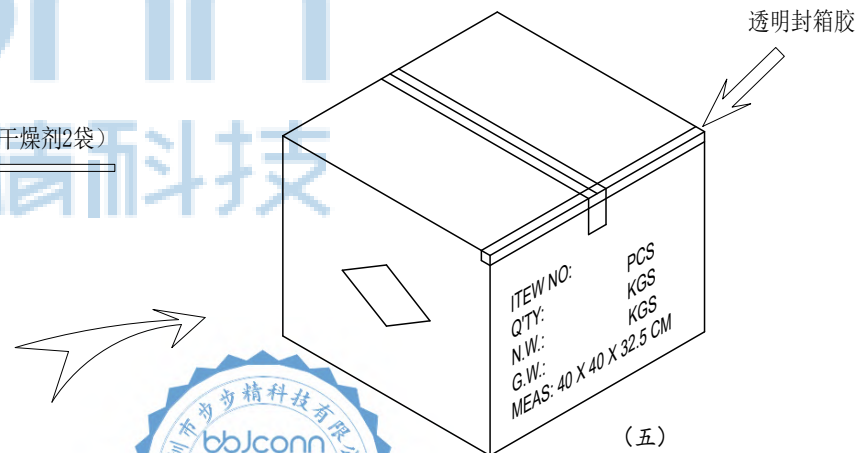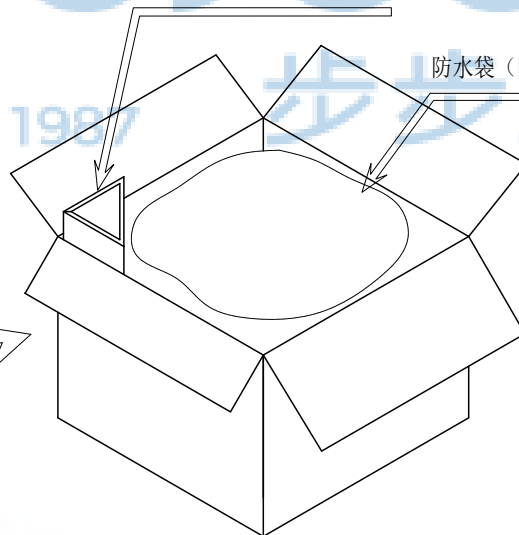

(五)
封装

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0901-1



深圳市步步精科技有限公司

.X: ± 0.38 .X': $\pm 3'$
.XX: ± 0.25 .X': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

APPD JM_Zheng

CHKD LYX

DR

NAME: HDMI 2.1版 19P AF 侧插 L=23.06 四脚直插
带柱 针长1.8 DIP 平口 铜壳 带防尘盖 编带

PJ NO: 124-228-190001-J8G

SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES

SCALE:N/A REV:A0 UNIT:mm PAGE:3/3