

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS







- 1-1. CURRENT RATING: 0.5 AMP
- 1-2. VOLTAGE RATING: 40 V
- 1-3. CONTACT RESISTANCE: 30MILLIOHMS MAX
- 1-4. INSULATION RESISTANCE:100M MIN. @500V DC
- 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE

2. MECHANICAL CHARACTERISTICS:



- 2-1. INSERTION FORCE : 4.5KGF MAX.
- 2-2. WITHDRAWING FORCE : 1KGF ~ 4KGF.

3. LIFE TEST: 10000 CYCLES

4. OPERATING TEMPERATURE: -25° C TO +85° C

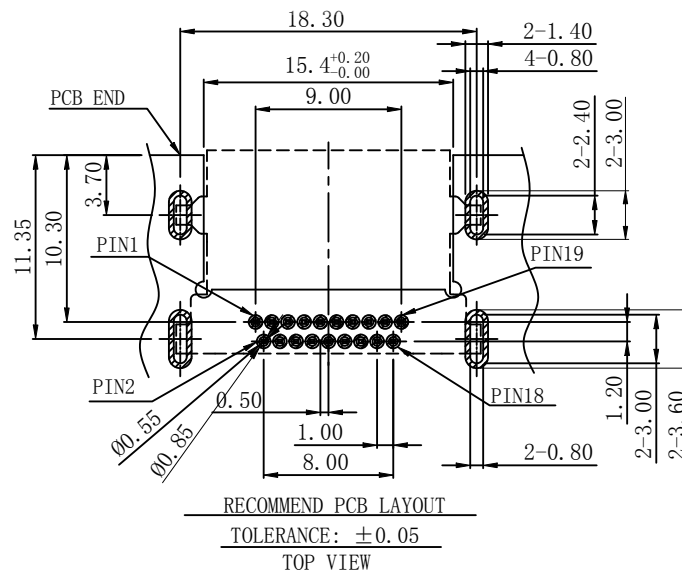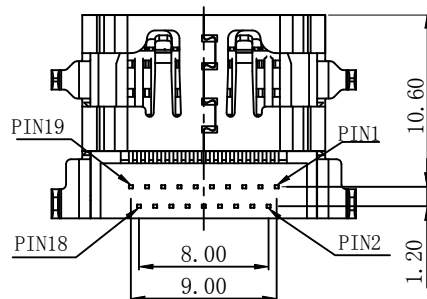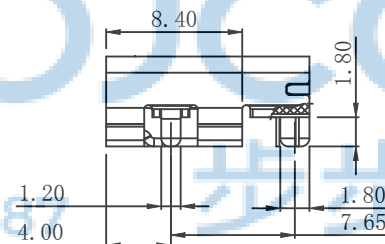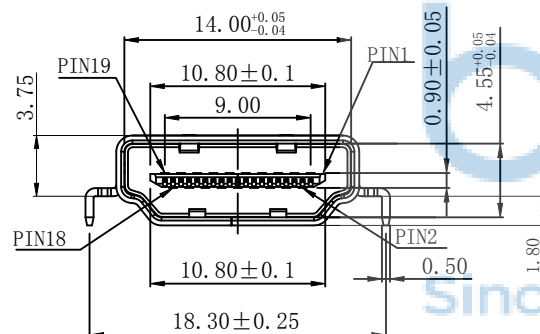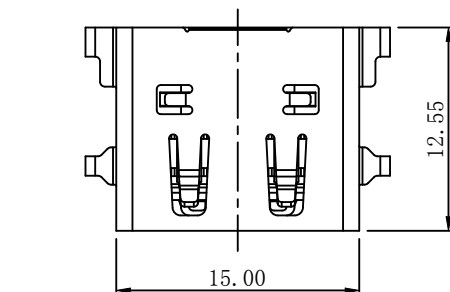

C	SHELL	1	C2680R-H Ni T=0.5mm PLATING ALL OVER
B	TERMINAL	19	C2680R-H SEE PART NO.
A	HOUSING	1	LCP E130i UL94V-0 BLACK
NO	PART NAME	QTY	MATERIAL PLATING & COLOR
THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. 深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X° :±3° .X° :±2° .XX° :±1°	NAME: HDMI 2.1版 19P A母 正向沉板1.80 DIP 针长1.8 四K脚四反向弹片 平口 铜壳 L=12.55 编带
APPD.	JM_Zheng	P.J. NO.: 124-222-190009-J8G	
CHKD.	LYX	SIZE: A4 DRW NO.:	
PDWG,NO:	0602-1	DR.	TSP
FINISH: SEE NOTES		MAT' L.: SEE NOTES	
SCALE: N/A		REV.: A0	UNIT: mm
		PAGE: 1/2	

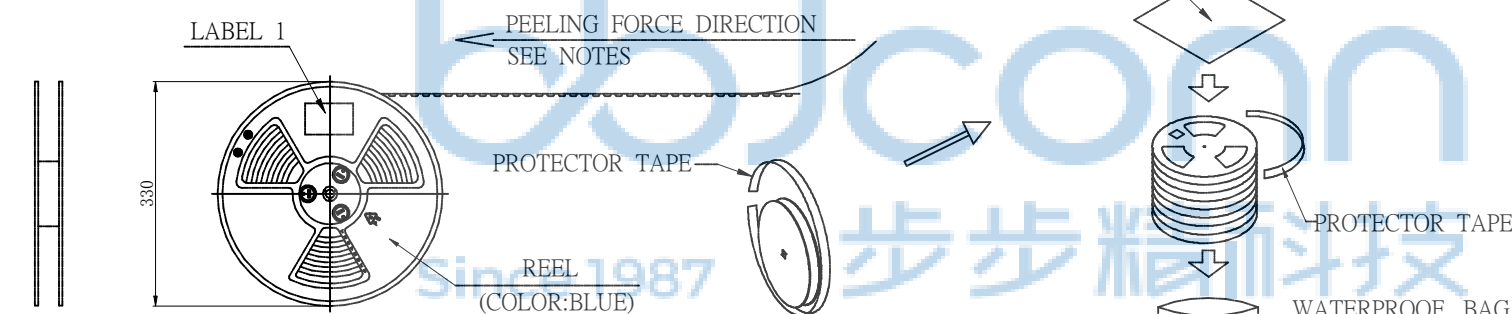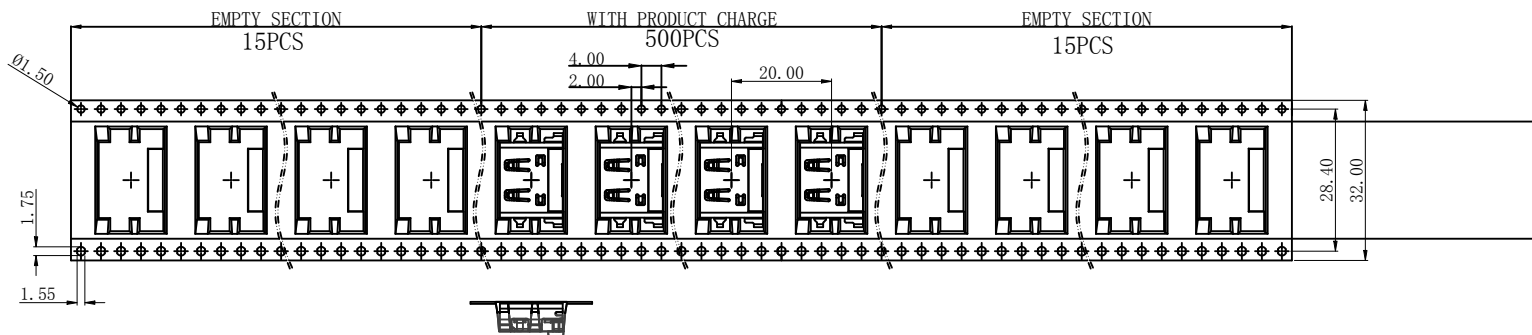

NOTES:

1. DIMNSION:

CARTON: 345*345*240mm,K=K. (1PCS)

EDGE BOARD: 340*310mm (4PCS)



CLAPBOARD: 330*330mm (2PCS)

2. QUANTITY:

500 PCS/REEL

6 REELS/SHIPPING CARTON

3000 PCS/SHIPPING CARTON

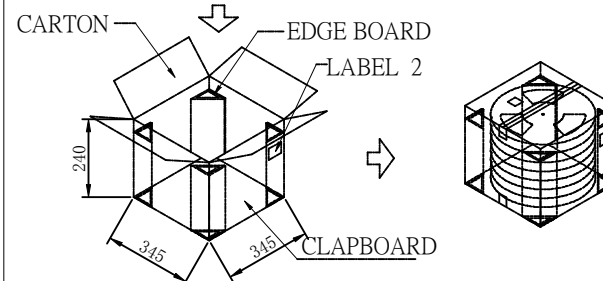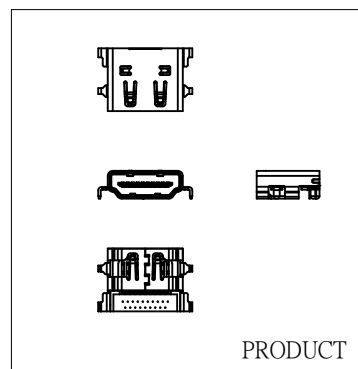

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X°: ±3° X°: ±2° .XX°: ±1°	
APPD.	JM_Zheng	NAME: HDMI 2.1版 19P A母 正向沉板1.80 DIP 针长1.8 四K脚四反向弹片 平口 铜壳 L=12.55 编带	
CHKD.	LYX	P.J. NO.: 124-222-190009-J8G	
PDWG,NO:	0602-1	SIZE: A4 DRW NO.:	
DR.	TSP	FINISH: SEE NOTES MAT' L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	