

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP


4. RECOMMENDED PCB THICKNESS 1.2 TO 1.60MM




3	SHELL	1	STAINLESS STEEL SUS304 T=0.50	NI PLATED
2	CONTACT	19	COPPER ALLOY T=0.20	AU/TIN PLATED
1	HOUSING	1	THERMOPLASTIC LCP	(UL 94V-0) BLACK
No.	PART NAME	QTY	MATERIAL	REMARK

FINISH: SEE NOTES	MAT L.: SEE NOTES		
SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 1


GENERAL TOLERANCES:±0.05

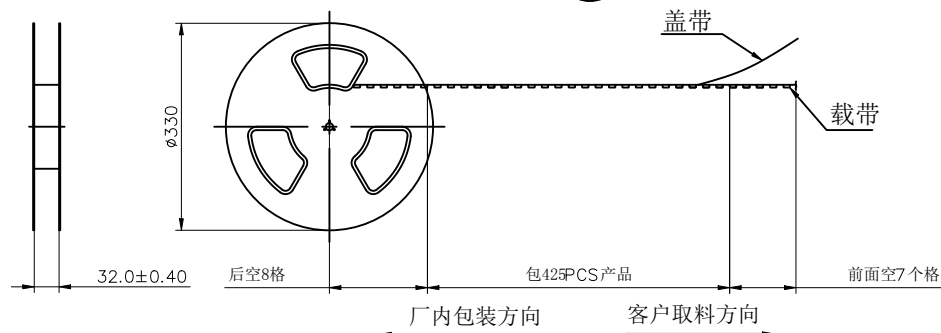

备注:
1. 载带材质: PET 透明
2. 盖带材质: PET 透明料
3. 载带所有公差±0.05以内, 检验实配可顺利放入无干涉。

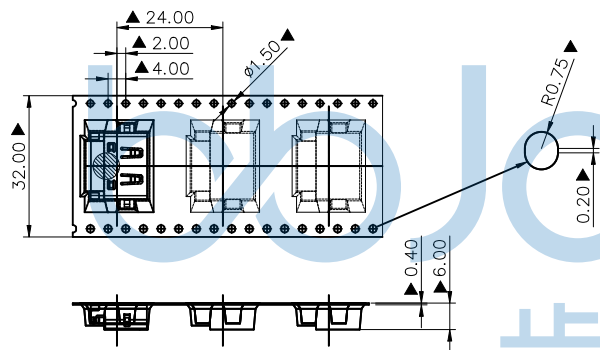


透明载带一卷425PCS,前后空7,后空8,共440格



料号: _____
厂商: _____
数量: _____

2 每卷贴上内标签 (如图如示)




3-1. 将8盘装入PE胶袋, 再放入纸箱中。
3-2. 纸箱4个角落用缓冲材料塞好, 并盖上与之相配的纸板
备注: 纸箱的规格: 335*335*340 (mm)
PE胶袋的规格: (长) 650mm* (宽) 620mm* (厚) 0.05mm

盘/每箱	PCS/每盘	PCS/每箱
8盘/每箱	425PCS/每盘	3400PCS/每箱



Table1

专用ROHS标签: (HF)

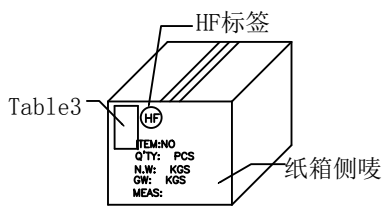

4-1 纸箱开口处以透明胶带贴合。
4-2 若有未装满的零数箱, 必须以缓冲材塞
4-3. 产品外包装标签贴法: (如上图)。

采购订单号: _____ (客户订单号)
物料编号: _____
物料名称: _____
品名: _____
规格: _____
单包数量: _____
装箱数量: _____
供应商名称: _____

5-1. 外标签贴在外箱侧左上角, 环保标签贴在外标签右上角。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3* .X*: ±2* .XX*: ±1*	NAME: HDMI 19P 母座 90度 四脚插 端子DIP 正向 沉板2.77 L=12.70 平口 不锈钢外壳	
APPD.	JM_Zheng	PJ. NO.: 124-222-190008-H5G	
CHKD.	LYX	SIZE: A4 DRW NO.:	
PDWG.NO: 0409-1	DR.	TSP	FINISH: SEE NOTES MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2