

REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

NOTES:

1.ELECTRONIC:

CONTACT RESISTANCE: 20mohm MAX
INSULATION RESISTANCE: 1000 Mohm MIN
WITHSTAND VOLTAGE:AC 500V,1min.



2.MECHANICAL:

DURABILITY: 10000 CYCLE.

3.ENVIRONMENT CHARACTERISTICS:

OPERING TEMPERATURE:-55°C TO +105°C

4.RECOMMENDER PCB THICKNESS 1.2 TO 1.60MM

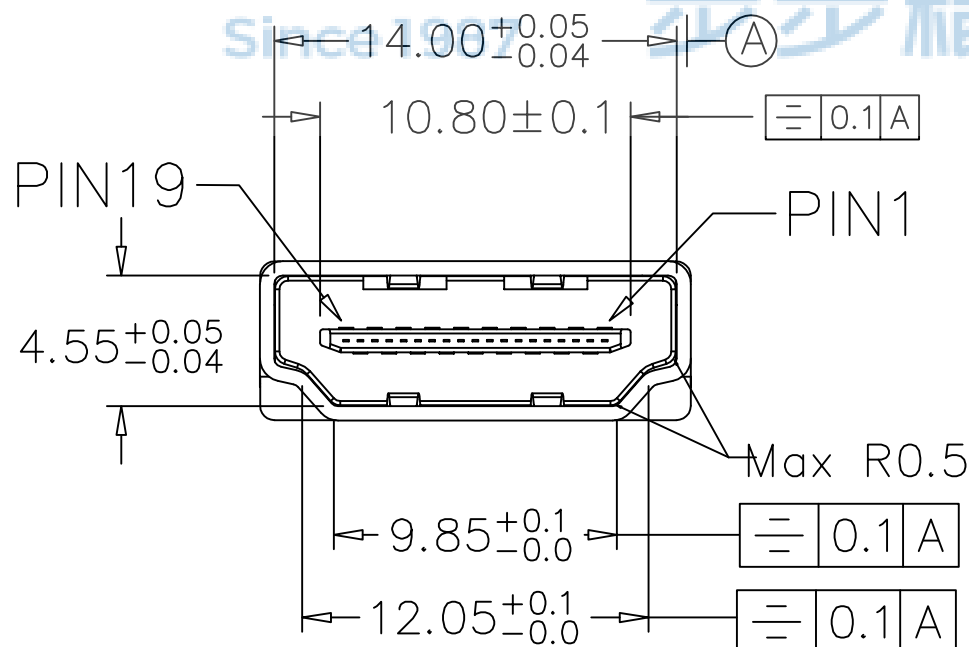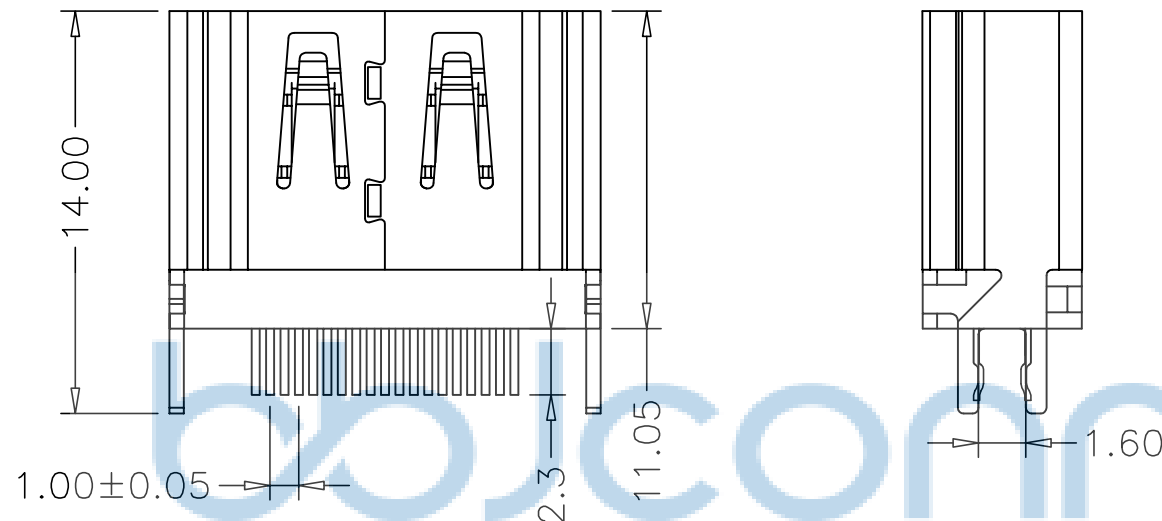

MATERIAL LIST:


No.	PART NAME	QTY	MATERIAL	REMARK
3	SHELL	1	COPPER ALLOY T=0.40	NI 50U" PLATED
2	CONTACT	19	COPPER ALLOY T=0.20	CONTACT AREA PLATED AU 1U", SOLDER AREA PLATED SN 100U"
1	HOUSING	1	THERMOPLASTIC(LCP)	(UL 94V-0) BLACK

TOLERANCE UNSPECIFIED			
.0	±0.35		
.00	±0.25		
.000	±0.15		
X.°	±2.00°		
CUSTOMER DRAWING			
DRAWN/ DATE	设计	LHC	SIZE:A4
CHECKED/ DATE	审核	LYX	SCALE: 1:1
APPROVED/ DATE	核准	LJP	DWG. PATH



深圳市步步精科技有限公司

TITLE: HDMI 19P 母座 180度 H=11.05 夹板1.60 平口
LCP黑胶 铁壳 打KEY脚 端子G-F (BHDF19B2N1314)

PART. NO: 124-225-190001-H5G	REV.: 版本
0409-1	SHEET: 页码

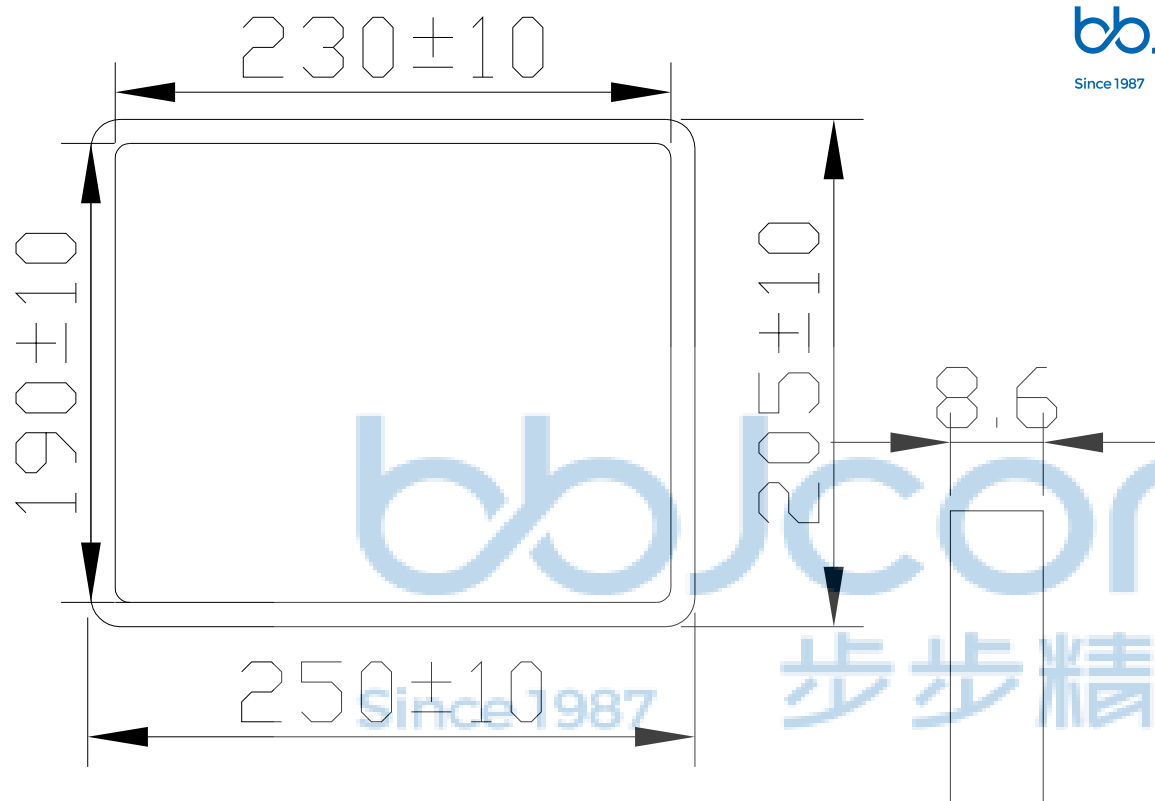

bbJconn
Since 1987 步步精科技

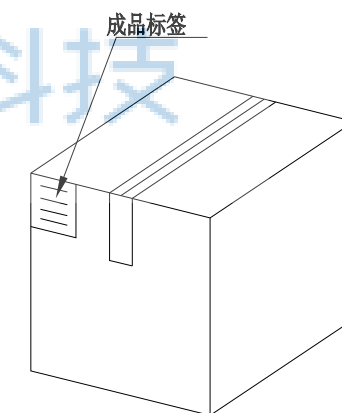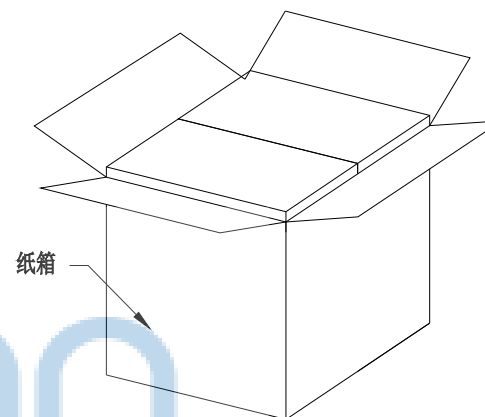

1. 包装要求:

- 1.1 每盒吸塑盒包装100pcs;
- 1.2 每20盘放一箱, 共计2000PCS;
- 1.3 纸箱外贴上标签



纸箱规格: 350*210*290

TOLERANCE UNSPECIFIED			 深圳市步步精科技有限公司			
.0	±0.35					
.00	±0.25					
.000	±0.15					
X.°	±2.00°					
CUSTOMER DRAWING			TITLE: HDMI 19P 母座 180度 H=11.05 夹板1.60 平口 LCP黑胶 铁壳 打KEY脚 端子G-F (BHDF19B2N1314)			
DRAWN/ DATE	设计	LHC	SIZE:A4	UNIT:MM.	PART. NO: 124-225-190001-H5G	
CHECKED/ DATE	审核	LYX	SCALE: 1:1		PROJECTION 	REV.: 版本
APPROVED/ DATE	核准	LJP	DWG.	PATH	0409-1	SHEET: 页码