


REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		



RECOMMENDED PCB LAYOUT
GENERAL TOLERANCES:±0.05

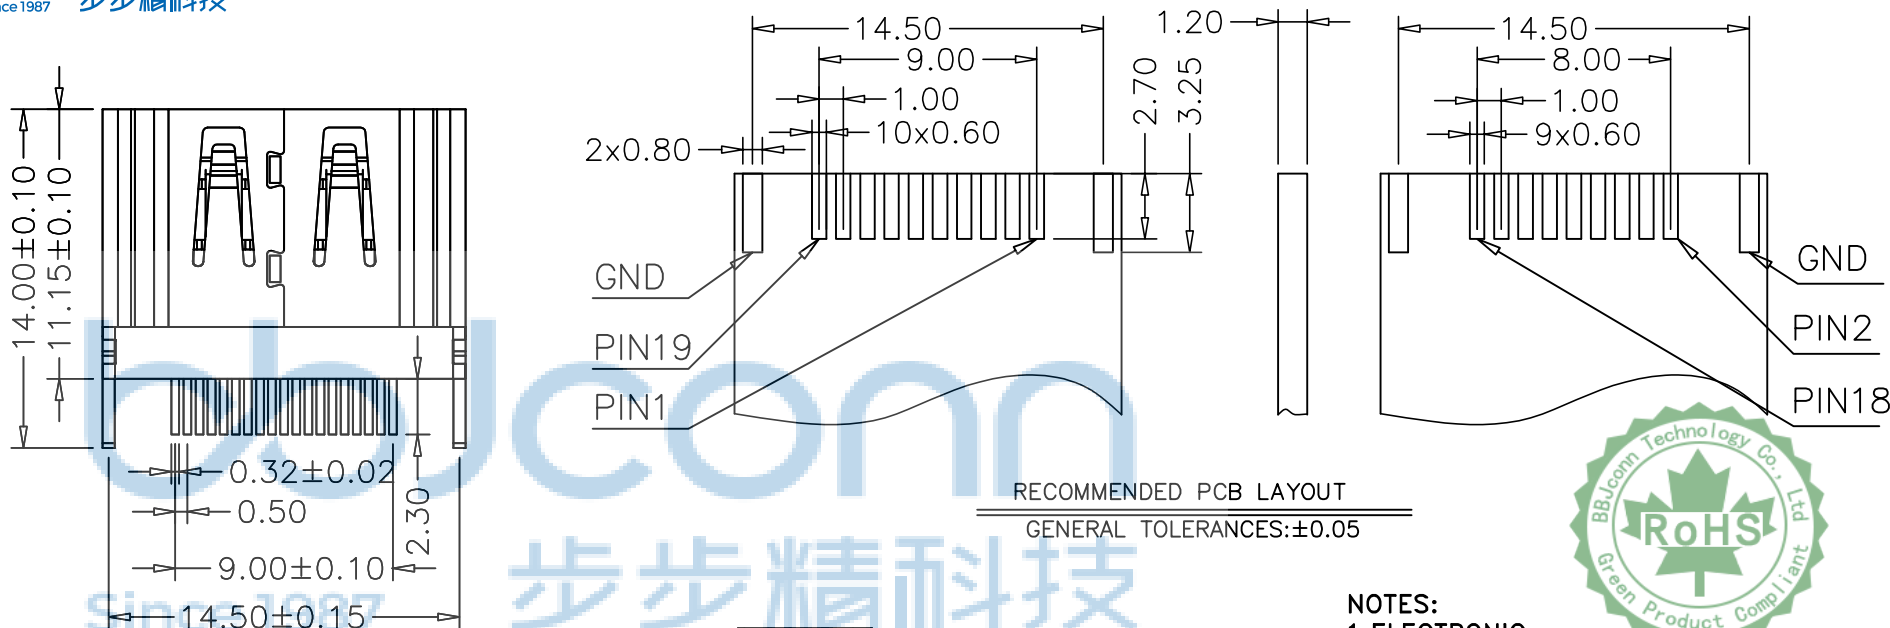

NOTES:

1.ELECTRONIC:

CONTACT RESISTANCE: 20mohm MAX
INSULATION RESISTANCE: 1000 Mohm MIN
WITHSTAND VOLTAGE:AC 500V,1min.



2.MECHANICAL:

DURABILITY: 10000 CYCLE.

3.ENVIRONMENT CHARACTERISTICS:

OPERATING TEMPERATURE:-25°C TO +85°C

4.RECOMMENDER PCB THICKNESS 1.2

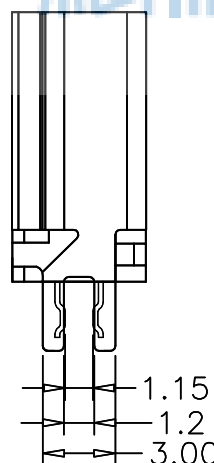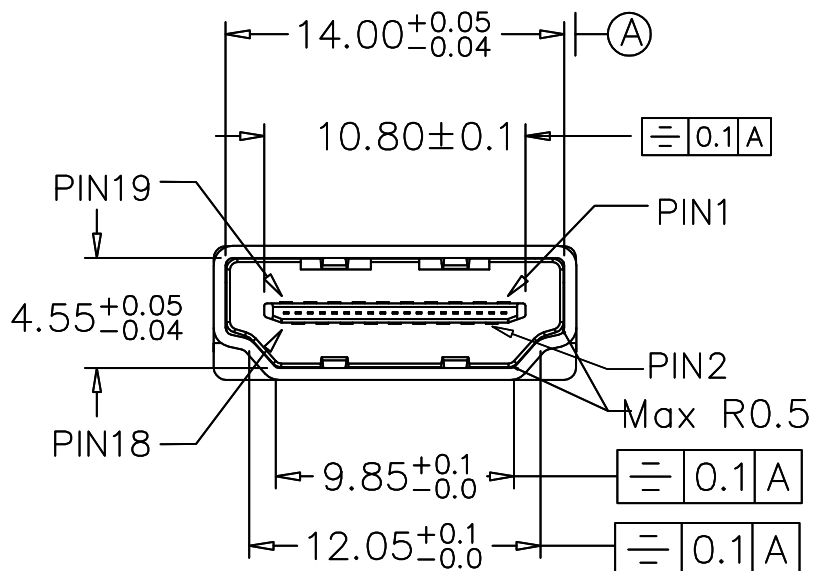

3	SHELL	1	COPPERY ALLOY/SPCC	AU OR NI PLATED
2	CONTACT	19	COPPER ALLOY	AU /SN PLATED
1	HOUSING	1	THERMOPLASTIC(LCP)	(UL 94V-0) BLACK
No.	PART NAME	QTY	MATERIAL	REMARK


TOLERANCE UNSPECIFIED

.0 ±0.35
.00 ±0.25
.000 ±0.15
X.° ±2.00°
CUSTOMER DRAWING



深圳市步步精科技有限公司

TITLE: HDMI 19P 母座 180度 H=11.05 夹板1.20 平口
LCP黑胶 铁壳 打KEY脚 (BHDF19B1N1366)

DRAWN/ DATE	设计 LHC	SIZE:A4	UNIT:MM.	PART. NO: 124-225-190002-H5G	
CHECKED/ DATE	审核 LYX	SCALE: 1:1	PROJECTION	REV.: 版本	
APPROVED/ DATE	核准 LJP	DWG. PATH	0409-1	SHEET: 页码	

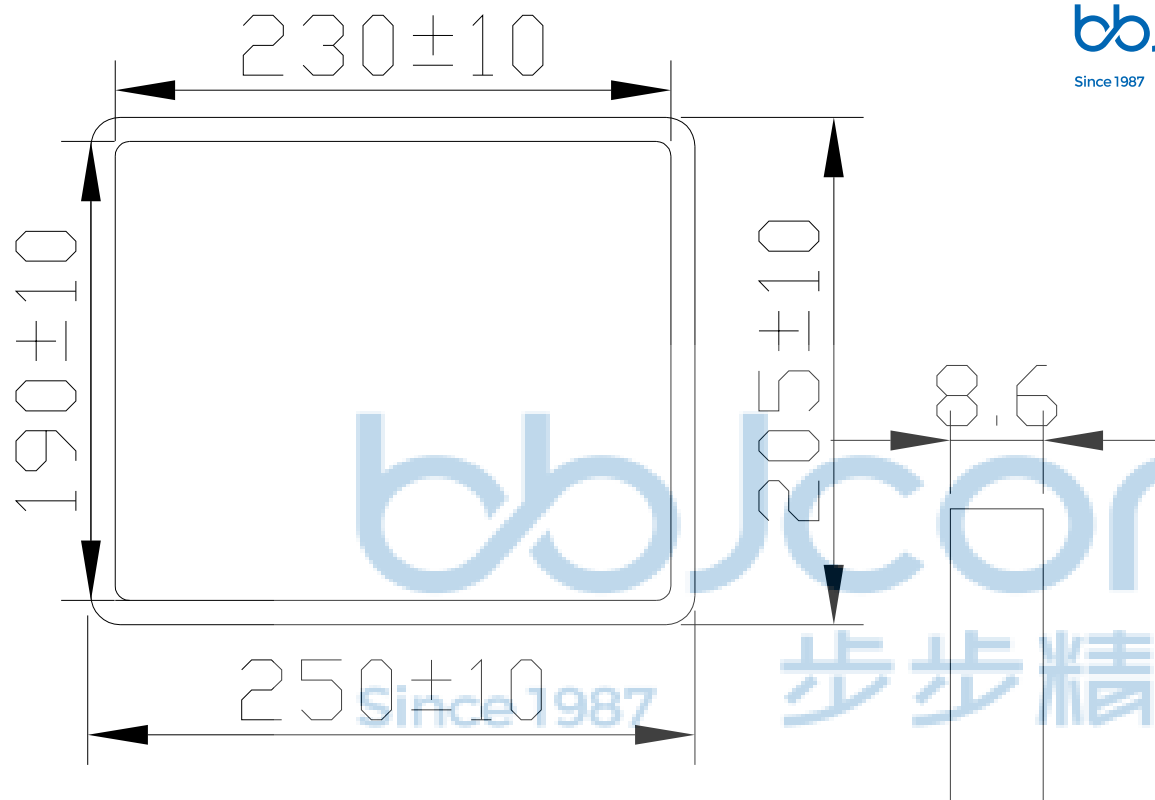

bbJconn
Since 1987 步步精科技

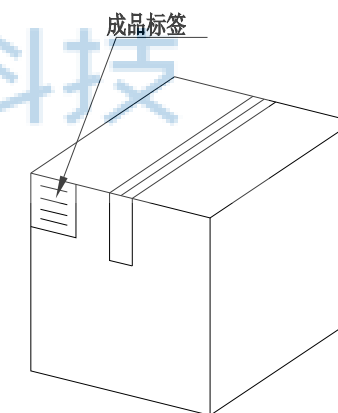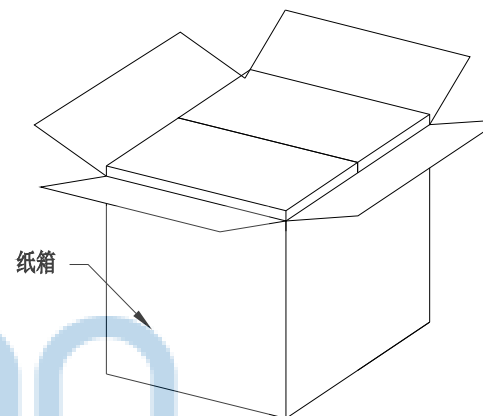

1. 包装要求:

- 1.1 每盒吸塑盒包装100pcs;
- 1.2 每20盘放一箱, 共计2000PCS;
- 1.3 纸箱外贴上标签



纸箱规格: 350*210*290

TOLERANCE UNSPECIFIED			 深圳市步步精科技有限公司		
.	0	±0.35			
.	00	±0.25	TITLE: HDMI 19P 母座 180度 H=11.05 夹板1.20 平口		
.	000	±0.15	LCP黑胶 铁壳 打KEY脚 (BHDF19B1N1366)		
X. °		±2.00°	PART. NO: 124-225-190002-H5G		
CUSTOMER DRAWING			PROJECTION 		
DRAWN/ DATE	设计	LHC	SIZE: A4	UNIT: MM.	REV.: 版本
CHECKED/ DATE	审核	LYX	SCALE: 1:1	DWG. PATH	SHEET: 页码
APPROVED/ DATE	核准	LJP	0409-1		