

NOTES:

1.ELECTRONIC:

CONTACT RESISTANCE: 20mohm MAX
INSULATION RESISTANCE: 1000 Mohm MIN
WITHSTAND VOLTAGE:AC 500V,1min.

2.MECHANICAL:

DURABILITY: 10000 CYCLE.





3.ENVIRONMENT CHARACTERISTICS:

OPERTING TEMPERATURE:-55°C TO +105°C


4.RECOMMANDER PCB THICKNESS 1.2 TO 1.60MM

5.MATERIAL LIST:

No.	PART NAME	QTY	MATERIAL	REMARK
4	SHELL	1	SPCC or C2680 T=0.50	NI PLATED
3	CONTACT	19	COPPER ALLOY T=0.20	AU/SN PLATED
2	CAP	1	THERMOPLASTIC(LCP)	(UL 94V-0) BLACK
1	HOUSING	1	THERMOPLASTIC(LCP)	(UL 94V-0) BLACK


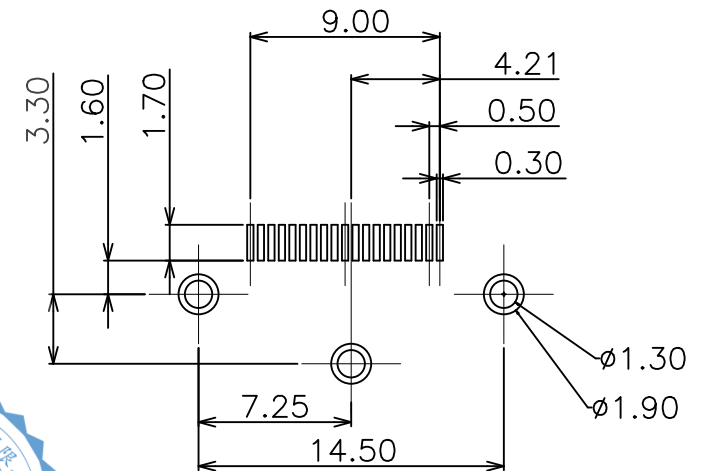
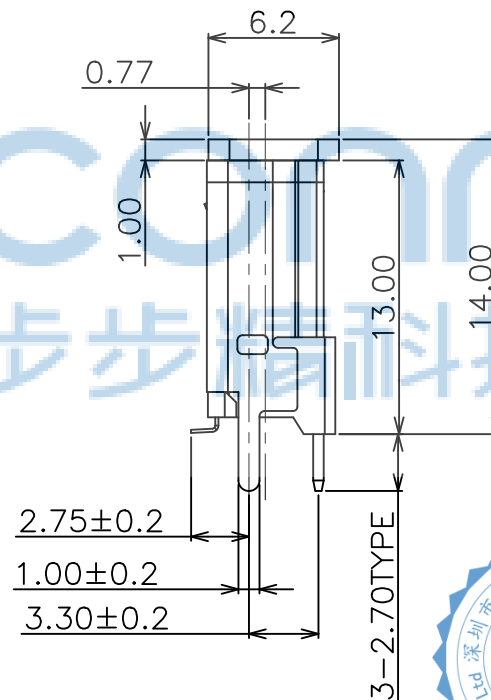
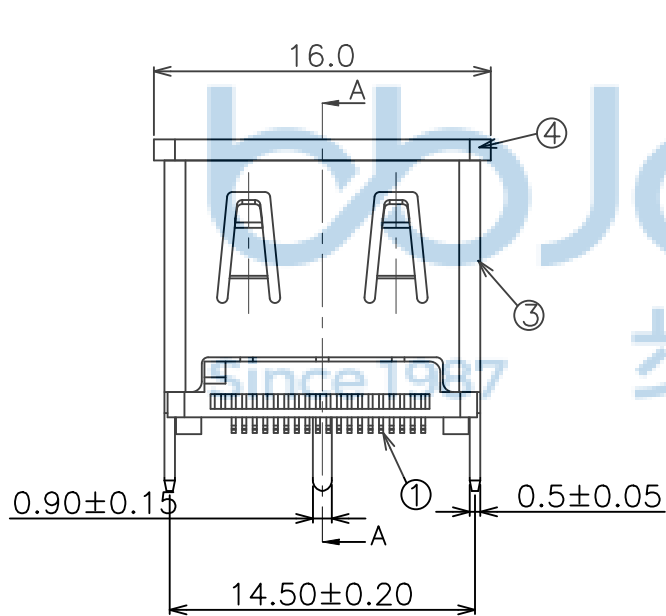
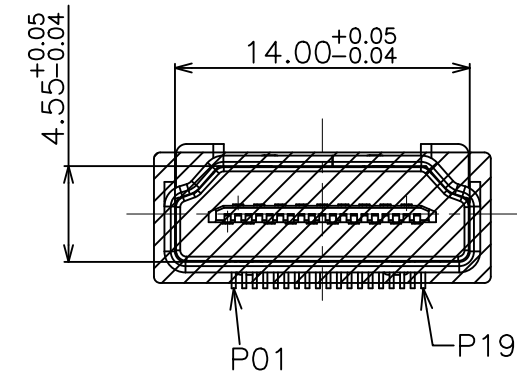


PCB LAYOUT(TOP VIEW)
(T=1.60mm)

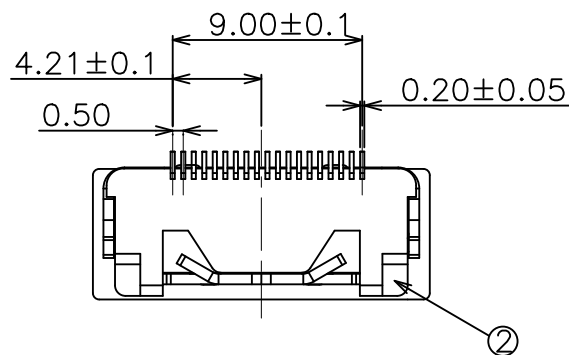

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0409-1

深圳市步步精科技有限公司			
.X: ±0.38 .X': ±3" .XX: ±0.25 .X'': ±2" .XXX: ±0.13 .X'': ±1"		NAME: HDMI 19P 母座 180度 三脚插 H=13.00 端子SMT 平口 带防尘盖 铁壳	
APPD.	JM_Zheng 23/05'02	PJ. NO.: 124-224-190001-H5G	
CHKD.	LYX 23/05'02	SIZE: A4 DRW NO.:	
DR.	LHC 23/05'02	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/1

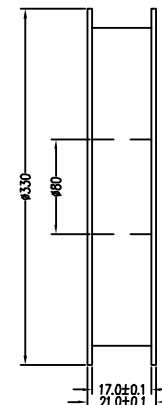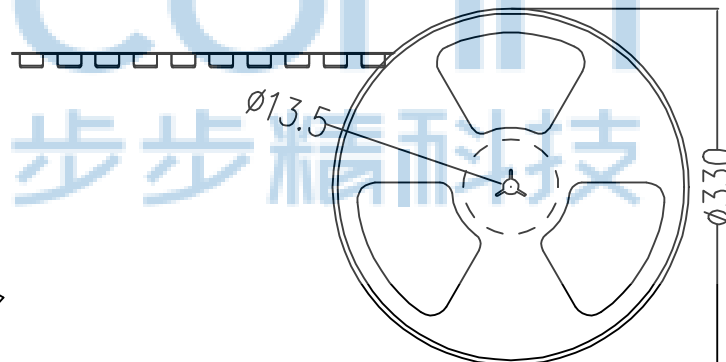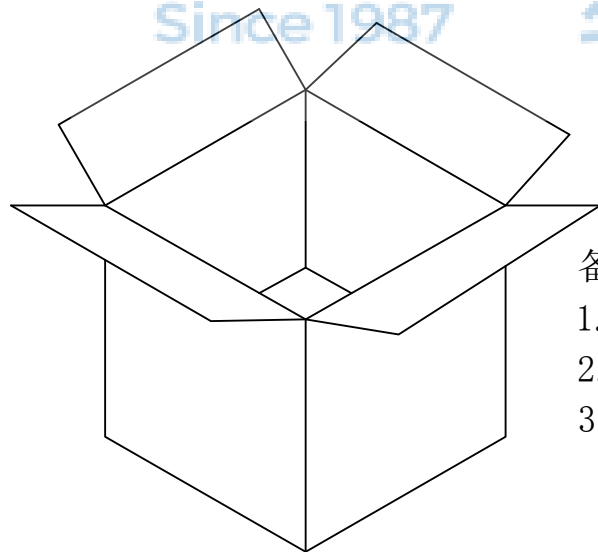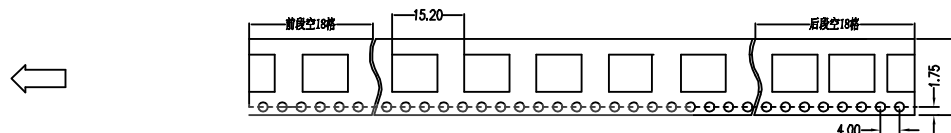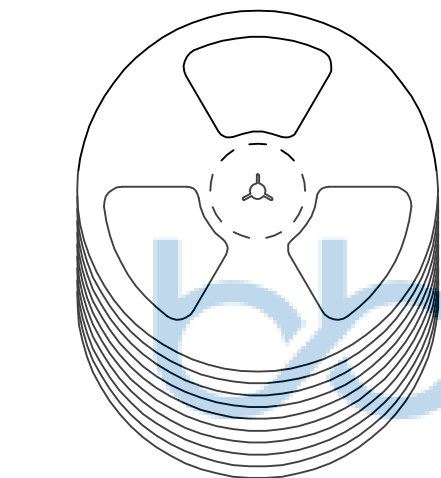

备注:

1. 包装数量: 250 /PCS/卷, 8 卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X": ±3" .X": ±2" .XX": ±1"		NAME: HDMI 19P 母座 180度 三脚插 H=13.00 端子SMT 平口 带防尘盖 铁壳			
APPD.	JM_Zheng	23/05'02	PJ. NO.: 124-224-190001-H5G SIZE: A4 DRW NO.:		FINISH: SEE NOTES		
CHKD.	LYX	23/05'02			MAT'L.: SEE NOTES		
PDWG.NO: 0409-1	DR.	LHC	23/05'02	SCALE: N/A		REV.: A0	UNIT: mm
				PAGE: 1/1			