

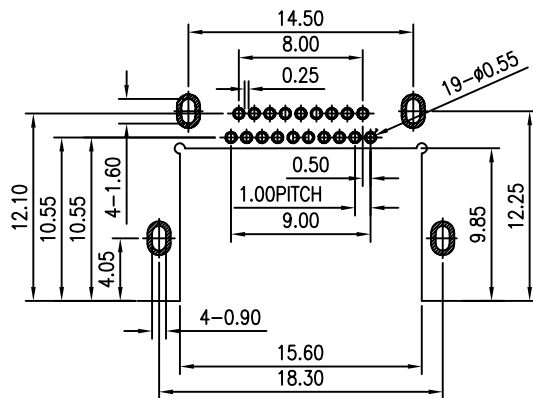
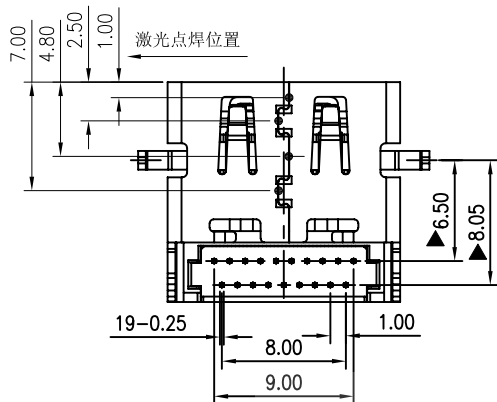

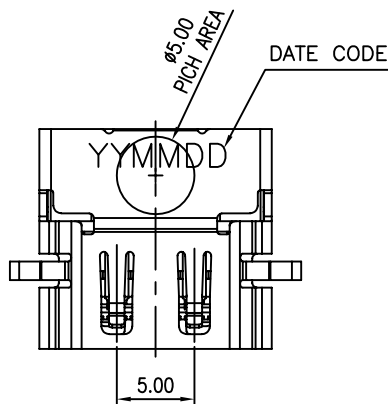


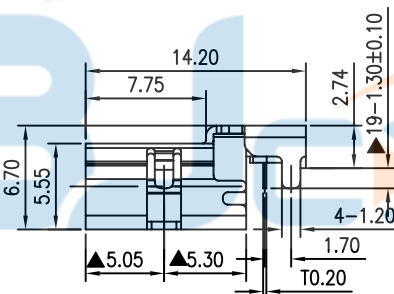

RECOMMENDED PCB LAYOUT(TOP VIEW)
(THICKNESS=1.0±0.10mm)
(TOLERANCE=±0.05mm)

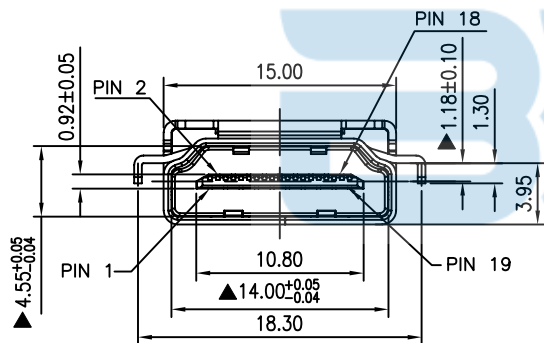

REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

NOTES:

1.ELECTRONIC:

VOLTAGE RATING:40V AC MAX
CONTACT RESISTANCE: 20mohm MAX
INSULATION RESISTANCE: 1000 Mohm MIN
WITHSTAND VOLTAGE:AC 500V,1min.

2.MECHANICAL:

DURABILITY: 10000 CYCLE.

3.ENVIRONMENT CHARACTERISTICS:

OPERTING TEMPERATURE:-55°C TO +105°C

4.标称"▲"符号的尺寸为重点检验尺寸;



MATERIAL LIST:

No.	PART NAME	QTY	MATERIAL	REMARK
3	SHELL	1	COPPER ALLOY T=0.50	NI PLATED
2	CONTACT	19	COPPER ALLOY T=0.20	AU/TIN PLATED
1	HOUSING	1	THERMOPLASTIC	(UL 94V-0) BLACK

深圳市步步精科技有限公司





TITLE:

HDMI 19P 母座 L=14.20 反向沉板3.95 四脚插 端子DIP 平口 LCP黑胶 铜壳

TOLERANCE UNSPECIFIED					
.0	±0.35				
.00	±0.25				
.000	±0.15				
X.°	±2.00°				
CUSTOMER DRAWING					
DRAWN/ DATE	设计	TSP	SIZE:A4	UNIT:MM.	PART.NO: 124-222-190009-H5G
CHECKED/ DATE	审核	LYX	SCALE: 1:1	PROJECTION	REV.: 版本
APPROVED/ DATE	核准	LJP	DWG. PATH	0409-1	SHEET: 页码



REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

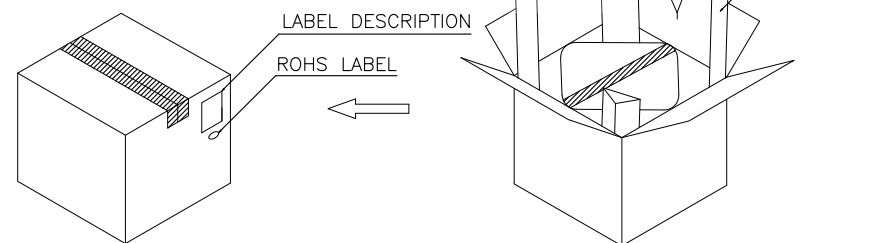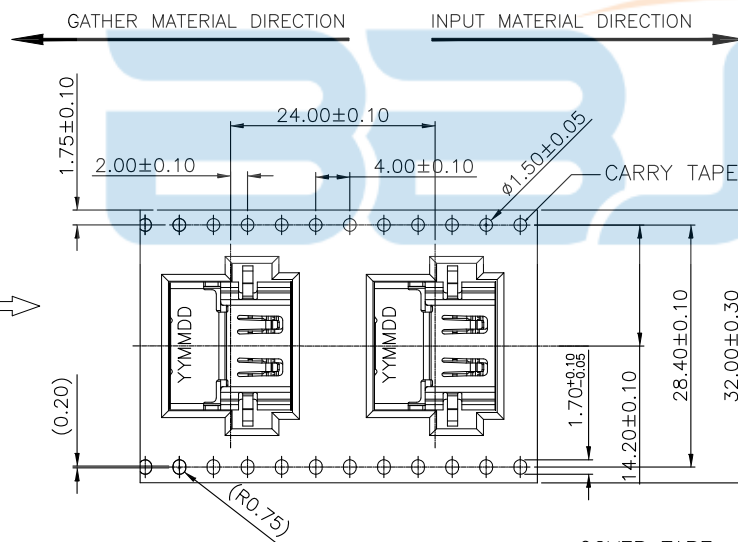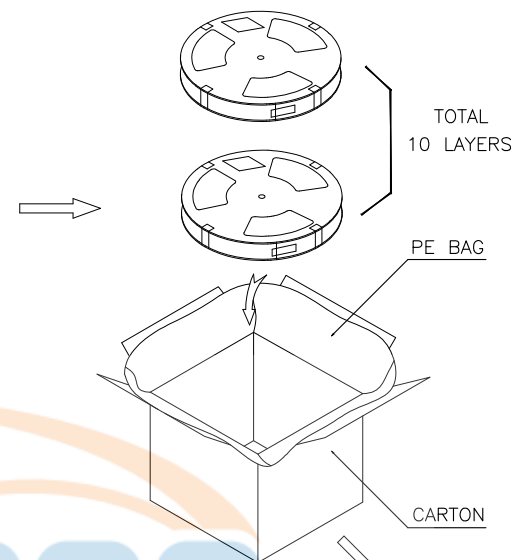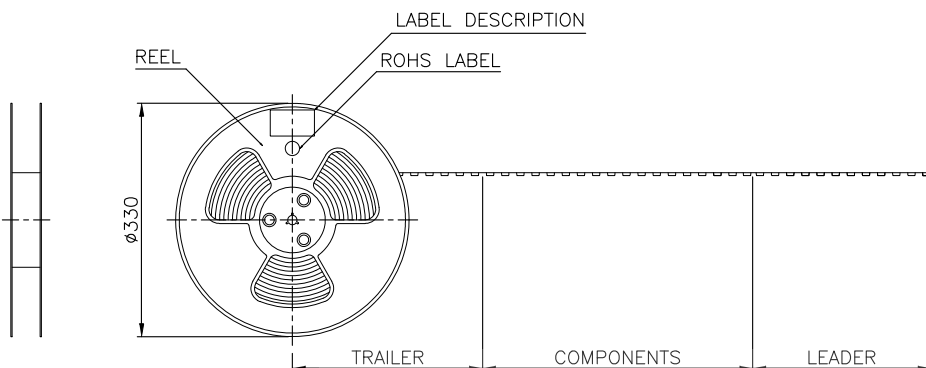

- NOTES:
- 1.THE START AND END OF EACH REEL, BASED ON THE ACTUAL QUANTITY, RESERVED 10--20PCS SPACE;
 - 2.COVER TAPE AND CARRY TAPE PEEL: 10g~130g; PEEL DEG.:165°~175°; PEEL SPEED: 250~300mm/min;
 - 3.CARTON SIZE: 350*350*380MM. K=K;
 - 4.QTY': 370PCS/REEL,10REEL/CARTON, TOTAL 3700PCS/CARTON.

TOLERANCE UNSPECIFIED			深圳市步步精科技有限公司			
.0	±0.35					
.00	±0.25					
.000	±0.15					
X.°	±2.00°					
CUSTOMER DRAWING			TITLE: HDMI 19P 母座 L=14.20 反向沉板3.95 四脚插 端子DIP 平口 LCP黑胶 铜壳			
DRAWN/ DATE	设计	TSP	SIZE:A4	UNIT:MM.	PART.NO: 124-222-190009-H5G	
CHECKED/ DATE	审核	LYX	SCALE: 1:1	PROJECTION		REV.: 版本
APPROVED/ DATE	核准	LJP	DWG. PATH		0409-1	SHEET: 页码