

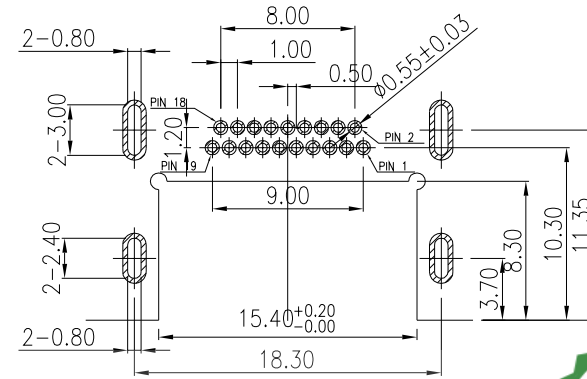
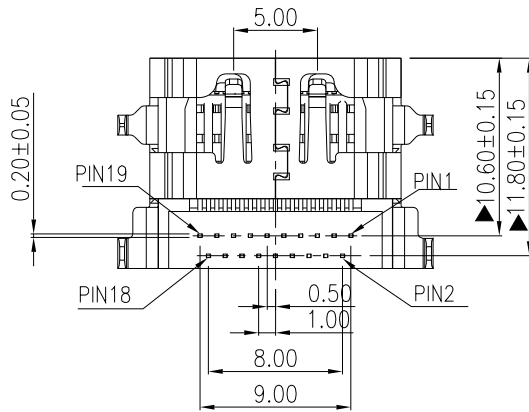
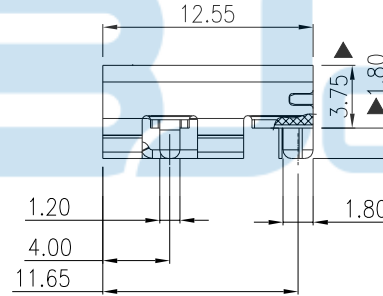
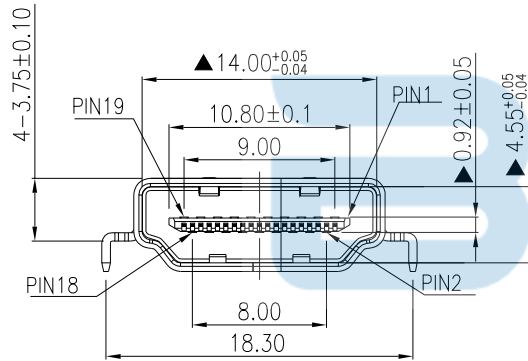




TOLERANCE: ± 0.05
RECOMMENDED PCB LAYOUT
(TOP VIEW)



NOTES:

- 1.ELECTRONIC:
CONTACT RESISTANCE: 20mohm MAX
INSULATION RESISTANCE: 1000 Mohm MIN
WITHSTAND VOLTAGE:AC 500V,1min.
- 2.MECHANICAL:
DURABILITY: 10000 CYCLE.
- 3.ENVIRONMENT CHARACTERISTICS:
OPERING TEMPERATURE:-55°C TO +105°C
- 4.RECOMMANDER PCB THICKNESS 1.2
- 5.标标"▲"符号的尺寸为重点检验尺寸;

6.MATERIAL LIST:

3	SHELL	1	COPPER ALLOY/SUS304 T=0.50	NI PLATED
2	CONTACT	19	COPPER ALLOY T=0.20	AU/TIN PLATED
1	HOUSING	1	THERMOPLASTIC LCP	(UL 94V-0) BLACK
No.	PART NAME	QTY	MATERIAL	REMARK



GENERAL TOLERANCES (UNLESS SPECIFIED)

ITEM	MM	INCH
3 PLACE	± 0.15	± 0.005
2 PLACE	± 0.25	± 0.01
1 PLACE	± 0.35	± 0.015
0 PLACE	± 0.50	± 0.02

深圳市步步精科技有限公司

TITLE:HDMI 母座 四脚插 沉板1.8(端子DIP) L=12.55 平口
不锈钢外壳 LCP黑胶 端子半金1u+雾锡100u 编带

DRAWN/ DATE	设计 HMY	SIZE:A4	UNIT:MM.	PART.NO: HD.01.31-34-K001
CHECKED/ DATE	审核 LYX	SCALE: 1:1	PROJECTION	REV.: 版本
APPROVED/ DATE	核准 LJP	DWG. PATH	0409-1	SHEET: 页码

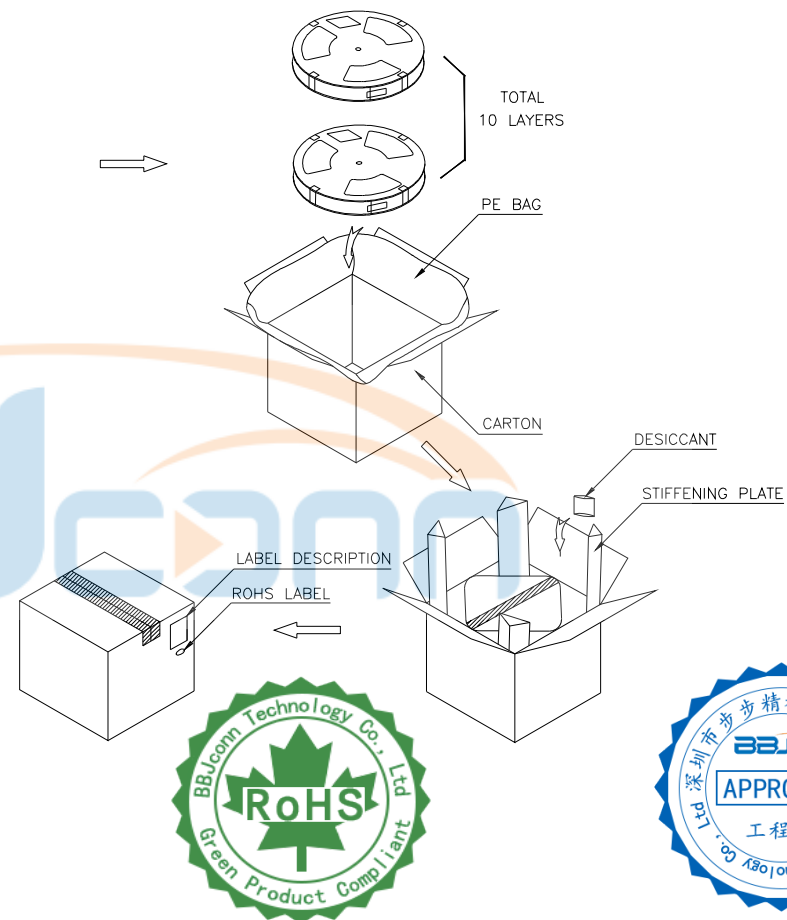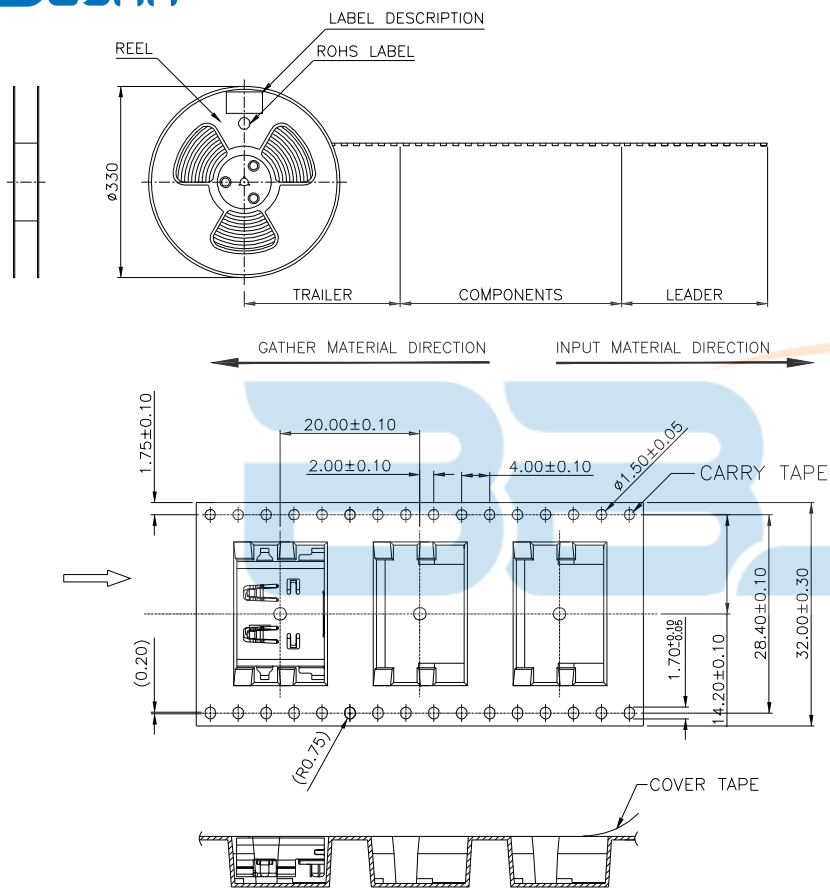

REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

Notes:

- 1.THE START AND END OF EACH REEL, BASED ON THE ACTUAL QUANTITY, RESERVED 5--15PCS SPACE;
- 2.COVER TAPE AND CARRY TAPE PEEL: 10g~130g; PEEL DEG.:165°~175°; PEEL SPEED: 250~300mm/min;
- 3.QTY': 500PCS/REEL, 10REEL/CARTON, TOTAL 5000PCS/CARTON;

GENERAL TOLERANCES (UNLESS SPECIFIED)			深圳市步步精科技有限公司		
ITEM	MM	INCH	TITLE:HDMI 母座 四脚插 沉板1.8(端子DIP) L=12.55 平口 不锈钢外壳 LCP黑胶 端子半金1u+雾锡100u 编带		
3 PLACE	±0.15	±0.005	SIZE:A4	UNIT:MM.	PART.NO: HD.01.31-34-K001
2 PLACE	0.25	±0.01	SCALE: 1:1	PROJECTION	REV.: 版本
1 PLACE	±0.35	±0.015	DWG. PATH	0409-1	SHEET: 页码
0 PLACE	±0.50	±0.02			
DRAWN/ DATE	设计	HMY			
CHECKED/ DATE	审核	LYX			
APPROVED/ DATE	核准	LJP			