


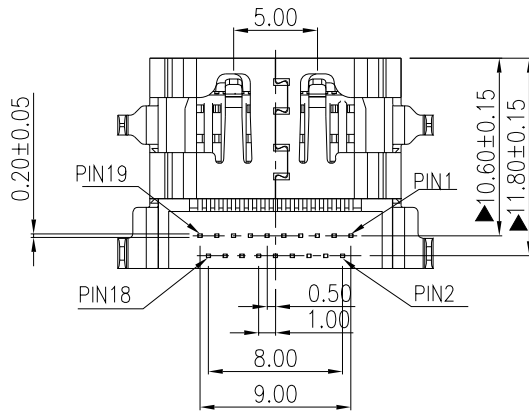
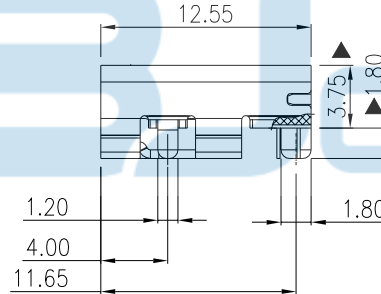
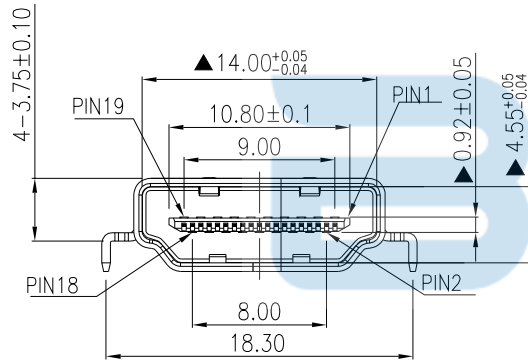




REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		



TOLERANCE: ± 0.05
RECOMMENDED PCB LAYOUT
(TOP VIEW)

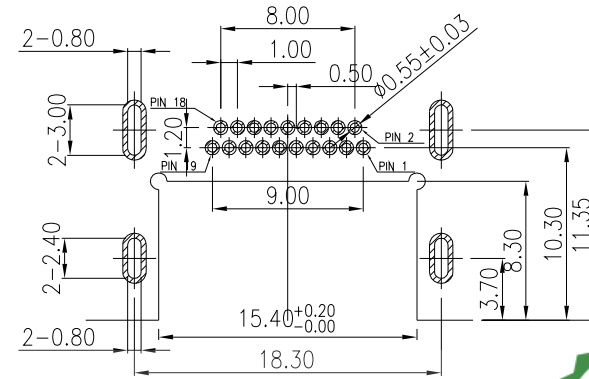

NOTES:

- 1.ELECTRONIC:
CONTACT RESISTANCE: 20mohm MAX
INSULATION RESISTANCE: 1000 Mohm MIN
WITHSTAND VOLTAGE:AC 500V,1min.
- 2.MECHANICAL:
DURABILITY: 10000 CYCLE.
- 3.ENVIRONMENT CHARACTERISTICS:
OPERING TEMPERATURE:-55°C TO +105°C
- 4.RECOMMANDER PCB THICKNESS 1.2
- 5.标标"▲"符的尺寸为重点检验尺寸;

6.MATERIAL LIST:

3	SHELL	1	COPPER ALLOY T=0.50	NI PLATED
2	CONTACT	19	COPPER ALLOY T=0.20	AU/TIN PLATED
1	HOUSING	1	THERMOPLASTIC	(UL 94V-0) BLACK
No.	PART NAME	QTY	MATERIAL	REMARK



GENERAL TOLERANCES (UNLESS SPECIFIED)

ITEM	MM	INCH
3 PLACE	± 0.15	± 0.005
2 PLACE	± 0.25	± 0.01
1 PLACE	± 0.35	± 0.015
0 PLACE	± 0.50	± 0.02

深圳市步步精科技有限公司

TITLE: HDMI 母座 四脚插沉板1.8 (端子DIP) L=12.55 平口铜壳

DRAWN/ DATE	设计 HMY	SIZE:A4	UNIT:MM.	PART.NO: 124-222-190010-H5G	
CHECKED/ DATE	审核 LYX	SCALE: 1:1	PROJECTION	REV.: 版本	
APPROVED/ DATE	核准 LJP	DWG. PATH	0409-1	SHEET: 页码	

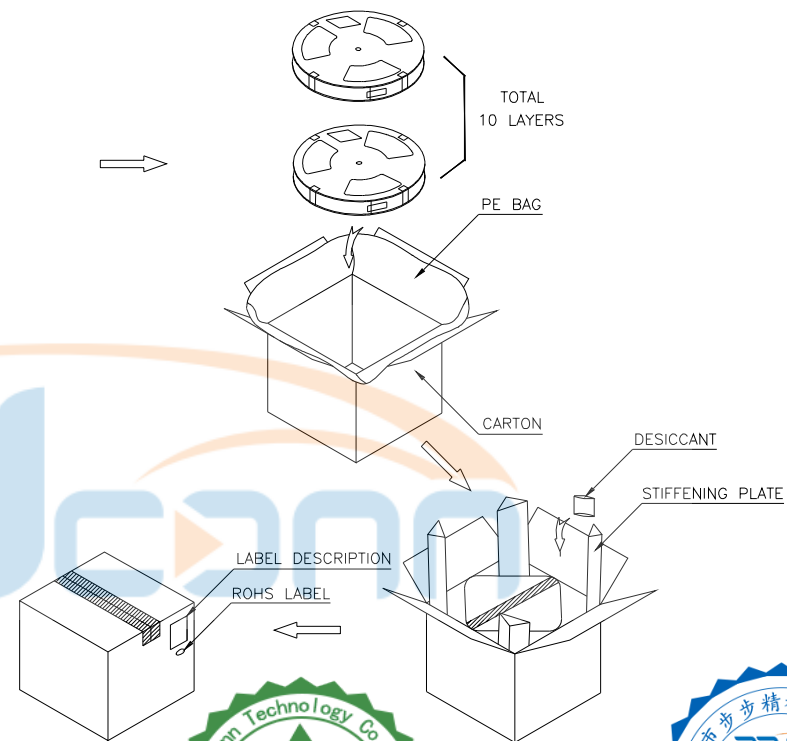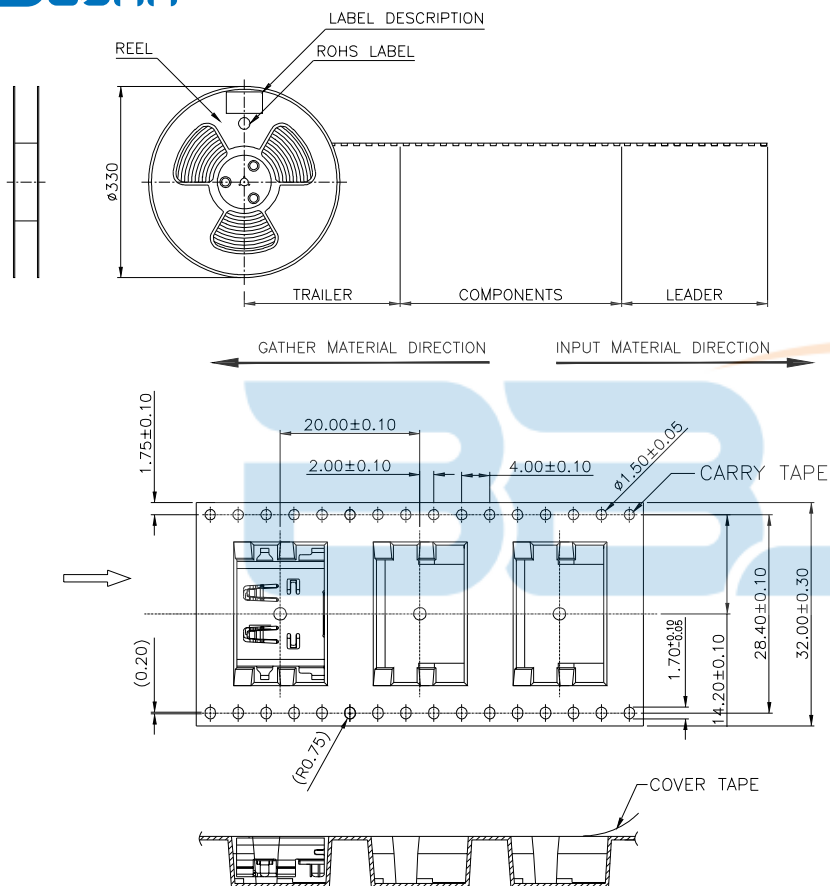

Notes:

- 1.THE START AND END OF EACH REEL, BASED ON THE ACTUAL QUANTITY, RESERVED 5--15PCS SPACE;
- 2.COVER TAPE AND CARRY TAPE PEEL: 10g~130g; PEEL DEG.:165°~175°; PEEL SPEED: 250~300mm/min;
- 3.QTY': 500PCS/REEL, 10REEL/CARTON, TOTAL 5000PCS/CARTON;

GENERAL TOLERANCES
(UNLESS SPECIFIED)

ITEM	MM	INCH
3 PLACE	± 0.15	± 0.005
2 PLACE	0.25	± 0.01
1 PLACE	± 0.35	± 0.015
0 PLACE	± 0.50	± 0.02



深圳市步步精科技有限公司

TITLE:

HDMI 母座 四脚插沉板1.8 (端子DIP) L=12.55 平口铜壳

DRAWN/ DATE	设计 HMY	SIZE:A4	UNIT:MM.	PART.NO: 124-222-190010-H5G	REV.: 版本
CHECKED/ DATE	审核 LYX	SCALE: 1:1	PROJECTION		
APPROVED/ DATE	核准 LJP	DWG. PATH	0409-1	SHEET: 页码	