

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

备注:

1) 材质:

- 1-1 本体:LCP 94V-0 黑色
- 1-2 端子:C2680/H65 T=0.20mm
- 1-3 外壳:SPCC T=0.50mm

2) 镀层:

- 2-1端子:所有面镀镍, 接点镀金G/F 焊脚镀锡50u"MIN,
- 2-2外壳:镀镍50u"MIN

3) 技术规格


- 3-1. 额定电压:40V
- 3-2. 额定电流:0.5A
- 3-3. 绝缘电阻:100兆欧最小
- 3-4. 接触电阻:30豪欧最大
- 3-5. 操作温度:-20度到85度
- 3-6. 插入力:44.1牛最大
- 3-7. 拔出力:9.8牛最小, 44.1牛最大
- 3-8. 耐久:10000次

4) 标"~"的QC重点标制尺寸

RECOMMENDED PCB LAYOUT (T:1.60mm)



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG,NO: 0006-1	DR. TSP	.X: ±0.38 .XX: ±0.25 .XXX: ±0.13 X*: ±3" .X*: ±2" .XX*: ±1"	NAME: HDMI 19P 母座 90度 四脚贴片 带柱 端子SMT L=11.55 平口 LCP黑胶 铁壳 APPD. JM_Zheng CHKD. LYX PJ. NO.: 124-221-190008-T1G SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

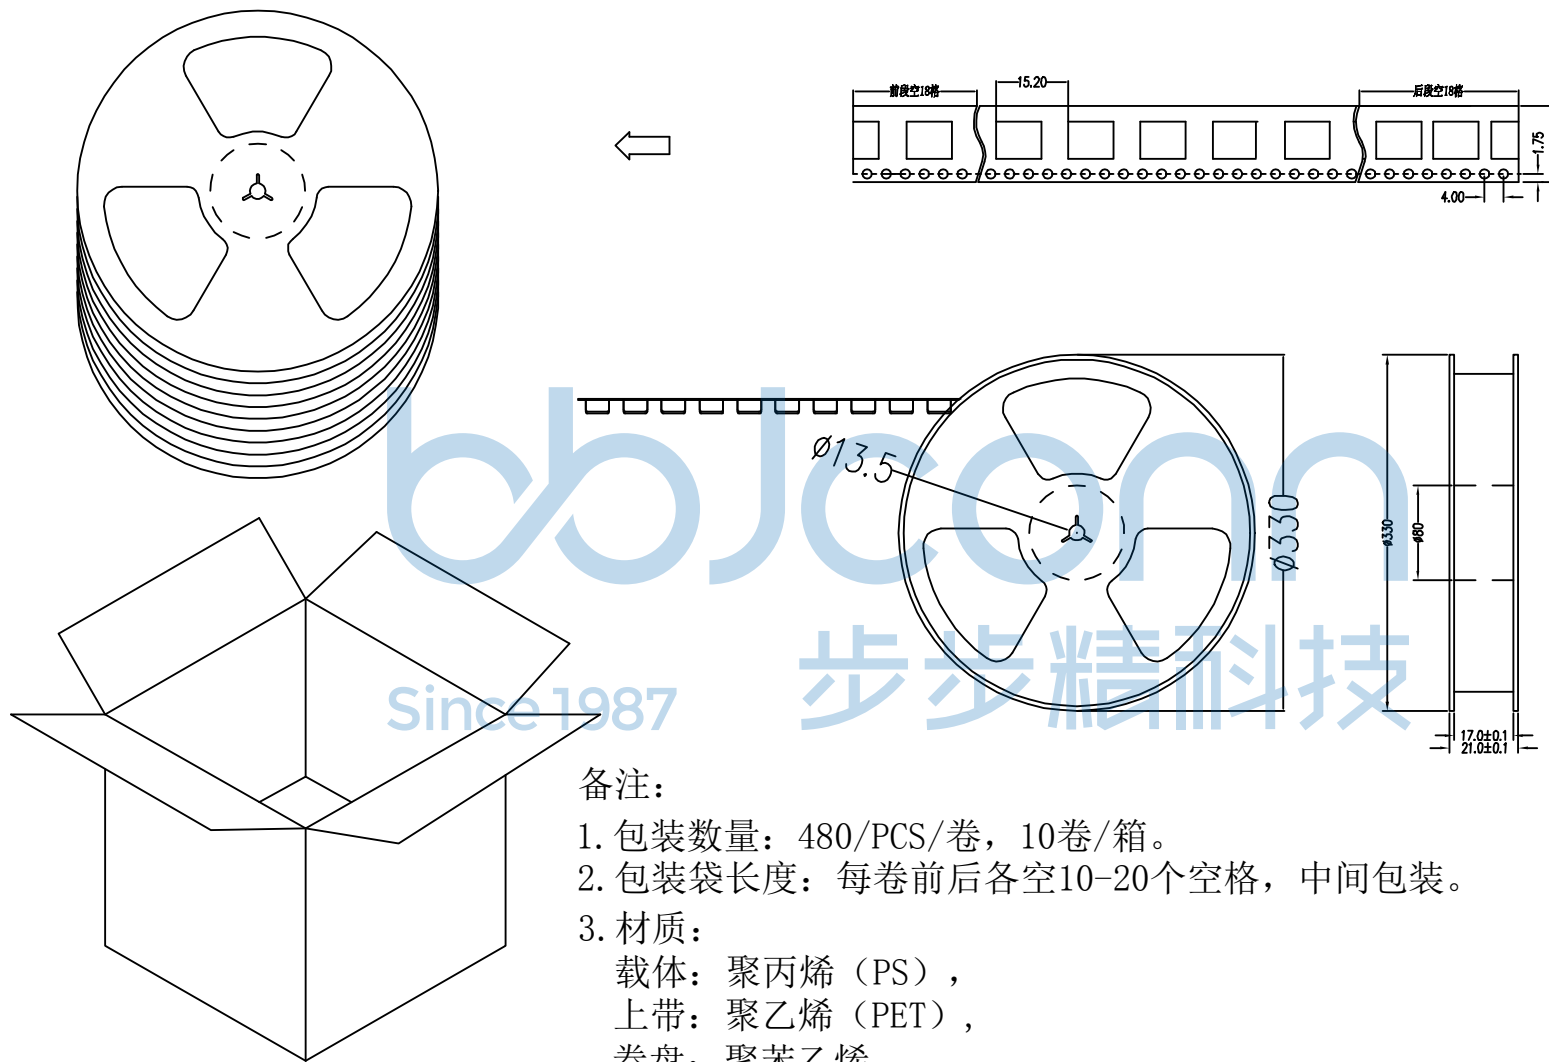

备注:

1. 包装数量: 480/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS) ,
上带: 聚乙烯 (PET) ,
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"	
APPD.	JM_Zheng	NAME: HDMI 19P 母座 90度 四脚贴片 带柱 端子SMT L=11.55 平口 LCP黑胶 铁壳	
CHKD.	LYX	PJ. NO.: 124-221-190008-T1G	
PDWG.NO:	0006-1	SIZE: A4 DRW NO.:	
DR.		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	