

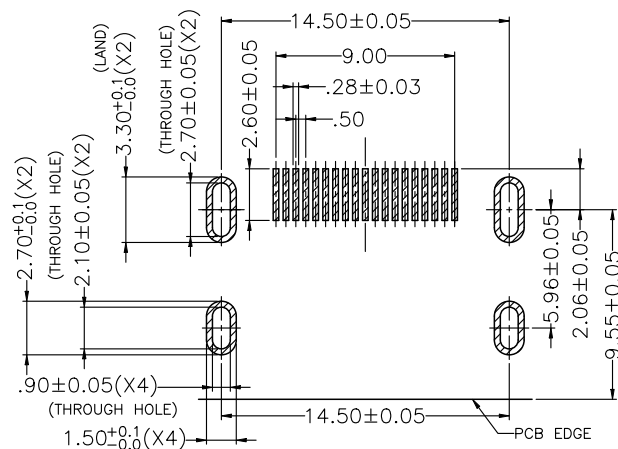
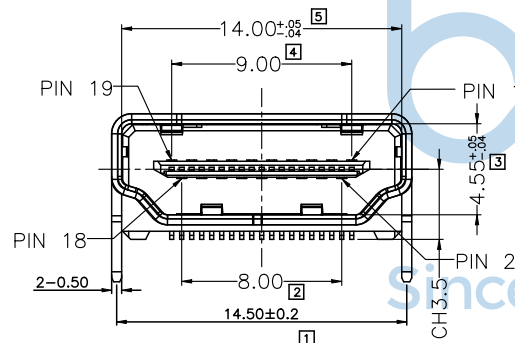


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

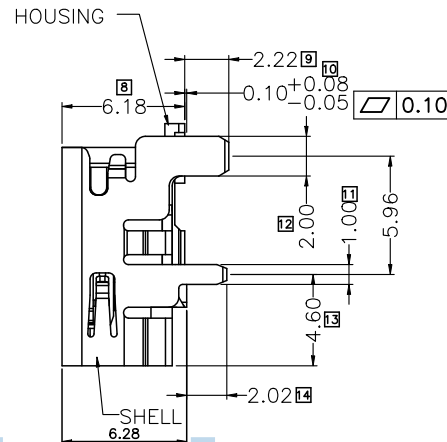

RECOMMENDED PCB LAYOUT(TOP VIEW)
(THICKNESS=1.6±0.05mm)

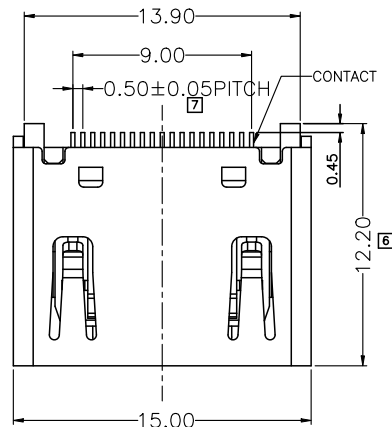

SPECIFICATION

1. Electrical characteristics

Contact Current Rating:0.5 A

Dielectric Withstanding Voltage:300V AC

Insulation Resistance:a. Mate 100MΩ MIN at 500V/DC

b. Unmate 10MΩ MIN at 150V/DC

Contact Resistance:30mΩ MAX

Temperature Range:-20° C to +85° C

2. Mechanical

Mating Face:44.1N MAX

Unmating Face:9.8N MIN;39.2N MAX

Durability:10000 Cycles

3. material:

HOUSING:THERMOPLASTICS HIGH TEMP LCP+GLASS

FIBER BLACK COLOR,UL94V-0

CONTACT:Copper Alloy ,T=0.20MM

SHELL:Copper Alloy (SPCC) ,T=0.50MM

4. PLATING:

CONTACT:1~30u" GOLD/TIN PLATING ON CONTACT AREA

100u"MIN, TIN PLATING ON SOLDER TAILS

50u"MIN, NICKEL UNDERPLATING OVER ALL

SHELL: Gold-plated G/F

5. "*"Key control size



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: JDMI 2.1 19P 母座 板上四脚插 L=12.20 平口 LCP黑胶 铜壳镀金G/F 端子SMT	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"		PJ. NO.: 124-221-190009-H2G SIZE: A4 DRW NO.:	
APPD.		JM_Zheng		FINISH: SEE NOTES MAT'L.: SEE NOTES	
CHKD.		LYX		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/3	
PDWG. NO: 0301-1		DR. TSP			

封装作业方向

前段空8穴CARRIER

中间下料500PCS

圆链孔

后段空8穴CARRIER

封装时收料方向

CARRIER TAPE

椭圆孔

圆孔

标签

REEL

外径330mm
内径100mm

COVER TAPE



10	保护带	10条/箱	
9	外箱	1个 (35*35*32.5CM)	
8	纸板	2个/箱	
7	三角衬	4个/箱	
6	防水袋	1个/箱	
5	标签	11张/箱	
4	元件	500PCS*10卷/箱	
3	REEL	330*29*10组/箱	A蓝
2	Carrier Tape	24mm*16mm*8M/R	
1	Cover Tape	宽21.0mm*8M/R	
序号	名称	规格数量	备注



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0301-1



深圳市步步精科技有限公司

.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13 X*: $\pm 3'$.X*: $\pm 2'$.XX*: $\pm 1'$

NAME:HDMI 2.1 19P 母座 板上四脚插 L=12.20
平口 LCP黑胶 铜壳镀金G/F 端子SMT

APPD. JM_Zheng

PJ. NO.: 124-221-190009-H2G


CHKD. LYX

SIZE: A4 DRW NO.:

DR. TSP




FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/3

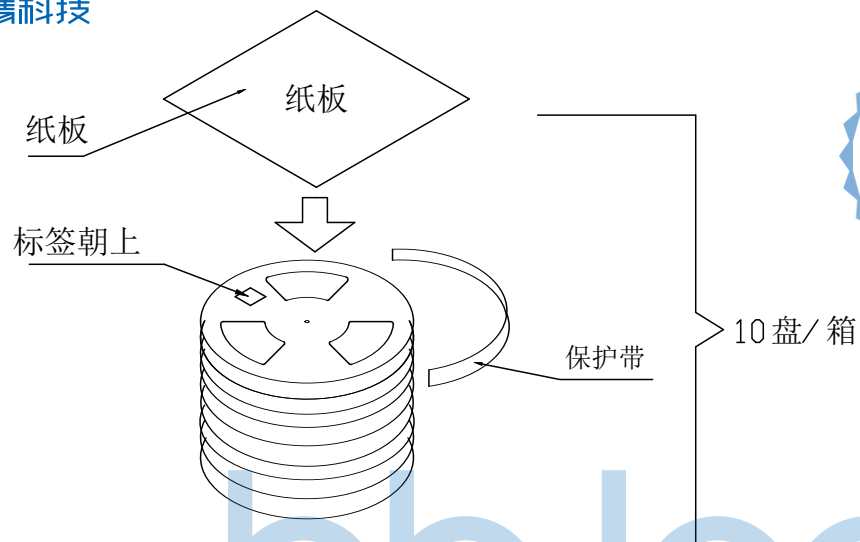

封装规范:

1. 外箱底部先垫一片纸板
2. 外箱四个内角各放置一个角衫
3. REEL标签一律朝上
4. 把卷装好的产品平放防水袋
5. 将包装好的产品放进外箱
6. 上层放一片纸板
7. 标签贴于箱外
8. 包装数量: 500pcs/盘, 10盘/箱, 5000pcs/箱

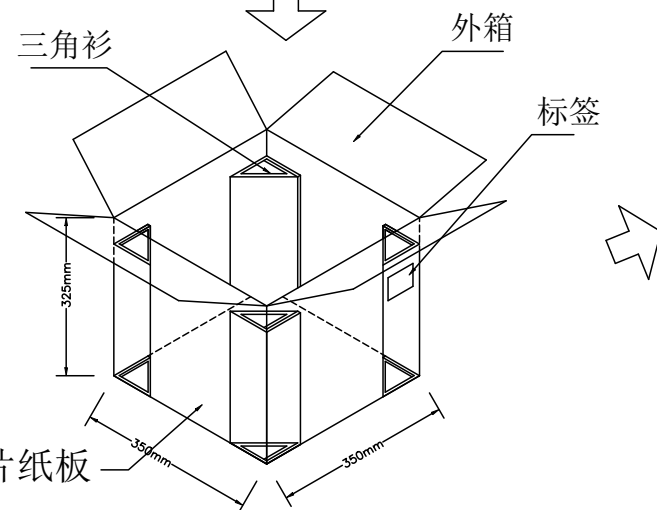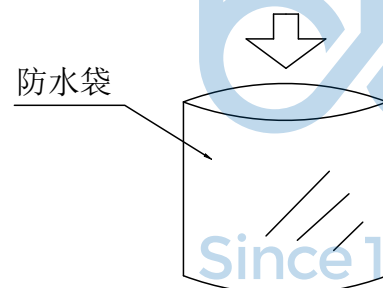

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: HDMI 2.1 19P 母座 板上四脚插 L=12.20 平口 LCP黑胶 铜壳镀金G/F 端子SMT	
.X: ±0.38	X*: ±3"	APPD. JM_Zheng		PJ. NO.: 124-221-190009-H2G	
.XX: ±0.25	.X*: ±2"	CHKD. LYX		SIZE: A4 DRW NO.:	
.XXX: ±0.13	.XX*: ±1"	DR. TSP		FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG. NO: 0301-1		SCALE: N/A		REV.: A0	UNIT: mm
				PAGE: 3/3	